


AUTO SAFETY HOTLINE		FOR AGENCY USE ONLY	
 U.S. Department of Transportation National Highway Traffic Safety Administration		Child Safety Seat Questionnaire NATIONWIDE 1-800-424-6323 DC METRO AREA (202) 368-6123	
		Date Received 2004 NOV -9	00-07 08-12-02 09-11 10-11
OWNER INFORMATION (Type or Print)		Reference No. 10101323	
Name	[Redacted]	Home Phone	Work Phone
Street	[Redacted]	[Redacted]	
City	Cranford	State	NI
		Zip Code	[Redacted]
Do you authorize NHTSA to provide a copy of this information to the manufacturer of your Child Safety Seat? In the absence of an authorization, NHTSA WILL NOT provide your name and address to the vehicle manufacturer.			
Signature of Owner [Redacted]			Date 10.28.04
CHILD INFORMATION			
[Redacted]	Age	Height/Length	Weight
[Redacted]	11 mo.	24 inch	19 lbs.
CHILD SAFETY SEAT INFORMATION (As identified on the label)			
Manufacturer	Model Number and Name	Date Manufactured	
Dorel Juvenile Grp.	Intera-22-460-BBF	9/02/04	
Seat Type: <input type="checkbox"/> Purchased <input type="checkbox"/> New <input type="checkbox"/> Used <input type="checkbox"/> Claimed through recall program <input type="checkbox"/> Gift <input type="checkbox"/> Borrowed Date:	Purchased From: Toys R Us Jersey City, NJ	Failed Part Name (Describe failure below): LATCH straps	
VEHICLE INFORMATION			
Make of Vehicle	Model of Vehicle	Year of Vehicle	
Toyota Sequoia	Sequoia	2001	
ACCIDENT INFORMATION (If applicable)			
Accident? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Number of Injured	Number of Fatalities	Police Report Filed <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Child Seat Location: <input checked="" type="checkbox"/> Front <input type="checkbox"/> Rear <input type="checkbox"/> Center	Facing Direction: <input type="checkbox"/> Forward <input checked="" type="checkbox"/> Rearward		
DESCRIBE PROBLEM/DEFECT IN DETAIL (state method of securing child and seat)			
* Difficult to install. Confusing instructions as pertains to threading LATCH straps for rear facing installation. LATCH straps too short to install seat rear-facing. Illustrations not clear * (see attached)			
CONTINUE ON BACK IF NEEDED			
<small>The Privacy Act of 1974—Public Law 93-579 This information is requested pursuant to authority vested in Chapter 201 of Title 46 of the United States Code. You are under no obligation to respond to this questionnaire. Your response may be used to assist the NHTSA in determining whether a manufacturer should take appropriate action to correct a safety defect. If the NHTSA proceeds with administrative enforcement or litigation against a manufacturer, your response, or a statistical summary thereof, may be used in support of the agency's action.</small>			


Rear-Facing Installation with
LATCH Inside LATCH Base




1 Do not use the LATCH system along with the adult lap or lap/shoulder belt.
To thread LATCH belts: Pull the seat pad off the front corners of shell.




2 LATCH adjuster can be on either side, but belt should not be twisted.
Route entire LATCH belt through the upper slot in side of shell.

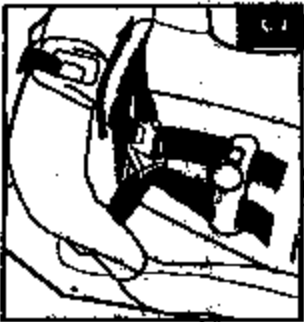

3 Reach under pad, pull one LATCH hook between rear harness slot and buckle strap.

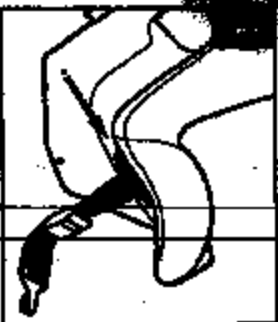

4 Push LATCH hook through the rear-facing belt path slot.

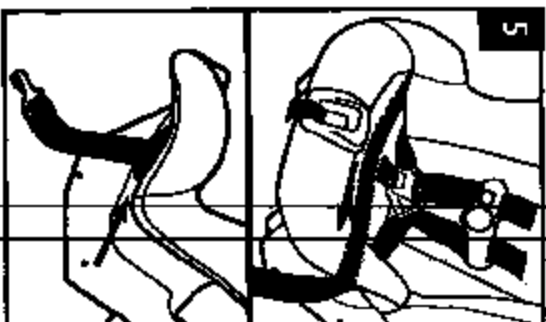

5 Pull other end of LATCH hook between buckle strap and rear harness slot. Push LATCH hook through the other rear-facing belt path slot.



6 Put seat pad back over corners of shell.
Completed threading of the LATCH system rear-facing is shown.