



TRIPLE E RECREATIONAL VEHICLES
A DIVISION OF TRIPLE E CANADA LTD.

P.O. Box 1230 Winkler MB,
Canada R6W 4C4

PHONE: (204) 325-4361

FAX: (204) 325-5241

tripleerv.com

March 10, 2010

Recall Notification CA#7420

Dealer Name
Address

Retail Sold Unit(s):
Stock Unit(s):

This notice is sent to you in accordance with the requirements of the National Traffic & Motor Vehicle Safety Act. Triple E Recreational Vehicles has decided that certain 2010 Regency GT28DB & 2010 Regency GT29DB manufactured between August 2009 & February 2010 fail to conform to Federal Motor Vehicle Safety Standard No. 571.207, "Restraining device for hinged or folding seats or seat backs."

Triple E Recreational Vehicles is Recalling certain 2010 Regency GT28DB & 2010 Regency GT29DB motorhomes. This notification will advise of an issue that relates to personal safety.

Description of Noncompliance:

The easy-bed sofa option installed in the above mentioned motorhomes were manufactured without the roll-over safety locking latch. In the event of a motor vehicle roll over the easy-bed sofa may want to open, with the weight of a seat belted occupant, causing the occupant to be injured from the seat belt.

To Have This Modification Performed:

We request your assistance to have this non-compliance issue corrected. Enclosed please find instructions to perform this recall. Please order the necessary parts from Triple E RV parts department. Labour used to perform this correction may be claimed via our normal warranty procedures. Insure the warranty claim used to receive credit for this recall notification only lists the item mentioned in this recall notice. The retail owner has been sent a form which they are requested to have with them for their appointment, please complete the form and return with the warranty claim.

Labour to perform this Recall: 0.4 hrs/per unit

Thank you for your anticipated assistance and please do not hesitate to contact us should you require additional information.

Sincerely,

Brad Wall
Warranty Manager

BW/wcw

Enclosures



RECALL NOTIFICATION CA#7420

Please complete this form indicating Recall Notification CA#7420 has been installed in accordance with this Recall.

Customer Name: _____

Serial # _____

Address (if different) _____

Date Recall Completed _____

Service Center performing Recall: _____

Address: _____

Signature of Service Manager: _____

Signature of Customer: _____

Please take this form with you to your appointment, having your dealer complete. The service center will return form with the warranty claim.

Brad Wall
Customer Relations/Warranty Manager

3835

3417-EASY BED LOCK Upb. Procedure

Flexsteel Ind. Inc.

2nd proto


Style: 4320-60EB
 Division: RV
 Series: 4000
 Unit: EASY BED
 Cost Date: 6-11-99
 Issue Date: 6-11-99
 Description: EASY BED WITH ARMS & FRT PANEL

Group:
 Approved:
 Date:
 Modified:
 Modified:

June 11, 1999
 December 03, 1999 #4042-
 2:57 pm

Page 16 of 35

Flexsteel®
 America's Seating Specialist

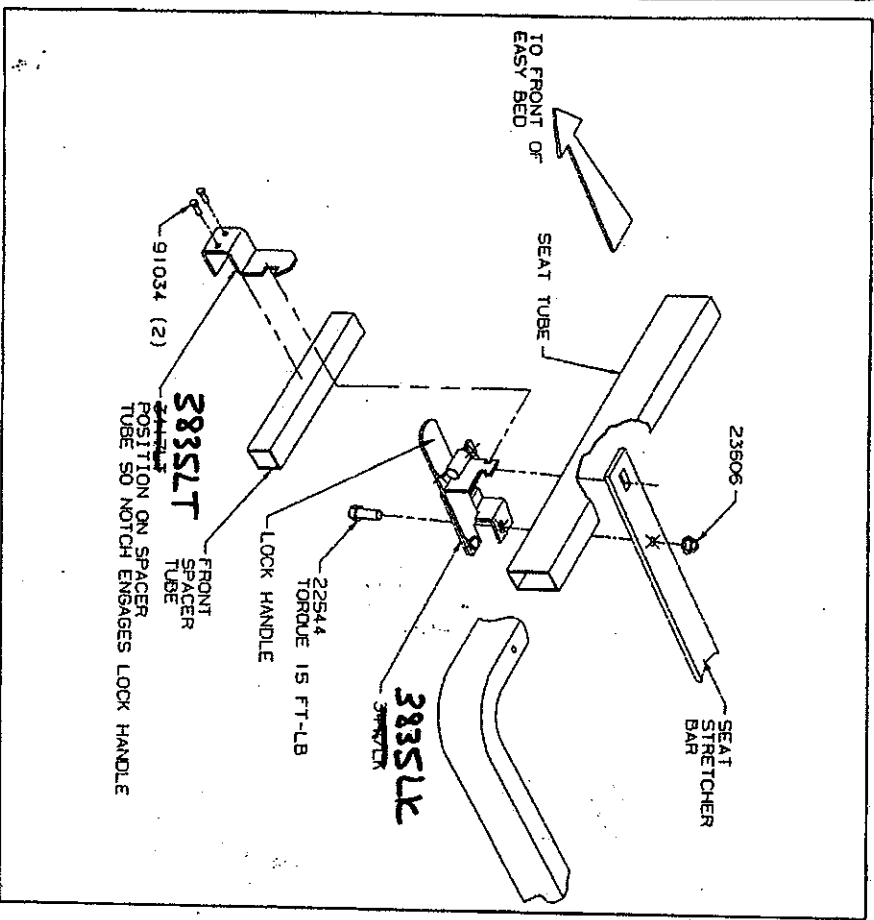

- OPTION 38 "L": NO LOCK ASSEMBLY
 OPTION 38 "L": LOCK ASSEMBLY
1. Insert the tab on 3417LK into the slot in the Seat Stretcher Bar. Rotate the 3417LK until the slot in 3417LK lines up with the hole in the Seat Stretcher Bar.
 2. Insert a 22544-.312-18UNC-2A X .750 GRADE 5 HEX HEAD SCREW (supplied) thru the slot in 3417LK and the hole in the Seat Stretcher Bar as shown.
 3. Secure with a 23606-.312-18UNC-2B HEX FLANGE NUT (supplied) on the upper side of the Seat Stretcher Bar as shown. Torque 22544 to 15 FT-LBS.
 4. With the Bed closed, position the 3417LT on the Front Spacer Tube as shown. Slide the 3417LT on the Tube until the notch engages the 3417LK lock Handle. Move the 3417LT away from the 3417LK approximately 1/16" for clearance.
 5. Secure the 3417LT to the Tube with (2) 91034-#10-16 X .750 HEX WASHER HEAD SELF-DRILLING SCREW (supplied) as shown.
 6. Open and close the Bed several times to insure proper Lock Operation.
- NOTE: FOLD #448 E-Z BED RELEASE TAG AT CUT & SLIDE OVER LOCK HANDLE & ATTACH WITH A 4" PIECE OF MASKING TAPE.