




## Procedure to add In-line Fuse

- 1) Locate positive (+) wire at trailer battery. This would be a red #8 wire that feeds the 12 V Junction Box at the front of the trailer under the Goose Neck Coupler. The 7-way trailer/truck lead connects to this as well.
- 2) Turn courtesy light "on" by the junction box. Loosen the nut that holds the red #8 wire to + terminal at battery. To verify that you have the correct wire the light will no longer work.
- 3) Bring the end of this wire away from battery, cut off ring terminal. Strip end of this wire ½". Attach this end to stripped end of the in-line fuse (provided) with the sealed twist cap connector (provided).
- 4) Attach other end of in-line fuse (with ring terminal) to the + battery post, and the courtesy light should work again.
- 5) Reinstall battery cover, straps to original position.
- 6) Bison Coach will **pay .5 hour** for this procedure. Be **SURE** to add **Claim Code # 9010** when submitting.
- 7) Order **Kit #82316**

If you see the below in-line Fuse or Mini Breakers unit is OK

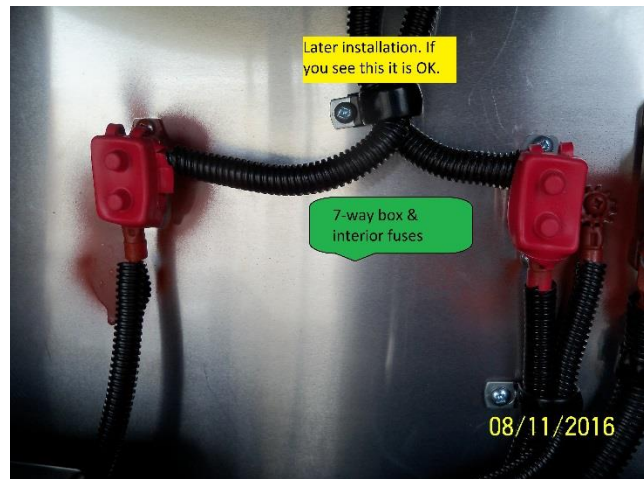



- #1 Locate positive (+) wire
- #2 Loosen Nut
- #3 bring wire away from battery, cut off ring terminal, strip end 1/2", attach this to stripped end of in-line fuse wire with connector provided
- #4 attach ring terminal end to battery + post.



- Junction box as described in #1
- Courtesy light as described in #2 as well as #4



- Parts that are supplied;
- 30 amp in-line fuse link
- Sealed wire cap
- Order Kit #82316**