

XX/XX/10

## Federal Recall Information

---

11KWC

### Supplier

Kenworth Truck Company

---

### Description

T440 Quick Release Valve Missing

---


### Introduction

Kenworth Truck Company has decided that certain Kenworth T440 vehicles manufactured at Kenworth's Ste Therese plant between October 18, 2010 and February 9, 2011, fail to comply with the requirements of Federal Motor Vehicle Safety Standard, Title 49 Part 571, Standard 121 "Air brake systems". A total of 3 US and 2 Canadian trucks are involved in this recall. The chassis list and a copy of the customer letter are attached. The DWC and SIR online systems indicate chassis involved in this recall with the designator of "**11KWC**".

---

### Situation

The quick release air valve required in the full truck service brake air line gladhand connection may have not been installed in certain vehicles (Ref. Figure 1). The absence of the quick release air valve may allow the full truck service brake air line gladhand release timing to exceed the threshold of 0.75 seconds failing to comply with the requirements of FMVSS 121.

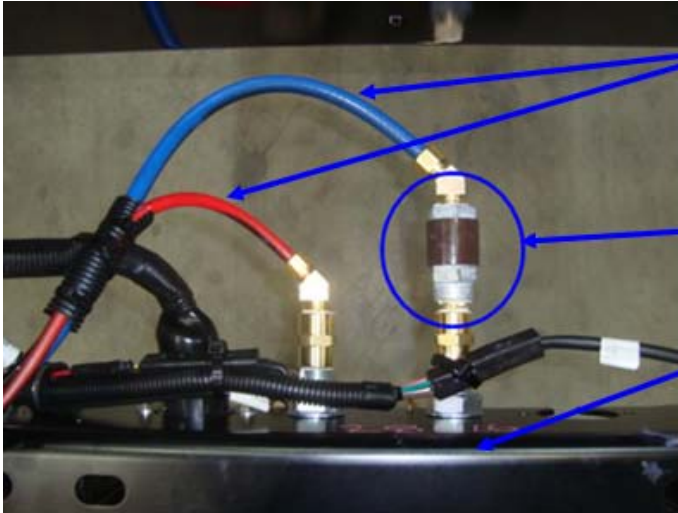

Service And Emergency  
Brake Air Lines For Full  
Truck Gladhand Connections

Brown Valve Shown May  
Have Not Been Installed

End Of Frame Crossmember  
(Gladhands On Opposite Side  
Of Crossmember Not Shown)

Fig. 1

## Resolution

The remedy of the recall will involve installation of the quick release air valve in the full truck service brake air line with gladhand connection as shown above in Fig. 1.

**It is a violation of Federal law for a dealer to sell or lease new vehicles covered by this recall until the defect or noncompliance has been corrected.**

## Warranty

The DWC system will indicate chassis involved in this recall with the designator of "**11KWC**" in the campaign field.

**Submit Quick Claim 11KWC.**

## Parts

Install the following parts:

QTY/TRK	PPD PN	DESC
1	4000-4	VALVE-CHECK
2	FG5016	FITTING-CMPRSN 45
1	AP2704	ADAPTER-PIPE BRS

## **Labor**

Quick Claim 11KWC will pay 0.5 hours for this repair.

---

## **Procedure**

Install the quick release valve per Fig. 1 above.

---

## **Attachments**