



SAFETY RECALL

TITLE: Addition of a lift door telltale

TO: Micro Bird's dealer and end users

PRODUCT: MBII MPV 2010 et 2011

FROM: Micro Bird After Sales and Warranty department

Reference : 11-043-LDU

PLANNING INFORMATION

Description: This document contains instructions to add a green telltale (in the control panel) linked to the lift door, visible by the driver, that activates when the lift door is not fully closed and the vehicle ignition is activated.

Compliance: Compliance with this Safety recall is mandatory. Claim under warranty must be sent to Corp. Micro Bird inc. within 45 days of the repair date.

Manpower: Corp. Micro Bird allocates approximately 10 minutes to perform this recall.

Material Availability: The requested parts to perform this service bulletin will be shipped from Corp. Micro Bird Inc. at no charge.

MATERIAL INFORMATION

The following parts are required to perform this modification:

Part number	Description	Quantity	Provided
27DZZ005	SUPP FLASHING SIGNAL	1	by Micro Bird
27EZ31	PILOT LIGHT FLASHING GREEN	1	by Micro Bird
27EZZ013	INSULULATED 10-12 FEM 0.25 CONNECTOR	1	by Micro Bird
761232	(K) BUTT SPLICE PVC 16-14GA	1	by Micro Bird

Modification Instructions


Notes: It is assumed that all of the procedures required to embody this modification will be performed according to professionally accepted standards.

Procedure


- 1- Remove 3 screws holding the top switch console to access wires.
- 2- Remove the plastic cover plate and install the new cap holding the light.



- 3- Locate the unused tan wire # 124 under the console, cut off the closed end connector and use a blue terminal junction to connect it to the light's red wire.

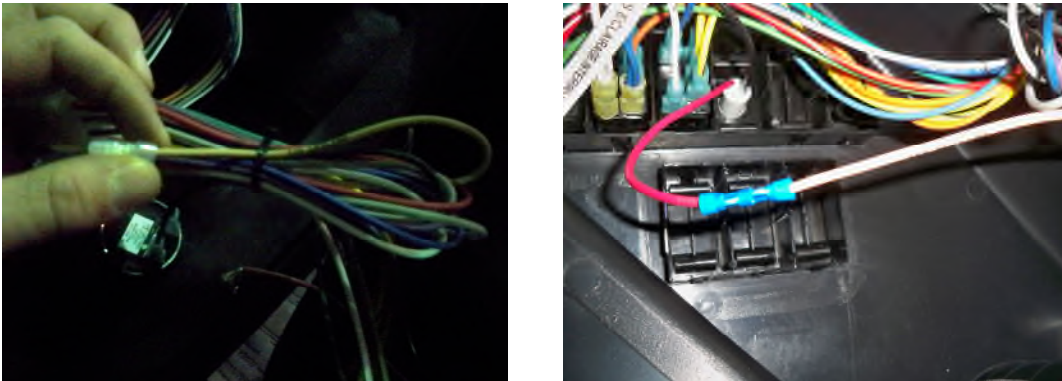

- 4- Connect the alarm's black wire with the white wire of the closest switch with the yellow female connector and reinsert in switch tab.

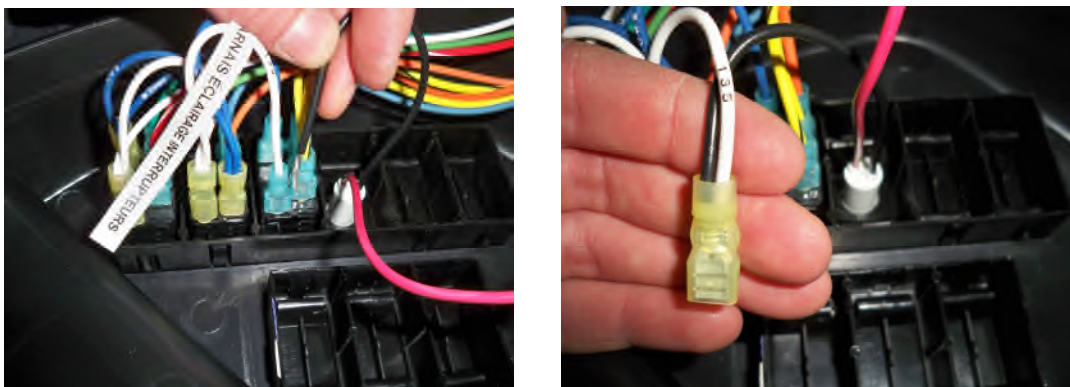

- 5- Reinstall switch console