




Tech Tips

TT 01-16-01

Date: February 5, 2016

2014-2016 Jetta 1.8T Golf - P05A3 Active Grille Air Shutter "A" Control Circuit Range/Performance

Please inspect the lower grill active shutter for any obstructions i.e. accident damage, snow, ice or debris.

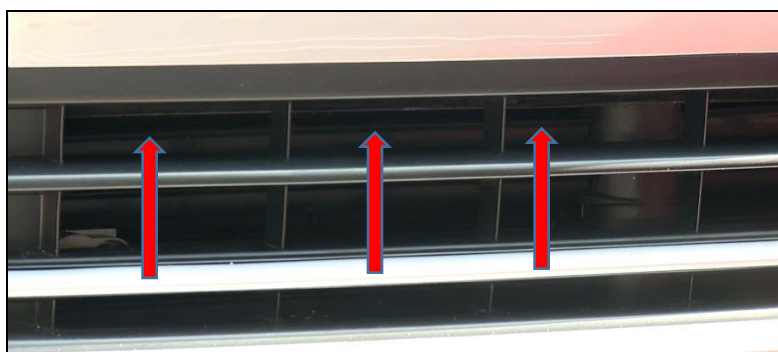

If an obstruction is found, please remove/clean active grill shutters and perform a road test until the vehicle reaches full operating temperature (80°C) to verify operation and recheck for any active DTC.

If obstruction is not found, please check circuit integrity at the V544 T4 as connector:

- Battery voltage on pin 4
- Ground on pin 1
- Check resistance of wire from T91/76 to terminal 3

If the correct readings are achieved, please replace the V544 motor and road test to verify operation.