

# Thor Motor Coach Recall Repair Instructions




Recall #	16V-329		
Description/Title:	<b>2017 Venetian, Tuscany, Tuscany XTE Power Loss</b>		
Affected Product Line(s):	<b>Certain 2017 Venetian, Tuscany and Tuscany TXE Units</b>		
Service Campaign # :	<b>RC000114</b>	Released Date:	<b>6.25.16</b>
Failure Code:	<b>TMCRC80449V</b>	Document Date:	<b>6.25.16</b>
Time Allowed:	<b>0.3 hr</b>	Document Revision:	<b>A</b>

It has been decided that certain TMC Tuscany and Venetian model motorhomes subject to this recall campaign have the isolator relay cable for the chassis battery incorrectly installed. This could cause a sudden unexpected loss of power with the motorhome. If the motorhome is travelling on the road and a loss power occurs, the vehicle operator could experience loss of vehicle control which could result in an accident.

## Instructions:

1. Unhook the Red Cable coming from the Isolator Relay.

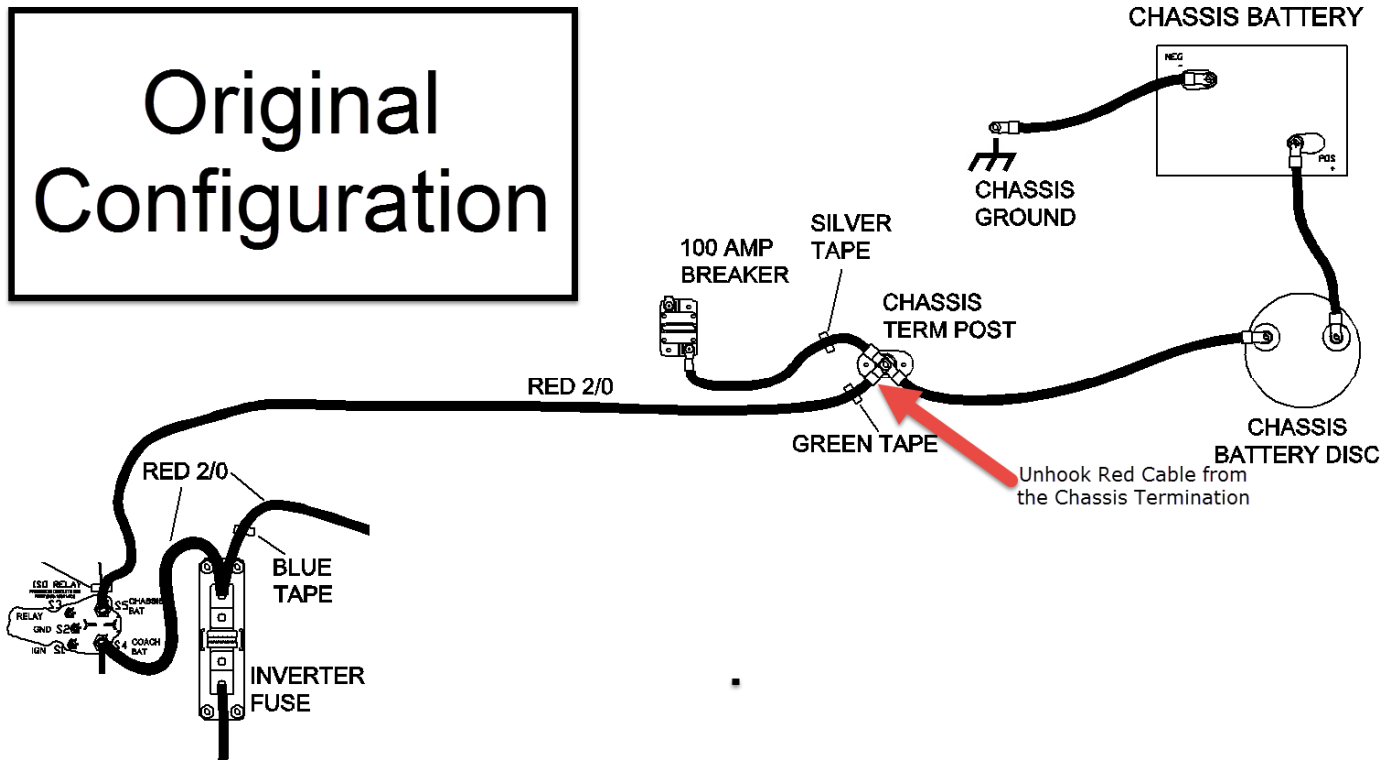

2. Attach it to the positive post of the Chassis Battery

New Configuration

