


Audio System Cuts Out When Using Right Turn Signal While Playing FM Radio

AFFECTED VEHICLES

2018 Accord

We're currently looking at an issue where the audio system cuts out when using the right turn signal while playing FM radio. Until we come up with a permanent solution, here's a temporary fix that's quick and easy and will prevent cutting out the noise:

1. Remove the passenger side kick panel, and find connector C405.
2. Install a ferrite clamp-on core on the black coax cable leading to the dashboard, near the connector.

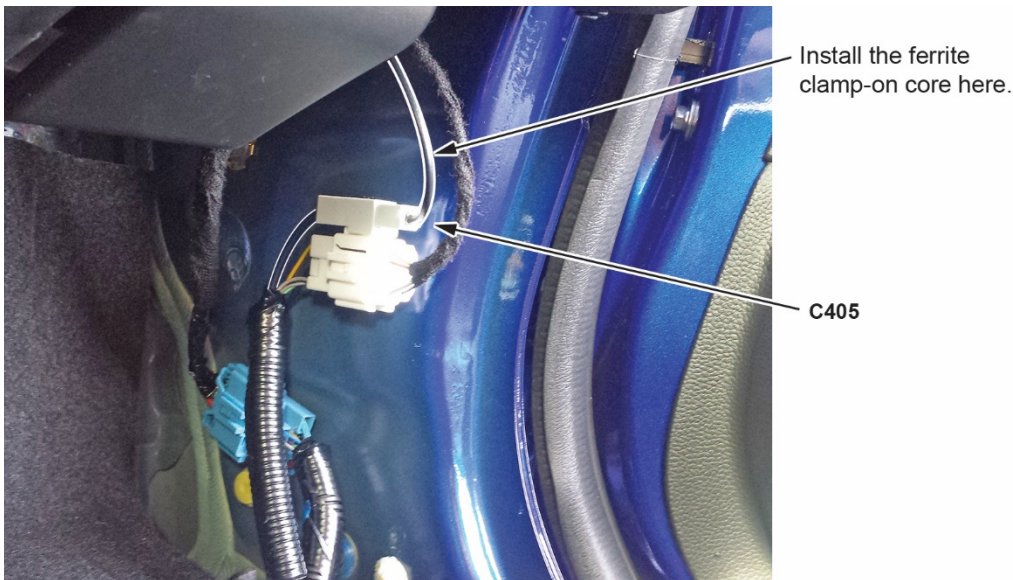

NOTE: Ferrite clamp-on cores are commercially available. Two suggested online sources are Mouser Electronics at www.mouser.com and Amazon at www.amazon.com.



3. Wrap the core with foam tape to prevent contact with the surrounding area.



FERRITE CORE
WRAPPED WITH FOAM

4. Install the kick panel.