



Thor Motor Coach Recall Repair Instructions

Recall # 17V-096

Description/Title: **2014-2016 Diesel Motorhome Windshield wipers**

Affected Product Line(s): **Certain Model Year 2014, 2015, & 2016 Tuscany and Palazzo Motorhomes**

Service Campaign # : **RC000128**

Released Date: **4/7/2017**

Failure Code: **TMCRC80459V**

Document Date: **4/7/2017**

Time Allowed: **0.2 hr**


Document Revision: **A**

It has been determined that the wiper arms on certain 2014, 2015, & 2016 model year Tuscany and Palazzo motorhome may not have been tightened properly at the time of manufacture.

NOTE: TAKE CARE WHEN REMOVING AND REINSTALLING ITEMS. TMC WILL NOT COVER ANY DAMAGES INCURRED DURING THE COMPLETION OF THE PROCESS.

Palazzo Instructions

Put the wiper arm in lock-back position.

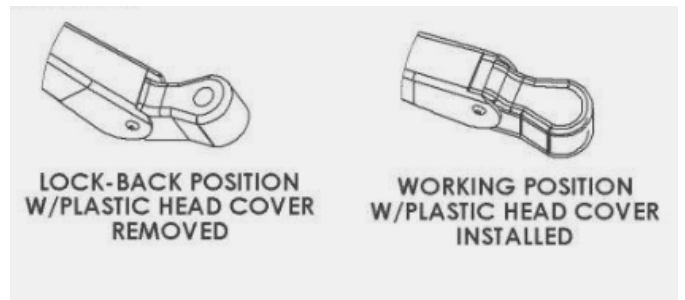

Gently remove the plastic head cover. Make sure the cover is not damaged during the removal process.

Tighten the nut to 30-35ft lbs of torque.


Reinstall cover.

Return arm to normal in-use position.

Repeat for other wiper arm

Tuscany Instructions

Carefully remove the plastic access cover with a small flat head screwdriver. Make sure the cover is not damaged during the process of removal.

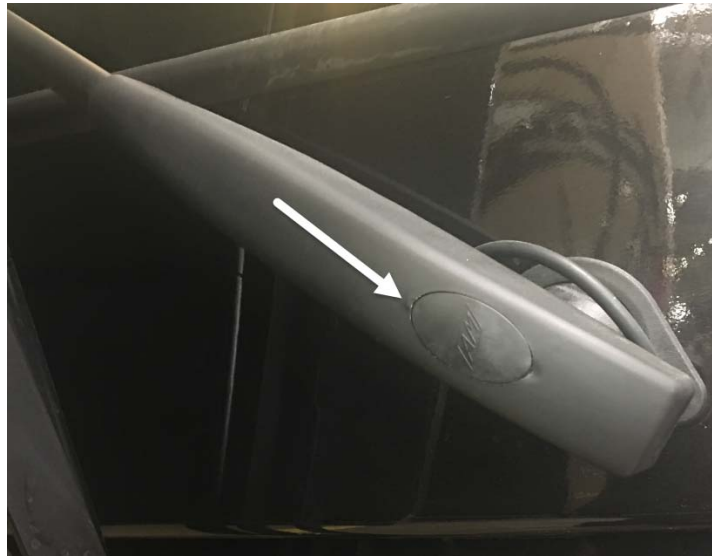

Put the wiper arm in lock-back position

Push the wiper hose out of the way.

Tighten the screw to 12ft-lb of torque.

Reinstall the cover.

Return arm to normal in-use position.

Repeat for other wiper arm