

IMPORTANT! U34 Safety Recall Update

By **Mopar** on Friday, April 27, 2018

APRIL 2018



TO: ALL ALFA ROMEO GROUP DEALERSHIPS IMPORTANT U34 SAFETY RECALL UPDATE WATER INTRUSION ON 2018 ALFA ROMEO STELVIO LIFT GATE

This communication informs dealers of important additional repair precaution and parts information regarding the U34 (rear lift gate water intrusion) safety recall on the 2018 Alfa Romeo Stelvio.

U34 RECALL OVERVIEW

Approximately 12,500 Alfa Romeo Stelvios have been identified as having potential water intrusion concerns in the rear lift gate. This concern will be addressed by installing additional sealing protection.

U34 REPAIR PRECAUTIONS

When removing the interior trim panel of the lift gate *please exercise care*. The clips utilized require the inner retainer to be released from the clip housing prior to pulling on the panel. Please reference the picture below showing the number and location of the trim clips. Please utilize:

- A trim remover tool (Special tool # C-4829A) or suitable trim stick to release the clips.




To remove the clip, slip a trim removal tool under the head of the retainer (shown in yellow) and press upwards.



**Part#
68255569AA
(Qty 2)**
*designated by
yellow arrows
below*



**Part#
68413365AA
(Qty 7)**
*designated by blue
arrows below*

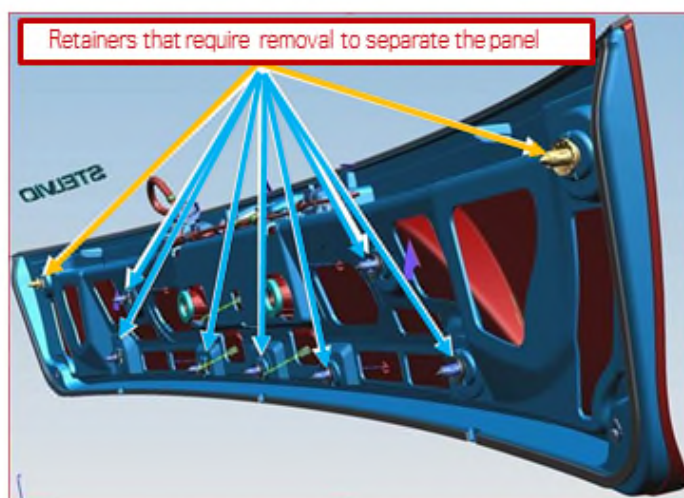


U34 CLIP INFORMATION AND AVAILABILITY

If, in the process of the recall repair, the clips are damaged, replacement clips will be available through Mopar. Below are descriptions and photographs of the parts for reference.

Parts will be allocated to dealers upon availability late the week of 4/30/18.

Part#	Pack Size (MSQ)
68255569AA	5
68413365AA	10

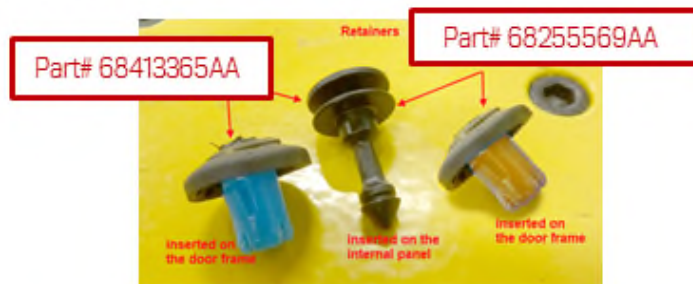

Please utilize this information to ensure all dealership personnel are aware of the campaign.

FCA appreciates your continued support on this campaign!