

January 25, 2019

Version 1

Safety Recall: ILX Fuel Tank Production Date Inspection

AFFECTED VEHICLES

Year	Model	Trim	VIN Range
2014-19	ILX	ALL	Check the iN VIN status for eligibility.

BACKGROUND

The fuel gauge may get stuck at times, causing inconsistent fuel level readings. This may cause the vehicle to stall, increasing the risk of a crash. Vehicles that have previously received service part replacement tank will require inspection of the tank production date to ensure it is not defective.

There are one of two service actions that can be performed. Check the iN VIN status for applicability.

- 19-007, *Safety Recall: 2018-19 ILX Fuel Tank Replacement*

OR

- 19-008, *Safety Recall: ILX Fuel Tank Production Date Inspection*

CLIENT NOTIFICATION

Owners of affected vehicles will be sent a notification of this campaign.

Do an iN VIN status inquiry to make sure the vehicle is shown as eligible.

Some vehicles affected by this campaign may be in your new or used vehicle inventory.

Failure to repair a vehicle subject to a recall or campaign may subject your dealership to claims or lawsuits from the client or anyone else harmed as a result of such failure. To see if a vehicle in inventory is affected by this safety recall, do a VIN status inquiry before selling it.

CORRECTIVE ACTION

Inspect the fuel tank and replace it with a new unit if necessary.

CLIENT INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by "do-it-yourselfers," and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Acura automobile dealer.

NOTE

For dealers experiencing a strong fuel smell from storing a fuel tank replaced under this service bulletin, the fuel tank may be disposed of immediately in accordance with local regulations. This only applies to the fuel tank replaced under this service bulletin. The published retention policy remains in effect for all other parts. If you have any questions related to this exception or other parts retention issues, contact the WPI Administrative Office at 937-642-2737.

WARRANTY CLAIM INFORMATION

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
3105J0	Inspect the fuel tank	0.3 hr	6FM00	Z3T00	B19008A	17044-TR0-A30

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
3105J0	Inspect the fuel tank	0.3 hr	6FM00	Z3T00	B19008B	17044-TR0-A30
A	Replace the fuel tank	2.1 hr				

Skill Level: Repair Technician

PARTS INFORMATION

Part Name	Part Number	Quantity
Fuel Tank	17044-TR0-A30	1



TOOL INFORMATION**NOTE**

If you do not have P/N **07AAA-SNA0100**, you can use **07AAA-SNAA101** as well.

Part Name	Part Number	Quantity
Fuel pump module locknut wrench	07AAA- SNA0100	1
Fuel pump module locknut wrench	07AAA- SNAA101	1

REPAIR PROCEDURE

1. Visually inspect the fuel tank's blow mold date (see illustrations below).

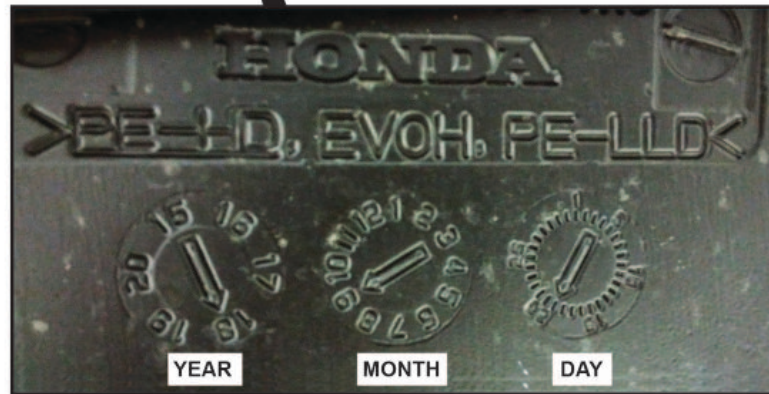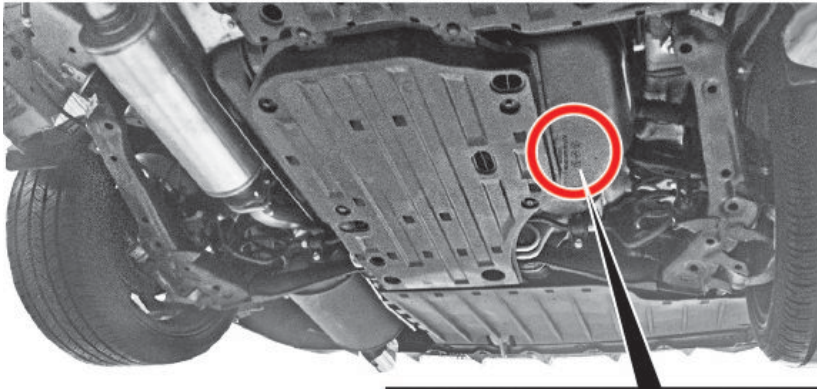

Year	Month	Day
2017	10	2, 3, 6, 7, 20, 21
2018	6	20, 21, 25
	7	20
	8	6, 7, 29, 30
	9	3, 9, 10, 13, 14, 19, 20
	10	24, 25, 31
	11	1

- If the fuel tank was produced on any of the dates listed above, go to step 2.
 - If the fuel tank was not produced on any of these dates, no further action is required.
2. Write down the mold date on the repair order, then remove and install the fuel tank. See the service information for details.

3. **California residents only:** Fill out a Vehicle Emissions Recall - Proof of Correction certificate, and use **Z3T** for the fuel tank as the recall number. Have the service consultant give the certificate to your client, and advise him or her to keep it as proof that the recall was completed. Your client will need to submit this certificate to the DMV only if the DMV requests it. If you need more certificates, use reorder number **Y0657**.

Vehicle Emission Recall - Proof of Correction				
License Number	Make	Year Model	Body Type	Vehicle Identification Number
Manufacturer			Recall Number Z3T	
The above described vehicle has been repaired, modified and/or equipped with new emission control devices to meet applicable California Emission Control Laws.				
Dealer's Name		Address, City, State and Zip		
Date		Dealership's Authorized Signature		
		X		
Return this certificate to DMV <u>only</u> when required - otherwise retain for your records.				

Y0657 ACL 24832 (0212)

END