



Mercedes-Benz

Campaign No. 2019080006, September 2019

TO: ALL MERCEDES-BENZ CENTERS

SUBJECT: **Model S-Class vehicles, (222 platform)
Model Year 2019
Rework torque of A-, B-, and C-pillar trims, as well as wheel arch liners**

Daimler AG ("DAG"), the manufacturer of Mercedes-Benz vehicles, has determined that on certain Model Year ("MY") 2019 S-Class vehicles, (222 platform) the A, B, and C pillar covers might not be installed according to current production specifications, an authorized Mercedes-Benz dealer will check the installation of the pillar covers on the affected vehicle and rework, if necessary.

Prior to performing this Recall Campaign:

- Please check VMI to determine if the vehicle is involved in the Campaign and if it has been previously repaired. Always Check VMI for any open campaigns, and perform accordingly.
- Please review the entire Recall Campaign bulletin and follow the repair procedure exactly as described.

Please note that Recall Campaigns **do not expire** and may also be performed on a vehicle with a vehicle status indicator.

Approximately 1 vehicles are involved.

Order No. P-RC-2019080006

This bulletin has been created and maintained in accordance with MBUSA-SLP S423QH001, Document and Data Control, and MBUSA-SLP S424HH001, Control of Quality Records.

Procedure

i The following work procedure must be performed on **both** A-, B-, and C-pillar trims, as well as the wheel arch liners.

The wheel arch liners as from the facelift are affected only if a side airbag in the rear (code 293) is installed.

1. Remove SRS cover on A-pillar and correct torque (**Nm** 5) (A, Figure 1).



Figure 1

2. Remove SRS cover on B-pillar and correct torque (**Nm** 5) (A, Figure 2).



Figure 2

3. Remove SRS cover on C-pillar and wheel arch and correct torque (**Nm** 5) (A, Figure 3).

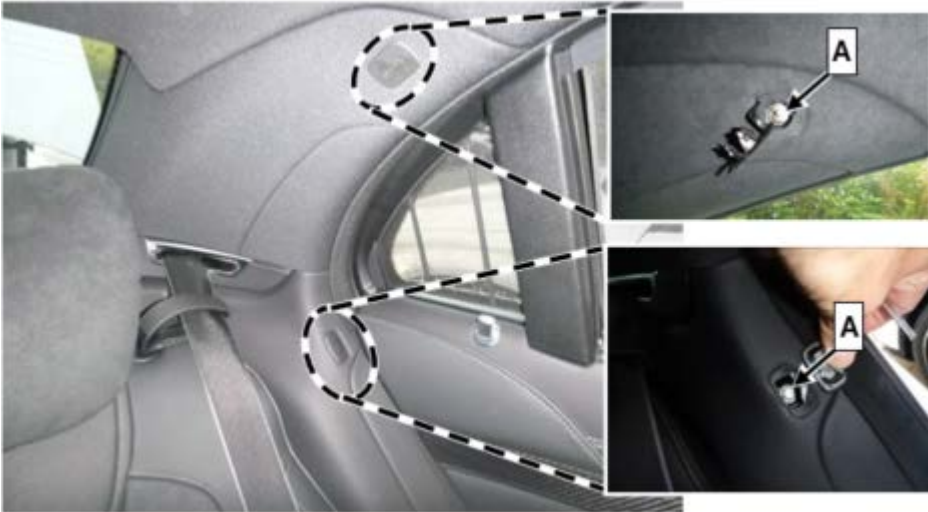


Figure 3

Warranty Information

Operation: Correct torque on pillar trims and wheel arch liners (02-1256)

Damage Code	Operation Number	Labor Time (hrs.)
63 910 04 8	02-1256	0.3

i **Note**

Operation labor times are subject to change.