

Taillight Dash Error Message – Resistors

Bulletin Type:	Recall	Publication Date:	June 2026
Bulletin #(s):	26V-361 USA 2026-269 CANADA	Make(s):	Jayco & Entegra Coach
Job Code(s):	9903657	Model(s):	Condor, Granite Ridge, Melbourne, & Qwest SE
Flat Rate(s):	9903657 – .75 HR - Installation of jumper harness	Model Year(s):	2026

Incident:	Dash is displaying taillight warning messages for right and left taillights when lights are functioning correctly.
Affected Units:	2026 Jayco Granite Ridge & Melbourne & 2026 Entegra Coach Condor & Qwest SE
Parts Kit: 26V-361	Parts Kit #: 26V-361
	1 Qty - HARNESS, RES 100 OHM HARN TLT SPNTR W/WIRE LEADS
Misc. Tools & Supplies:	Wire Strippers Ratchet with ½" socket and ½" Wrench
Parts Return Information:	N/A

TAILLIGHT DASH HARNESS REPLACEMENT INSTRUCTIONS

1. Disconnect the two 7-Way cavity plugs under the chassis. It is near the rear drive side leveling leg. (Figure 1)

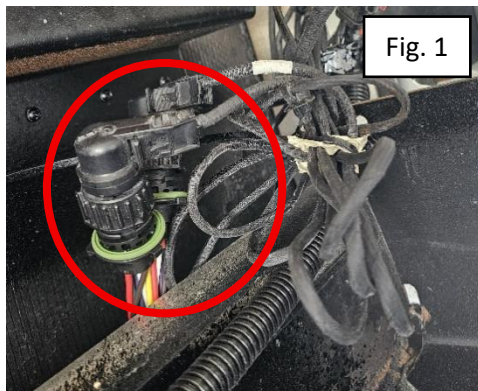


Fig. 1



WARNING



Ensure all power to the coach has been disconnected and the coach is fully powered off, prior to starting the repair.

2. On one of the plugs Locate Pin 7. Using Wire Strippers, remove the plug in pin 7. (Figure 2)
3. Insert one of the pins from the resistor harness into pin 7. (Figure 3)
4. Locate pin 7 on the second connector, remove the plug from pin 7. (Figure 2)
5. Insert the second pin from the resistor harness into pin 7 of the second connector. (Figure 3)
6. Re-connect the two 7-Way cavity plugs underneath the coach. (Figure 1)
7. Remove the bolt for the chassis ground near the driver side rear leveling jack using a ½" wrench and ratchet with ½" socket. Attach the chassis frame ground from the resistor harness to the bolt and re-install.
 - a. **Note: When adding the ground to the chassis frame ground stud, ensure there is a star washer on the stud and if not add one.** (Figure 4)
8. Mount the resistors to the frame rail. (Figure 5)
9. Secure any loose wiring using cable/zip ties or p-clamps

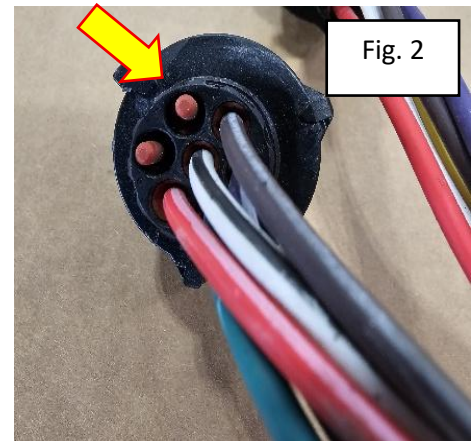


Fig. 2

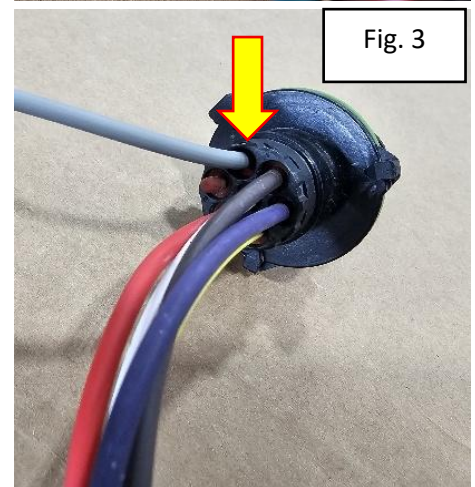


Fig. 3

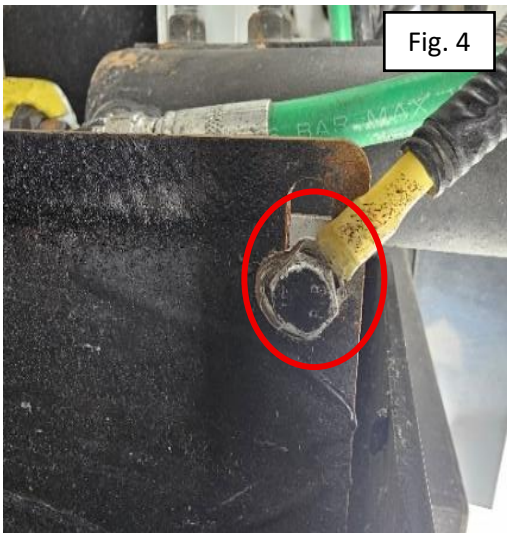


Fig. 4

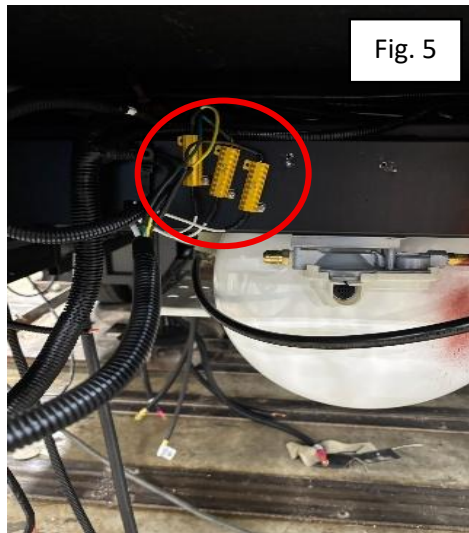


Fig. 5

Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540