



Countries: CANADA, UNITED STATES, MEXICO **Document ID:** IK0700051
Availability: ISIS, FleetISIS **Revision:** 1
Major System: EXHAUST **Created:** 12/20/2012
Current Language: English **Last Modified:** 12/21/2012
Other Languages: NONE **Author:** Charles Sun
Viewed: 224

[Less Info](#)[Hide Details](#)


Coding Information

Copy Link 	Copy Relative Link 	Bookmark  View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful  9	Not Helpful  1
---	--	---	--	---	--	--	--


Title: Rear Exhaust Manifold Leak**Applies To:** MaxxForce® DT, 9 and 10 (2010 M.Y.)

DESCRIPTION

When truck is serviced for rear exhaust manifold leak, check for presence of a square shaped ear at rear of exhaust manifold. Current production exhaust manifolds have been modified to remove ear and existing inventories had these ears machined off.



Current Manifold




Revised Manifold



Photo Showing the Revised Manifold

PARTS



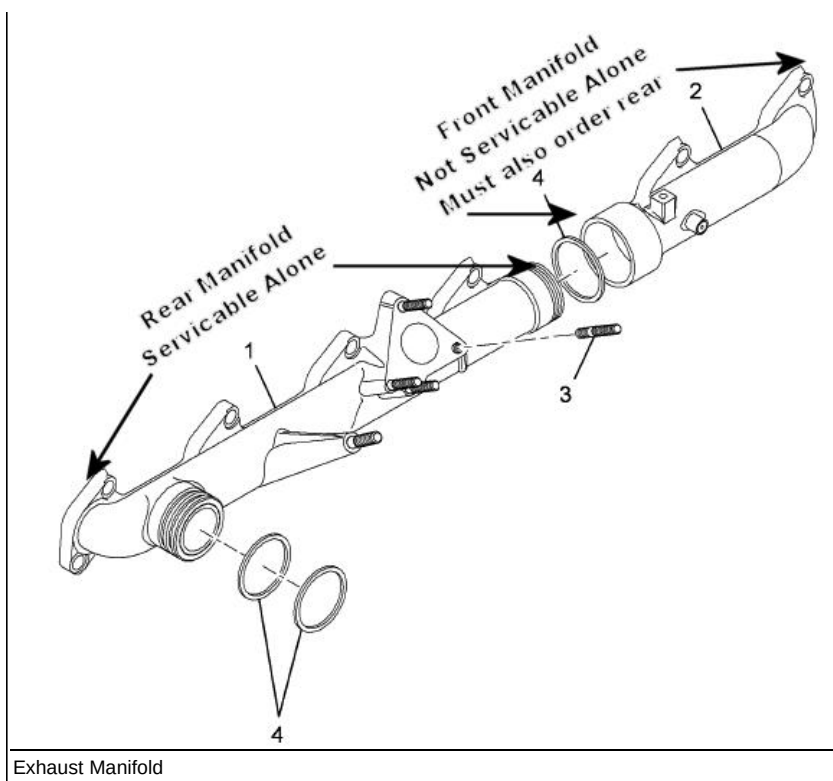

Item	Current Part	Old Part Number	Description
1	1883380C4	1883380C3	Rear Exhaust Manifold - Serviced Alone
2	1882405C2		Front Exhaust Manifold - Not Serviced Alone Must order Rear Manifold when replacing front
3	1845040C1		Studs Turbo adapter
4	1882696C1		Seal Exhaust Ring NOT SERVICED
	1882697C95	1882697C94	Complete Assembly - NOT SERVICED - Use components above

[Hide Details](#)

Feedback Information

Viewed: 223

Helpful: 9

Not Helpful: 1

No Feedback Found