

SB-10043568-6631

Select Country CANADA,
UNITED STATES, MEXICO
Availability: Internal, ISIS
Major System: ELECTRICAL
SYSTEM
Other Language availability:
English
Average Rating:

Number of Ratings:8

Doc ID: IK0800334
Language: English
Revision: 2.00
Created: 2/13/2012
Last Modified: 2/13/2012
Used: 81
Author: Eddie Panozzo

Rate this
Article:

[Copy Link](#)[Provide article feedback](#)

Was this document helpful?

[Yes](#)[No](#)[Bookmark](#)[Print](#)

Do not redistribute. For Internal Use Only.

Title:

WABCO 6S6M - 10 A Fuse to be used at location F11-D 4azx

Applies To:

ProStar, LoneStar, TranStar

DESCRIPTION

WABCO 6 Sensor 6 Modulator has an incorrect 5Amp fuse at location F11-D.

SYMPTOMS

- Fuse at F11-D is failing due to rating of 5 Amp

POSSIBLE DIAGNOSTIC TROUBLE CODES

SPN	FMI	MODULE	DESCRIPTION
2011	9	Cluster	Loss of data link from ABS controller


TROUBLESHOOTING

Fault codes related to ABS, place 10 Amp fuse at location F11-D

RESOLUTION**NOTE:**

ProStar Fuse Location Shown Below

Replace the fuse (location F11-D) with a 10 Amp fuse

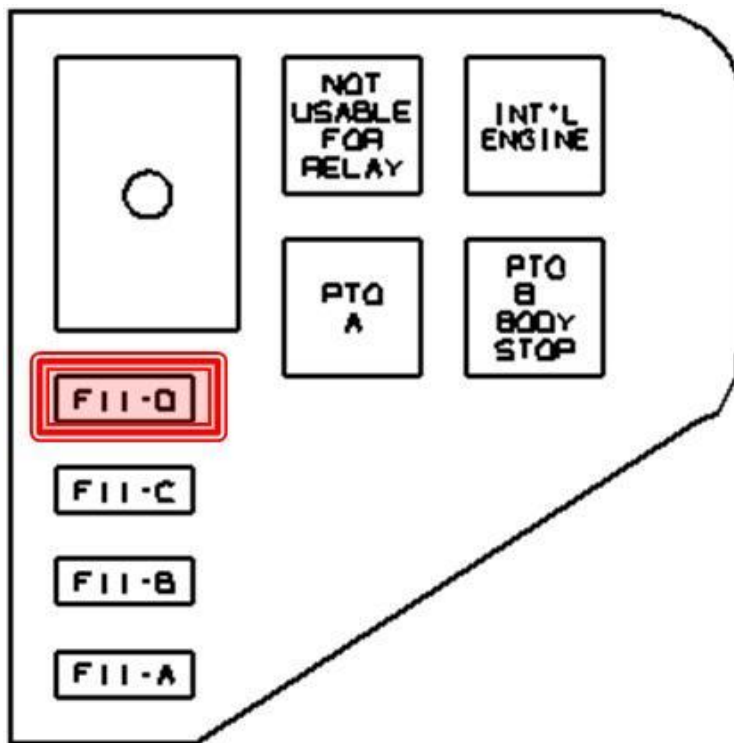

LOCATION	AMP		STD/OPT	DESCRIPTION
F11-D	5	IGN	STD	TRACTOR ABS ECU

Wabco 6 Sensor 6 Modulator
Uses 10 Amp

Feedback on this Article

(Hide Details)

Viewed: 35 (this is the # of times that an article was opened)

Used: 81 (this is the # of times that someone answered "Yes" the article did help them or it was attached to a case file)

No's: 0 (this is the # of times that someone answered "No" the article did not help them)

Average Rating:

Number of
Ratings: 8

Feedback Comments

There are no feedback comments on this article yet.