




MAINTENANCE INFORMATION

MI12-48

| | | | |
|-----------|--|-----------|--------------|
| DATE : | DECEMBER 2012 | SECTION : | 05 - Cooling |
| SUBJECT : | 4-INCH OD TURBO OUTLET PIPE – CLEARANCE WITH CLOSE SUPPORT BRACKET | | |

APPLICATION

| Model | VIN |  |
|---|--|--|
| X3-45 Coaches Model Year : 2011 - 2013 | From PCG33491BC73 5002 up to 2PCG3349XDC73 5387 incl. | |
| XLII Shells Model Year : 2011- 2013 | From 2PCY33498BC73 5003 up to 2PCYS3499DC73 5372 incl. | |
| X3-45 VIP Shells Model Year : 2012- 2013 | From 2PCBS3499CC73 5070 up to 2PCBS3493DC73 5373 incl. | |

DESCRIPTION

When performing the next periodic maintenance, check clearance between the 4-inch OD turbo outlet pipe (**Prevost part number 052953**) and a close support bracket. If evidence of rubbing is found, i.e. scratched paint on the 4-inch OD turbo outlet pipe, a modification of the support bracket can be performed in order to increase the clearance between the involved components. The support bracket will remain strong enough for the duty even after being modified.


PROCEDURE



DANGER

Park vehicle safely, apply parking brake, stop engine and set battery master switch(es) to the OFF position prior to working on the vehicle.


1) Check the image below to identify involved parts and location.

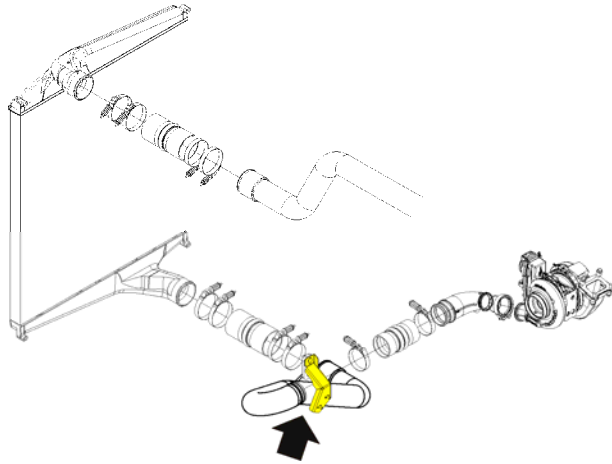

2) The picture below shows the area where interference between the 4-inch OD turbo outlet pipe and the close support bracket may be present.




3) With the engine shut down, the minimum gap should be about 19/32 inch (15 mm).

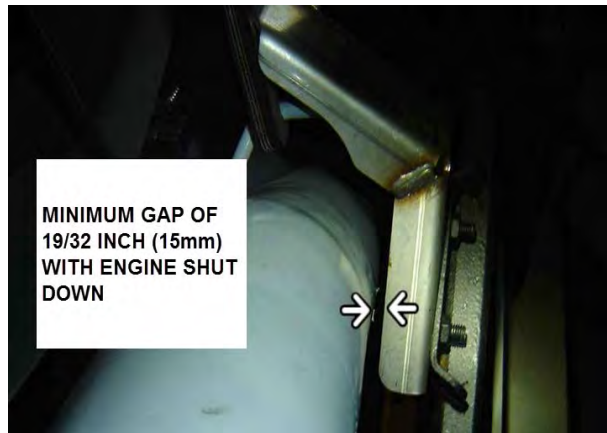

4) If evidence of rubbing is found, remove the support bracket and cut a part of the support bracket out as shown (as per image at left or at right as needed) and trim sharp edges.

**BLUE FLEXIBLE HOSE CLAMP TORQUE:
60 lbf-in (5 lbf-ft)**

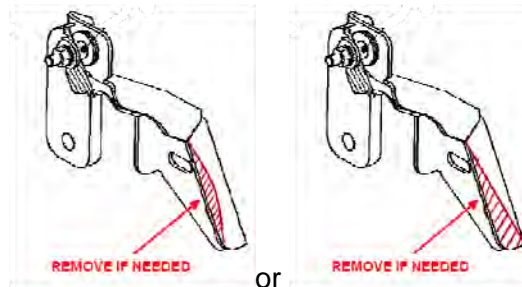

Waste disposal:

Discard according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

Access all our Service Bulletins on
<http://prevostparts.volvo.com/technicalpublicatios/en/pub.asp>
Or scan the QR-Code with your smart phone.

E-mail us at technicalpublications_prev@volvo.com and type "ADD" in the subject to receive our warranty bulletins by e-mail.

