



File in Section: -

Bulletin No.: PIC5761

Date: October, 2012

Service Bulletin

PRELIMINARY INFORMATION

Subject: Glove Compartment Light On Unwanted

Models: 2013 Chevrolet Malibu

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

Condition/Concern

A customer or technician may comment the glove compartment light remains on with compartment closed or may notice it flickers off and on while driving.


Recommendation/Instructions

Open glove compartment, disconnect the compartment damper, and apply inward pressure on either side of compartment in rear to disengage compartment stops. Now the compartment can be lowered and the harness for the light can now be disconnected to lower the compartment completely to access rear of compartment. You should see a witness mark where the compartment light pin switch contacts the back of the glove compartment. Apply a 1/8 to 1/4 inch thick patch to this location and reassemble glove compartment. Verify the compartment and light now function properly.





2920527

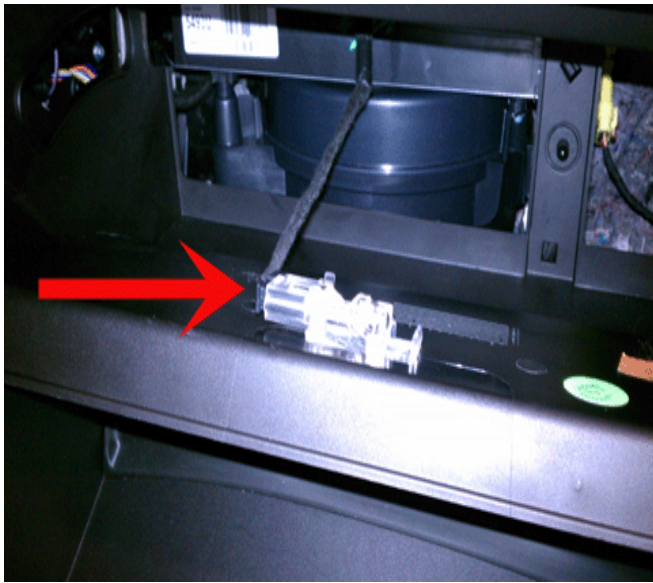

2920525



2920524

Warranty Information

For vehicles repaired under warranty use:

Labor Operation	Description	Labor Time
C9528	Repair to Correct Glove Compartment Light Concern	0.2 hr

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.