



# Service Bulletin

File in Section: -

Bulletin No.: PIP5052A

Date: September, 2012

## PRELIMINARY INFORMATION

**Subject:** Flutter Noise At High RPM Driving And On Deceleration At Highway Speed - Inspect Transmission Tag

**Models:** 2012 - 2013 Chevrolet Camaro ZL1  
With 6.2L Supercharged Engine (RPO LSA)

This PI was superseded to update warranty information. Please discard PIP5052.

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.


### Condition/Concern:


Some customers may complain of an engine or supercharger noise during a high RPM deceleration from highway speed.

**Important:** Do not replace the supercharger for this concern.

### Recommendation/Instructions:

Inspect the transmission ID tag to determine if it is making contact with the transmission tunnel as shown below and reposition the tag as necessary.

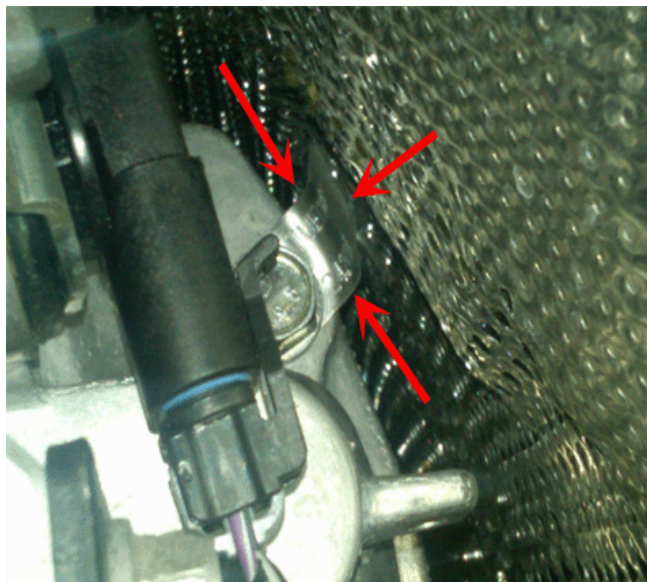

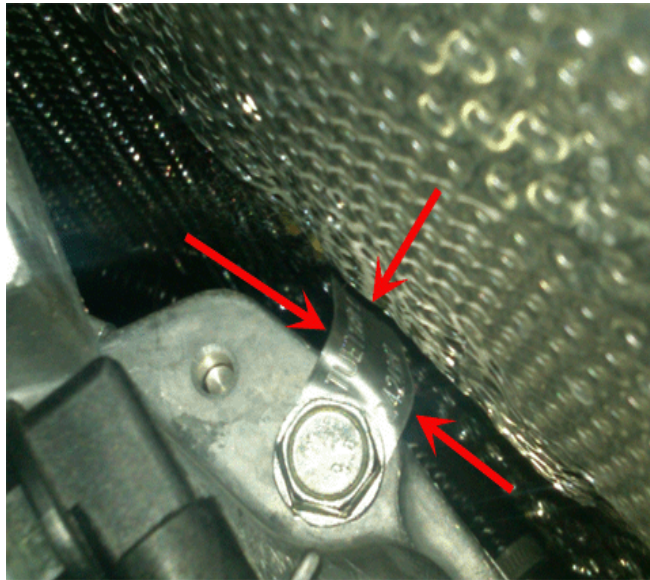

2895162

### Warranty Information:

For vehicles repaired under warranty use:

Labor Operation	Description	Labor Time
K9713	Inspect/Reposition Transmission ID Tag to Correct Noise Concern	.3 hr

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.