



# Service Bulletin

## PRELIMINARY INFORMATION

**Subject:** SES Lamp P0011 Setting After Camshaft Replacement

**Models:** 2010-2014 Cadillac Escalade  
2010-2014 Chevrolet Camaro  
2010-2014 GMC Yukon Denali  
With engine RPO 6.2L L94 L99


The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

### Condition/Concern

You may encounter a P0011 setting after the replacement of the camshaft.

### Recommendation/Instructions

Inspect the camshaft to determine if the correct Part number has been installed. The inspection consists of verifying the last 4 digits on the camshaft (stamped on the end) match the part number listed on the box.

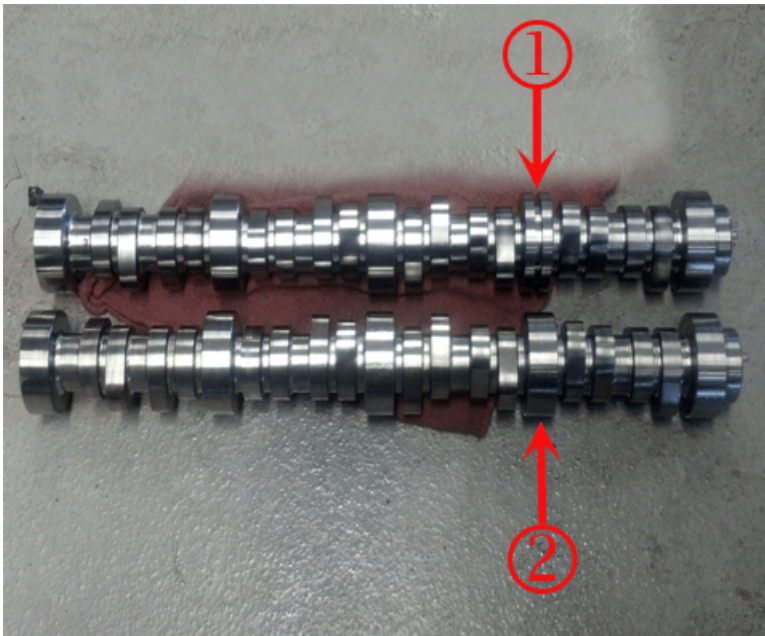

- 1. Shows a good camshaft
- 2. Shows the wrong camshaft

### Warranty Information

For vehicles repaired under warranty use:

Labor Operation	Description	Labor Time
-----------------	-------------	------------

J0850	Camshaft Replacement	Use Published Labor Operation Time
-------	----------------------	------------------------------------

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.

---

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION