



**Countries:**  
**Availability:**  
**Major System:** BUS BODY  
**Current Language:** English  
**Other Languages:** NONE  
**Viewed:** 49

**Document ID:** IK2200127  
**Revision:** 0  
**Created:** 10/11/2013  
**Last Modified:** 10/17/2013  
**Author:** Bob Ford

[Less Info](#)

Hide Details

Coding Information


<b>Copy Link</b> 	<b>Copy Relative Link</b> 	<b>Bookmark</b>  <a href="#">View My Bookmarks</a>	<b>Add to Favorites</b> 	<b>Print</b> 	<b>Provide Feedback</b> 	<b>Helpful</b>  0	<b>Not Helpful</b>  0
----------------------	-------------------------------	--	-----------------------------	------------------	-----------------------------	-------------------------	-----------------------------

**Title: BE and CE Model Electrical Panel Decal**

**Applies To: BE and CE Bus Models Build Start Date: April 2, 2012 Build End Date: Sept 16, 2013**

**DESCRIPTION**

BE and CE electrical panel decal incorrectly states the driver heater fuse/breaker value. The decal lists the driver heater fuse, F1, value at 20A. Units are correctly produced with a 25A fuse/breaker.

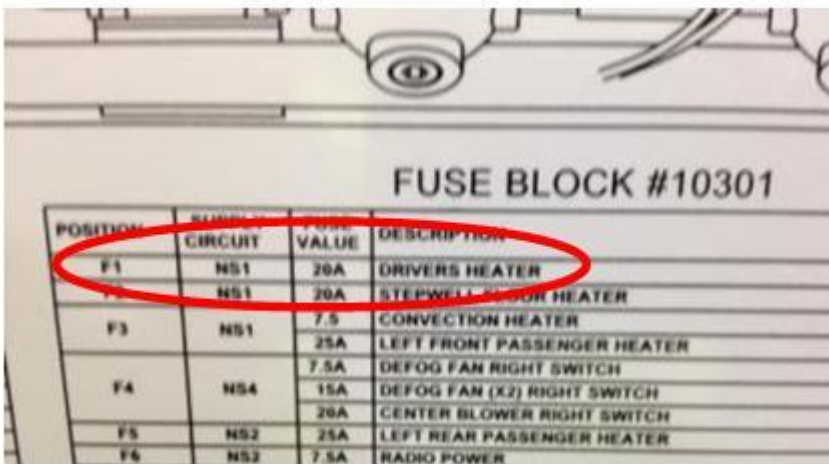

**SYMPTOMS**

Use of a 20A fuse/breaker can result in intermittent tripping of the fuse/breaker.

**REPAIR PROCEDURE**

No action is required at this time to replace the decal.

If the driver heater circuit is suspect and the fuse / circuit breaker is rated at 25A follow normal circuit troubleshooting procedures.

-  
-

Hide Details

Feedback Information

Viewed: 48  
 Helpful: 0  
 Not Helpful: 0

No Feedback Found

Copyright © 2013 Navistar, Inc.