



Countries:	CANADA, UNITED STATES, PUERTO RICO	Document ID:	IK0900014
Availability:	ISIS	Revision:	3
Major System:	COOLING	Created:	12/17/2007
Current Language:	English	Last Modified:	12/13/2013
Other Languages:	Français , Español ,	Author:	Thomas Hoffmeister
Viewed:	313		

[Less Info](#)
[Hide Details](#)

Coding Information

Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks				 41	 93

Title: Front Spring Bolt Hitting Coolant Pipe on DuraStar and WorkStar Models built with feature 12WYK


Applies To: Post-2007 4000 and 7000 (WorkStar and DuraStar) models built with feature 12 WYK

DESCRIPTION

The spring bolt hits the coolant pipe for the auxilliary cooler on trucks built with feature 12WYK. This was fixed in production on 5/22/07.

SYMPTOMS

- Hole rubbed into coolant pipe
- Coolant leak

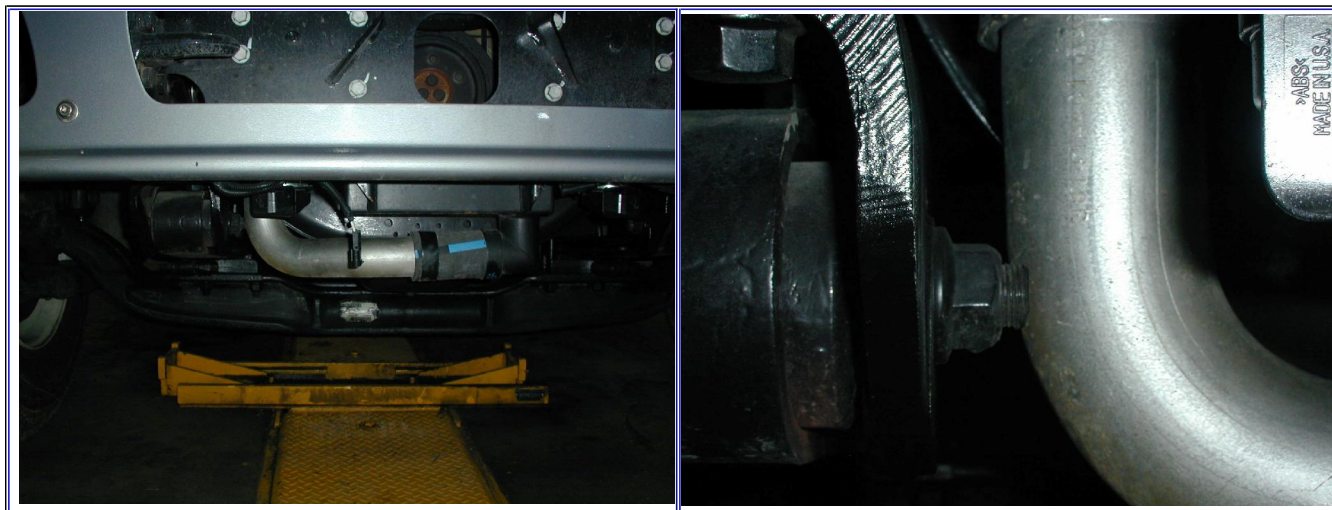

RESOLUTION

Reverse the spring bolt so that the nut end is on the other side (curb side) and cut a half inch off of the bottom rubber hose so that the pipe will be further from the spring hanger.

[Hide Details](#)

Feedback Information

Viewed: 312
Helpful: 41
Not Helpful: 93

No Feedback Found

Copyright © 2014 Navistar, Inc.