

Service Bulletin

PRELIMINARY INFORMATION

Subject: Malfunction Indicator Lamp (MIL) On, Service StabiliTrak, Power Steering or Vehicle Soon Message Displayed on DIC


Models: 2012-2013 Chevrolet Equinox 2012-2013 GMC Terrain Equipped with 2.4L Engine (RPO LEA)

Condition/Concern

Some customers may comment on any one of the following conditions:

- Intermittent malfunction indicator lamp on
- Service StabiliTrak message displayed on DIC
- Service Power Steering message displayed on DIC
- Service Vehicle Soon message displayed on DIC

When checking the vehicle for DTCs, the BCM, EBCM, ECM or TCM may be report high speed communication codes U0073, U0100, U0101, U0121 or U0140 set as current or in history.

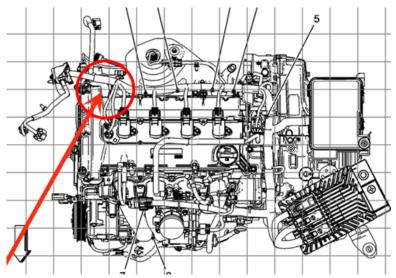



These conditions may be caused by one of the wires (in particular circuits 2500 and 2501) in the engine wiring harness being chafed, cut or damaged due to contact with the right rear corner of the engine or cam/valve cover.

Recommendation/Instructions

Repair the affected wire. Inspect other wires in the bundle for chafes and repair if needed. Wrap the harness with additional protective tape and route the harness away from the suspect areas of engine component contact to prevent the wiring from chafing through again.

Warranty Information

For vehicles repaired under warranty, use:

Labor Operation	Description	Labor Time
5430902	Wire-to-Wire Repair	Use Published Labor Operation Time

Additional Keywords: no start, no crank, Reduced engine power, P0641, P2230, P0097, P0102, P0113, P057C, P2227, P11C2, P2228, SES

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools,

safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION