



Countries:
Availability:
Major System: ELECTRICAL SYSTEM
Current Language: English
Other Languages: NONE
Viewed: 36

Document ID: IK0800442
Revision: 0
Created: 7/11/2013
Last Modified: 8/22/2013
Author: Gregory Mackey

[Less Info](#)

Hide Details

Coding Information

Copy Link 	Copy Relative Link 	Bookmark View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful 1	Not Helpful 0
---------------	------------------------	---	----------------------	-----------	----------------------	------------------	----------------------

Title: Auxiliary Battery Box - Cover Difficult to Remove**Applies To: Prostar or any vehicle with Feature Code 0008XGG (auxiliary battery box)****DESCRIPTION**

An interference condition can occur between cover bolts or step plate and a flange on the back plate of the battery box. This document describes the condition and remedy of replacing the existing bolt with a shorter bolt to eliminate the interference condition.

TOOLS REQUIRED


Tools
No special tools are required

PARTS INFORMATION

Part #	Description	Qty.
3588153C1	Bolt - M8 x 30	2

REPAIR PROCEDURE

Replace 2 - 3804756c1 M8x35mm bolts indicated as item 13 in Figure 1 w/ 2 - 3588153c1 M8x30 bolts.



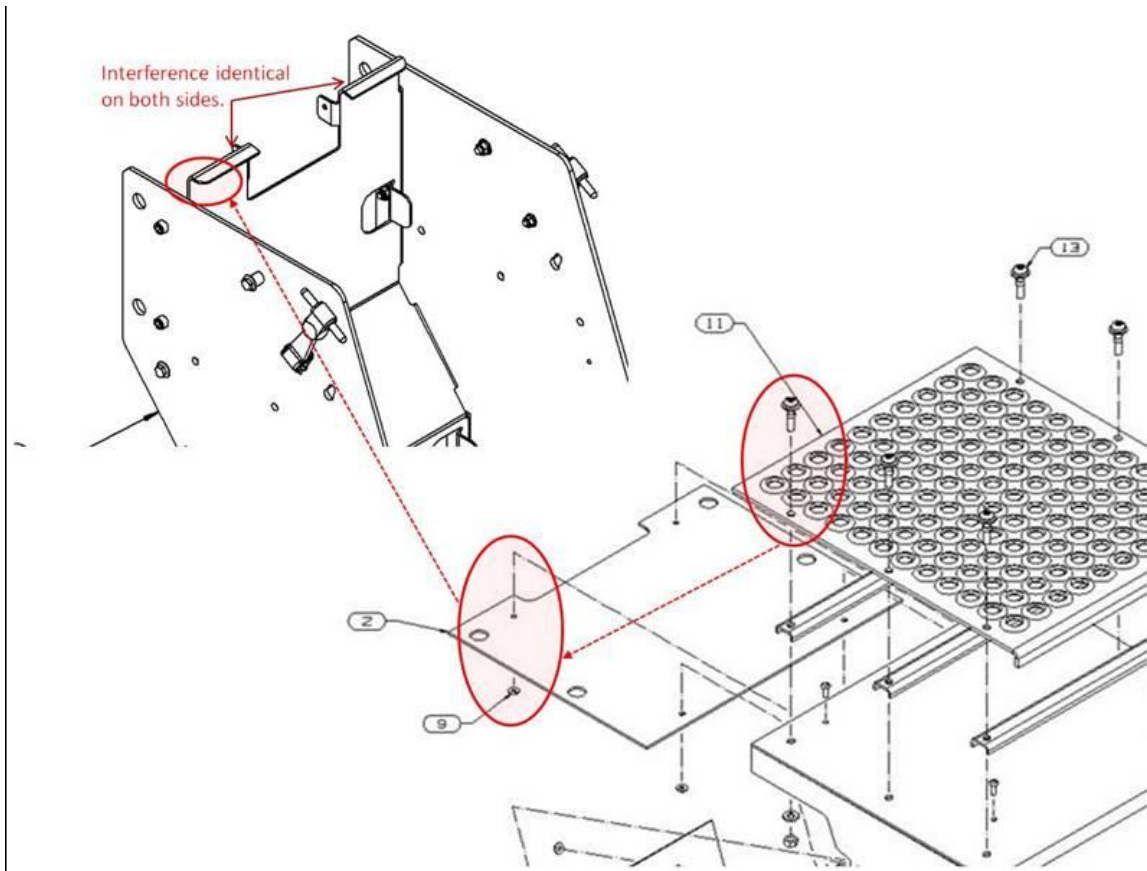


Figure 1 - Replace bolts causing the interference

Hide Details

Feedback Information

Viewed: 35
Helpful: 1
Not Helpful: 0

No Feedback Found