

SB-10052017-4197

Countries: CANADA, UNITED STATES, MEXICO **Document ID:** IK1300134
Availability: ISIS, FleetISIS **Revision:** 1
Major System: TRANSMISSION **Created:** 3/14/2013
Current Language: English **Last Modified:** 3/22/2013
Other Languages: NONE **Author:** Matthew Boyer
Viewed: 82

[Less Info](#)
[Hide Details](#)

Coding Information

Copy Link 	Copy Relative Link 	Bookmark View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful 1	Not Helpful 1
---------------	------------------------	---	----------------------	-----------	----------------------	------------------	----------------------

Title: TerraStar Transmission Shift Cable Routing

Applies To: Terrastar Trucks
DESCRIPTION


On 2010 through 2012 model year TerraStars, the shift cable may be routed incorrectly causing damage to the shift cable. This can cause difficulty selecting the desired transmission range, or if not resolved quickly, damage to the column gear shift assembly.

IDENTIFICATION


Applies to vehicles built with shift cable part number 2605843C1 and/or column shifter part number 2592668C91(0013WCP).

ROUTING INFORMATION

Incorrect Routing - Transmission shift cable is routed to the inside of the transmission fill tube.

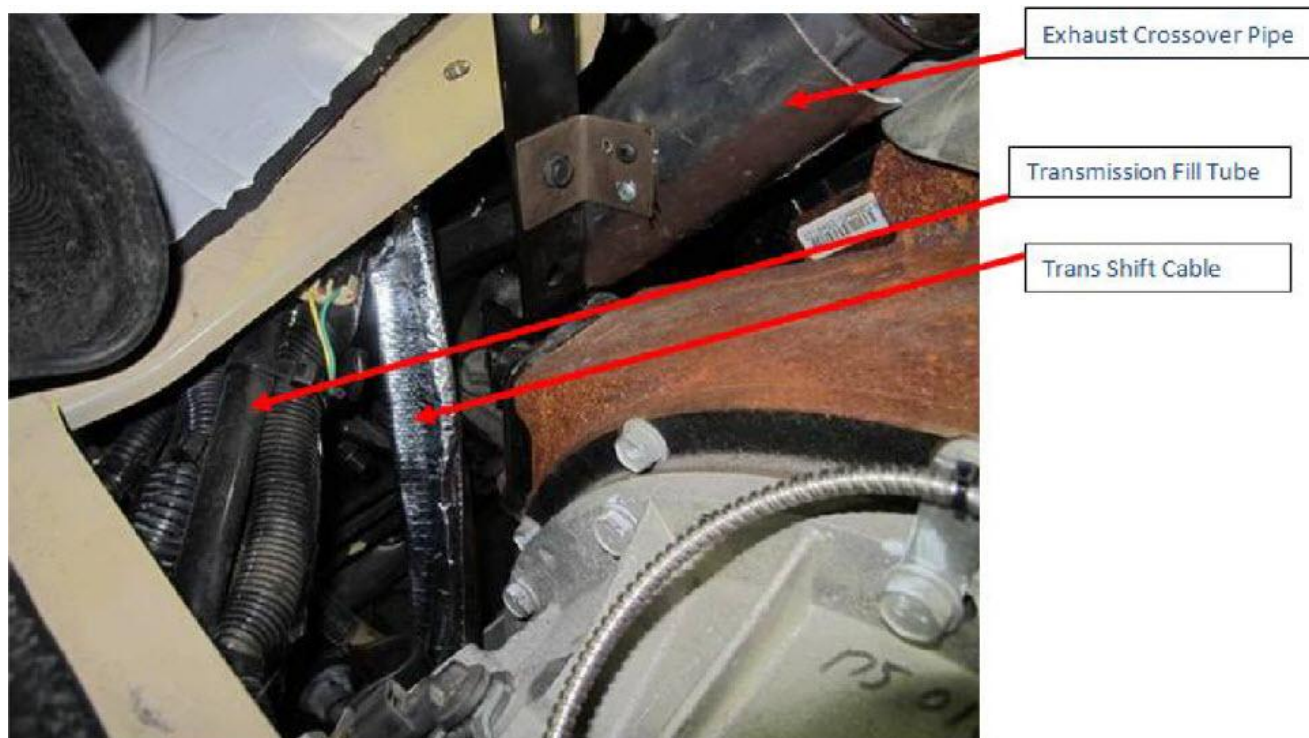

Correct Routing - Transmission shift cable is routed to the outside of the transmission fill tube.

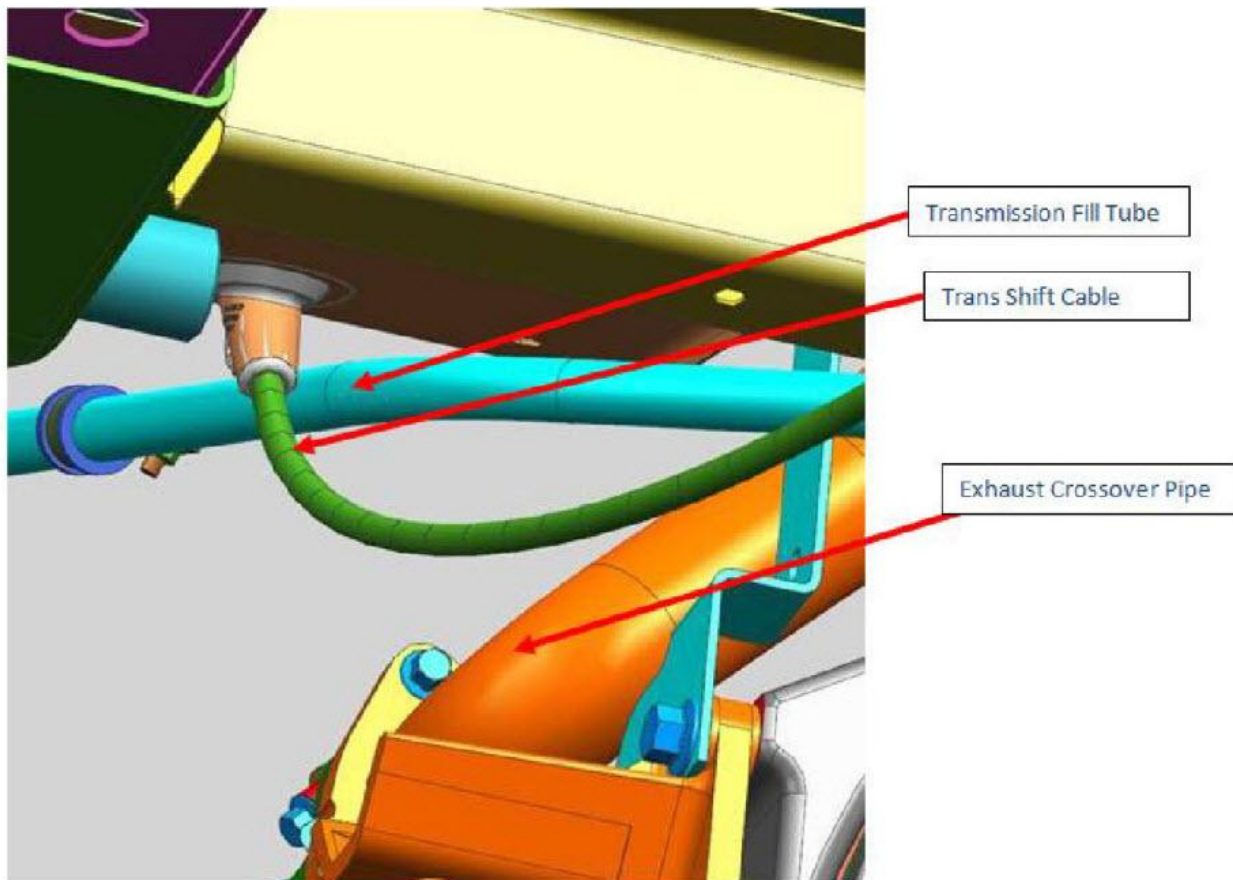[Hide Details](#)

Feedback Information

Viewed: 81
Helpful: 1
Not Helpful: 1

No Feedback Found