 HYUNDAI NEW THINKING. NEW POSSIBILITIES.	GROUP	NUMBER
	CAMPAIGN	13-01-032
	DATE	MODEL
	JULY 2013	SANTA FE (NC)
SUBJECT BLOWER PWM MODULE REPLACEMENT (SERVICE CAMPAIGN TP9)		

Description: This bulletin provides the procedure to replace the blower PWM module for Santa Fe (NC) vehicles equipped with the Dual Automatic Temperature Control A/C system.

*** IMPORTANT**

***** Dealer Stock and Retail Vehicles *****

Dealers must perform this Service Campaign on all affected vehicles prior to customer retail delivery and whenever an affected vehicle is in the shop for any maintenance or repair.

When a vehicle arrives at the Service Department, access Hyundai Motor America's "Warranty Vehicle Information" screen via WEBDCS to identify open Campaigns.

Applicable Vehicles:

2013 MY Santa Fe (NC) vehicles equipped with Dual Automatic Temperature Control A/C system

- Produced from January 14, 2013 to May 27, 2013

Parts Information:

Part Name	Part Number		New Part Identification
	Previous	New	
BLOWER PWM MODULE			New part has a yellow colored label.
	97235-4RAA0	97235-4RAA0QQH	



Warranty Information:

Op Code	Operation	Op Time
30C029R1	BLOWER PWM MODULE REPLACEMENT	0.3 M/H

NOTE: Submit claim on Campaign Claim Entry Screen

SERVICE PROCEDURE

1. Remove the mounting screws (A), and then remove the crash pad under cover (B).

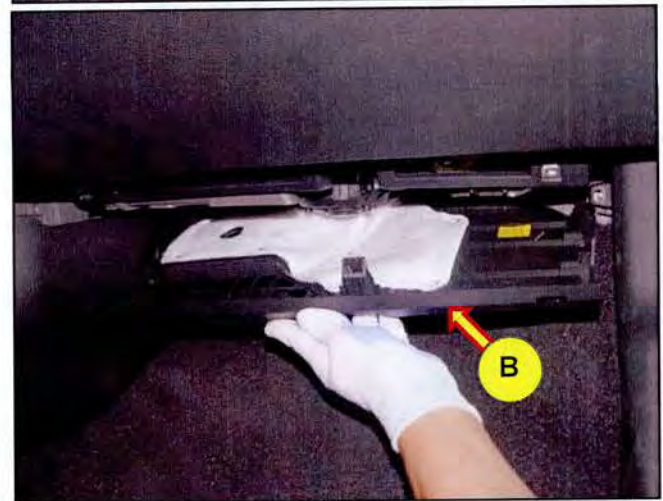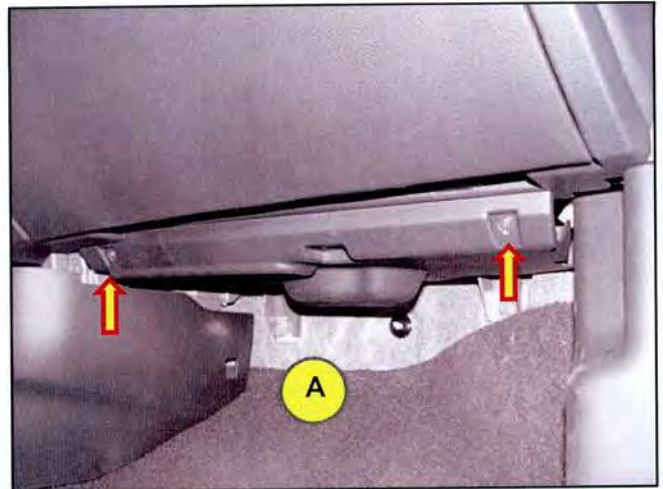

2. Disconnect the blower PWM module connectors (C).



SUBJECT:**BLOWER PWM MODULE REPLACEMENT (SERVICE CAMPAIGN TP9)**

3. Remove the mounting screws (D), and then remove the blower PWM module (E).



4. Install the new blower PWM module (yellow colored label part as shown in page 1) in the reverse order of removal.
5. Operate the A/C blower to verify proper system operation.

