



Technical Bulletin

NISSAN NORTH AMERICA, INC.
Copyright ©

SERVICE BULLETIN

Classification:	Reference:	Date:
EC13-013	NTB13-102	November 20, 2013

2012-2013 NV; MIL "ON" WITH DTC P0448

APPLIED VEHICLE: 2012 – 2013 NV1500/2500/3500 (F80)
APPLIED VIN AND DATE Built before 1N6(*)F0LY(*)DN 111046 and Sept 10, 2013
 Built before 5BZ(*)F0AA(*)DN 202182 and Sept 10, 2013

IF YOU CONFIRM


- The MIL is on with a current or past DTC of P0448 (Evap Canister Vent Control Valve) set.

ACTION

- Replace the Tube Assy-Filler (shown in Figure 1) with the Tube Assy-Filler (Figure 2) from the Parts Information on the next page.

NOTE:

- Refer to the appropriate section of the Electronic Service Manual (ESM) when replacing the Tube Assy-Filler.
- Confirm that DTC's have been cleared before returning to customer.

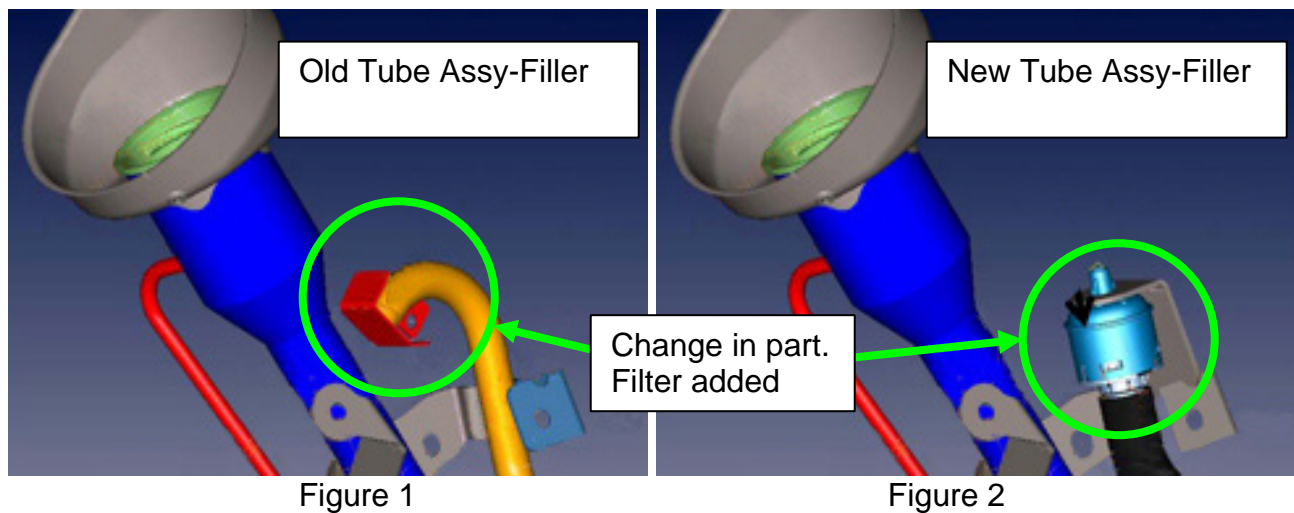

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

PARTS INFORMATION

DESCRIPTION	PART #	QUANTITY
Tube Assy-Filler	17221-1PA0C	1

CLAIMS INFORMATION

Submit a Primary Part (PFP) type line claim using the following claims coding:

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Replace Tube Assy-Filler	(1)	FB30AA	HC	32	(2)

- (1) Use the Fuel Filler Tube Assembly part number in the Part Information as the Primary Part (PFP)
- (2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated flat rate time.

