


SB-10055370-8753

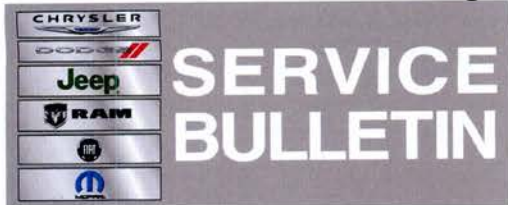

NUMBER: 08-068-13

GROUP: Electrical

DATE: September 05, 2013

This bulletin is supplied as technical information only and is not an authorization for repair. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without written permission of Chrysler Group LLC.

THIS SERVICE BULLETIN IS ALSO BEING RELEASED AS RAPID RESPONSE TRANSMITTAL (RRT) 13-064. ALL APPLICABLE SOLD AND UN-SOLD RRT VIN'S HAVE BEEN LOADED. TO VERIFY THAT THIS RRT SERVICE ACTION IS APPLICABLE TO THE VEHICLE, USE VIP OR PERFORM A VIN SEARCH IN TECHCONNECT. ALL REPAIRS ARE REIMBURSABLE WITHIN THE PROVISIONS OF WARRANTY.

THE wiTECH SOFTWARE LEVEL MUST BE AT RELEASE 14.01 OR HIGHER TO PERFORM THIS PROCEDURE.

SUBJECT:

No Audible Indication, The Right Front Seat Belt Reminder Is Not Functioning

OVERVIEW:

This Bulletin involves reconfiguring the vehicle for proper operation.

MODELS:

2013-2014 (DS) Ram 1500 Pickup

NOTE: This bulletin applies to vehicles built on or after June 10, 2013 (MDH 0610XX) on or before July 05, 2013 (MDH 0705XX) equipped with Front Passenger Seat Belt Alert (sales code LAX).

SYMPTOM/CONDITION:

The customer may experience that there is no audible sound indicating that the right front seat belt reminder is functioning.

DIAGNOSIS:

Using a Scan Tool (wiTECH™) with the appropriate Diagnostic Procedures available in TechCONNECT, verify no DTC's are set. If DTC's are present record them on the repair order and repair as necessary before proceeding further with this bulletin.

If a customer's VIN is listed in VIP or your RRT VIN list, perform the repair. For all other customers that describe the symptom/condition, perform the Repair Procedure.

REPAIR PROCEDURE:

1. Using wiTECH, reconfigure the vehicle. This routine is available under the 'Diagnostic Procedures' tab found on the home, 'Vehicle View', page of wiTECH.
2. Using wiTECH clear any DTCs which may have been set during the reconfiguration.

POLICY:

Reimbursable within the provisions of the warranty.

TIME ALLOWANCE:

Labor Operation No:	Description	Amount
18-19-02-9U	Module, Body Control (BCM) Reconfigure Vehicle - Powernet. (1 - Semi-Skilled)	0.2 Hrs.

FAILURE CODE:

ZZ	Service Action
----	----------------