



NUMBER: 09-003-13

GROUP: Engine

DATE: October 26, 2013

This bulletin is supplied as technical information only and is not an authorization for repair. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without written permission of Chrysler Group LLC.

SUBJECT:

Pentastar Engine Oil Filter Application Reference

OVERVIEW:

This bulletin discusses a change made to the 3.6L engine oil filter adapter for 2014 Model Year vehicles.

MODELS:

2011 - 2014	(RT)	Town & Country/Grand Caravan
2011 - 2014	(JS)	200/Avenger
2011 - 2014	(JC)	Journey
2011 - 2014	(LC)	Challenger
2011 - 2014	(LX)	300
2011 - 2014	(LD)	Charger
2011 - 2014	(WK)	Grand Cherokee
2011 - 2014	(WD)	Durango
2012 - 2014	(JK)	Wrangler
2013 - 2014	(DS)	Ram 1500

NOTE: This bulletin applies to vehicles equipped with a 3.6L engine (sales code ERB).

DISCUSSION:

A change was made to the engine Oil Filter Adapter (OFA) for 2014 Model Year vehicles that also drove a change in the oil filter element. It is important to note that the two different designs are **not interchangeable**. Please reference the chart below for proper application.

NOTE: Failure to install the correct oil filter **WILL** result in permanent engine damage.

NOTE: When replacing the filter, use only the o-ring included in the filter package. Failure to do so **WILL** result in leakage and possible OFA damage.

Model Year Application	Filter Part Number
2014 and Later	68191349AA
2011 - 2013	68079744AC

The picture below demonstrates the physical differences between the two filter elements.

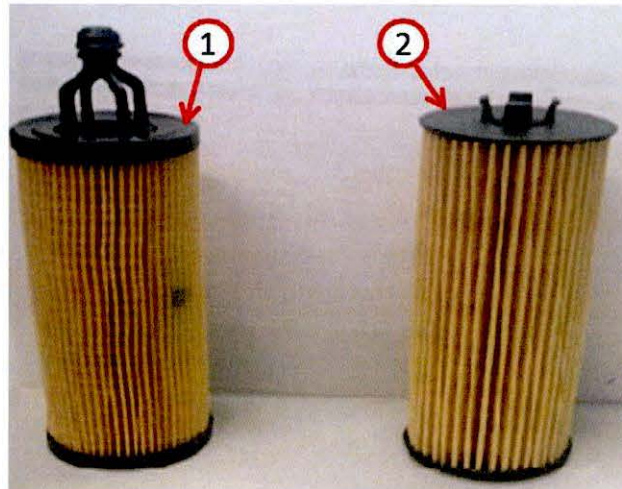


Fig. 1 Filter Comparison

1 - 2014 Model Year and Later (p/n 68191349AA)

2 - 2013 Model Year and Prior (p/n 68079744AC)

POLICY:
Information Only