



Service Bulletin

File in Section: -

Bulletin No.: PIP5115

Date: April, 2013

PRELIMINARY INFORMATION

Subject: SES Lamp P0011 Setting After Camshaft Replacement

Models: 2010-2014 Cadillac Escalade
2010-2014 Chevrolet Camaro
2010-2014 GMC Yukon Denali
With engine RPO 6.2L L94 L99


The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

Condition/Concern

You may encounter a P0011 setting after the replacement of the camshaft.

Recommendation/Instructions

Inspect the camshaft to determine if the correct Part number has been installed. The inspection consists of verifying the last 4 digits on the camshaft (stamped on the end) match the part number listed on the box.

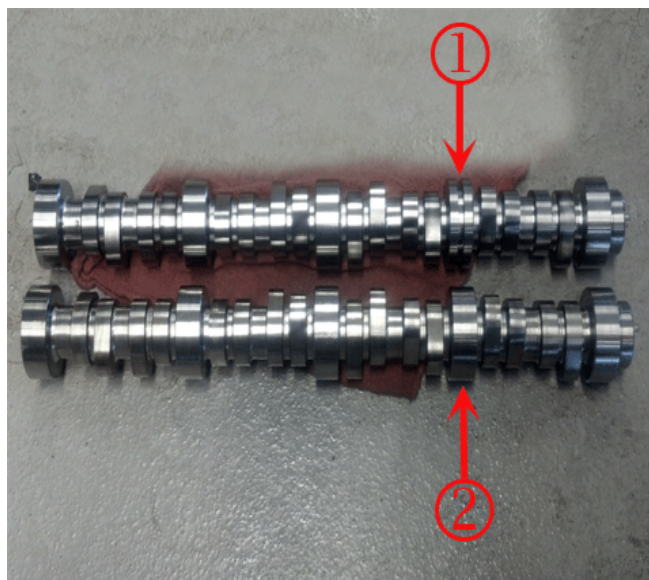

1. Shows a good camshaft
2. Shows the wrong camshaft

Warranty Information

For vehicles repaired under warranty use:

Labor Operation	Description	Labor Time
J0850	Camshaft Replacement	Use Published Labor Operation Time

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.

3407854