



Countries:
Availability:
Major System: ELECTRICAL SYSTEM
Current Language: English
Other Languages: NONE
Viewed: 67

Document ID: IK0800442
Revision: 1
Created: 7/11/2013
Last Modified: 3/10/2014
Author: Patrick Gotschall

[Less Info](#)

Hide Details

Coding Information

Copy Link 	Copy Relative Link 	Bookmark View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful 1	Not Helpful 0
----------------------	-------------------------------	--	-----------------------------	------------------	-----------------------------	-------------------------	-----------------------------

Title: Auxiliary Battery Box - Cover Difficult to Remove

Applies To: Prostar or any vehicle with Feature Code 0008XGG (auxiliary battery box)

DESCRIPTION

An interference condition can occur between cover bolts or step plate and a flange on the back plate of the battery box. This document describes the condition and remedy of replacing the existing bolt with a shorter bolt to eliminate the interference condition.

TOOLS REQUIRED


Tools
No special tools are required

PARTS INFORMATION

Part #	Description	Qty.
3588153C1	Bolt - M8 x 30	2

REPAIR PROCEDURE

Replace 2 - 3804756c1 M8x35mm bolts indicated as item 13 in Figure 1 w/ 2 - 3588153c1 M8x30 bolts.



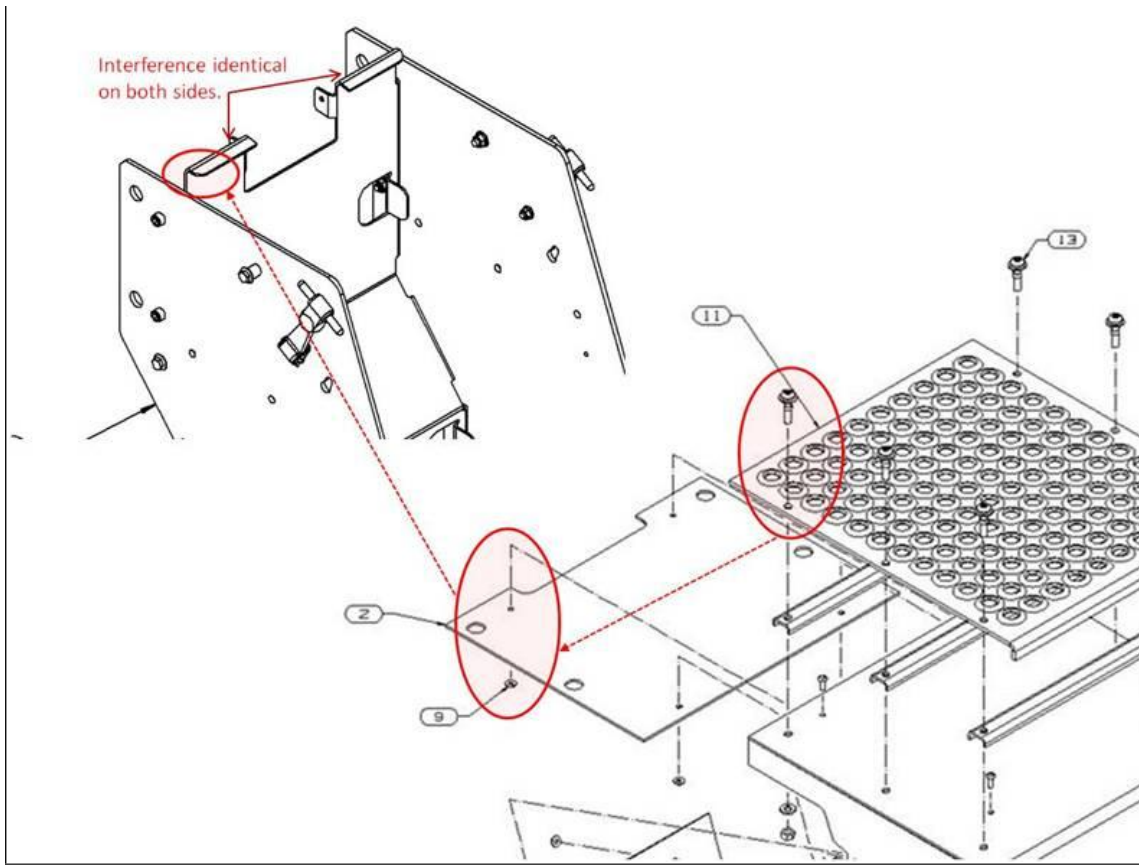


Figure 1 - Replace bolts causing the interference

Hide Details

Feedback Information

Viewed: 66
Helpful: 1
Not Helpful: 0

No Feedback Found