



<b>Countries:</b>	CANADA, UNITED STATES, PUERTO RICO	<b>Document ID:</b>	IK1600018
<b>Availability:</b>	ISIS	<b>Revision:</b>	3
<b>Major System:</b>	CAB / SLEEPER / HOOD	<b>Created:</b>	4/20/2007
<b>Current Language:</b>	English	<b>Last Modified:</b>	3/12/2014
<b>Other Languages:</b>	<a href="#">Français</a> , <a href="#">Español</a> ,	<b>Author:</b>	Patrick Gotschall
<b>Viewed:</b>	311		

[Less Info](#)

Hide Details

Coding Information

<b>Copy Link</b> 	<b>Copy Relative Link</b> 	<b>Bookmark</b>  <a href="#">View My Bookmarks</a>	<b>Add to Favorites</b> 	<b>Print</b> 	<b>Provide Feedback</b> 	<b>Helpful</b>  86	<b>Not Helpful</b>  89
----------------------	-------------------------------	--	-----------------------------	------------------	-----------------------------	--------------------------	------------------------------

**Title: Door Hinge Hard to Open on 5000's and 9000's**

**Applies To: All 5000 models built prior to 6/2/06, 9000 models (CAP) built prior to 5/24/06 and (EAP) built prior to 6/19/06**

**DESCRIPTION**


The presence of brass bushings accelerated corrosion within the hinges.

To correct this, replace the old part with the new one listed below:

- 3513636C4 Hinge, Door SD W/Nylon Bushing
- 3803792C1 Strap, Door Hinge Ground

**NOTE:**

**Brass bushings in prior design provided conductivity for grounding of the CB antenna. The ground strap provides this functionality with the elimination of the brass bushings.**

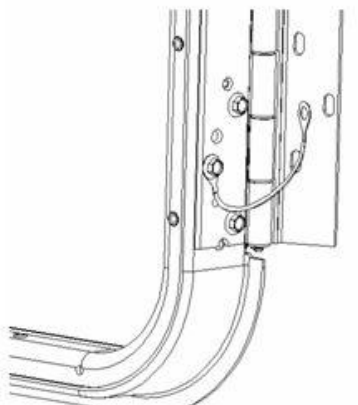

Replace hinge with new part number, ensuring that the ground strap is installed as shown.

Hide Details

Feedback Information

Viewed: 310  
Helpful: 86

Not Helpful: 89

No Feedback Found

Copyright © 2014 Navistar, Inc.