



# Service Bulletin

File in Section: 00 - General Information


Bulletin No.: 14-00-89-002

Date: February, 2014

## INFORMATION

**Subject:** Important Fuse Replacement Requirement

**Models:** 2014 Cadillac XTS Professional Vehicles

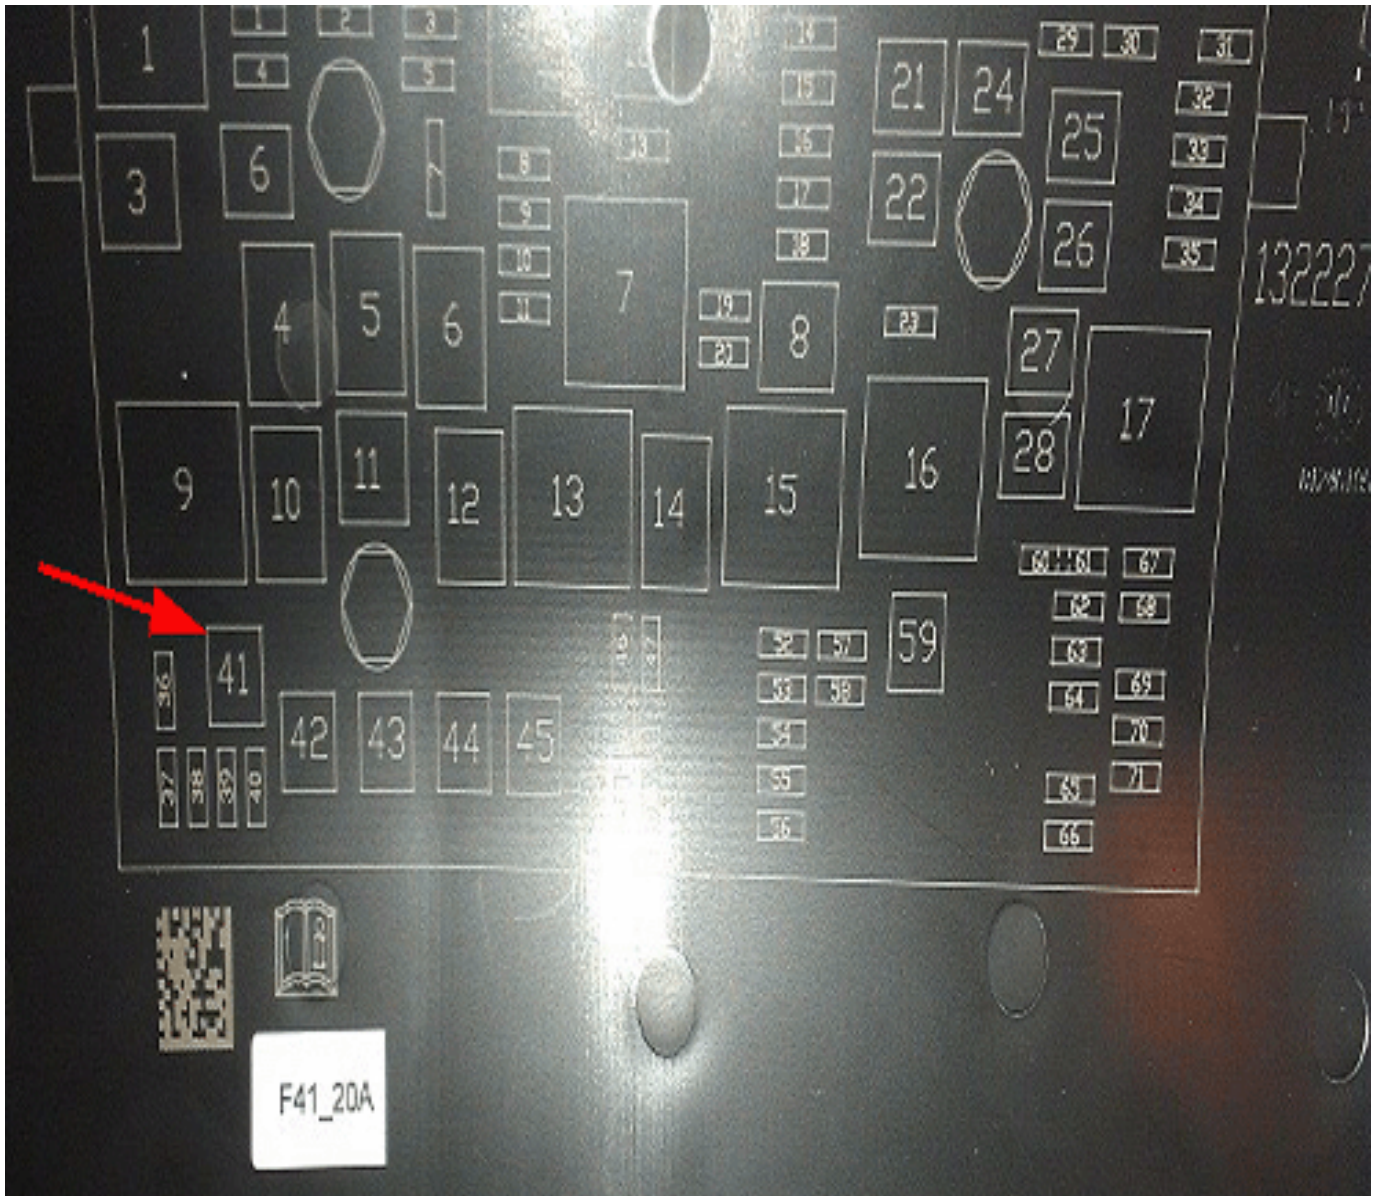

3717175

Current XTS professional vehicles share a number of components with the base XTS chassis. Based on some current production changes, the base XTS will now have a 20 amp fuse placed in cavity 41 in the front fuse block, as shown in the illustration above.

Cadillac Master Coachbuilders will need to remove the 20 amp fuse and replace it with a 25 amp fuse to ensure proper load capabilities for the professional vehicle. You will also need to remove the added 20 amp fuse label shown in the photo. This fuse change will be required until further notice and is required on all Professional Vehicles.

