



SERVICE BULLETIN

Classification: EC13-013a	Reference: NTB13-102a	Date: October 23, 2014
------------------------------	--------------------------	---------------------------

2012-2013 NV; MIL ON WITH DTC P0448

This bulletin has been amended to include a procedure to replace the vent tube filter, and provide a part number and claims information. Please discard the previous version

APPLIED VEHICLE: 2012 – 2013 NV1500/2500/3500 (F80)
APPLIED VIN AND DATE Built before 1N6(*)F0LY(*)DN 111046 and Sept 10, 2013
 Built before 5BZ(*)F0AA(*)DN 202182 and Sept 10, 2013

IF YOU CONFIRM

- The MIL is on with a current or past DTC of P0448 (Evap Canister Vent Control Valve) set.

ACTION

Confirm that the Tube Assy-Filler is the updated part as shown in Figure 2.

- If the Tube Assy-Filler is the old style as shown in Figure 1, replace it with the Tube Assy-Filler (Figure 2) from the Parts Information on the next page.
- If the Tube Assy-Filler is the new style as show in Figure 2, replace only the “Vent Filter” also shown in Figure 2 with the procedure on page 2.

NOTE:

- Refer to the appropriate section of the Electronic Service Manual (ESM) when replacing the Tube Assy-Filler.
- Confirm that DTC’s have been cleared before returning to customer.

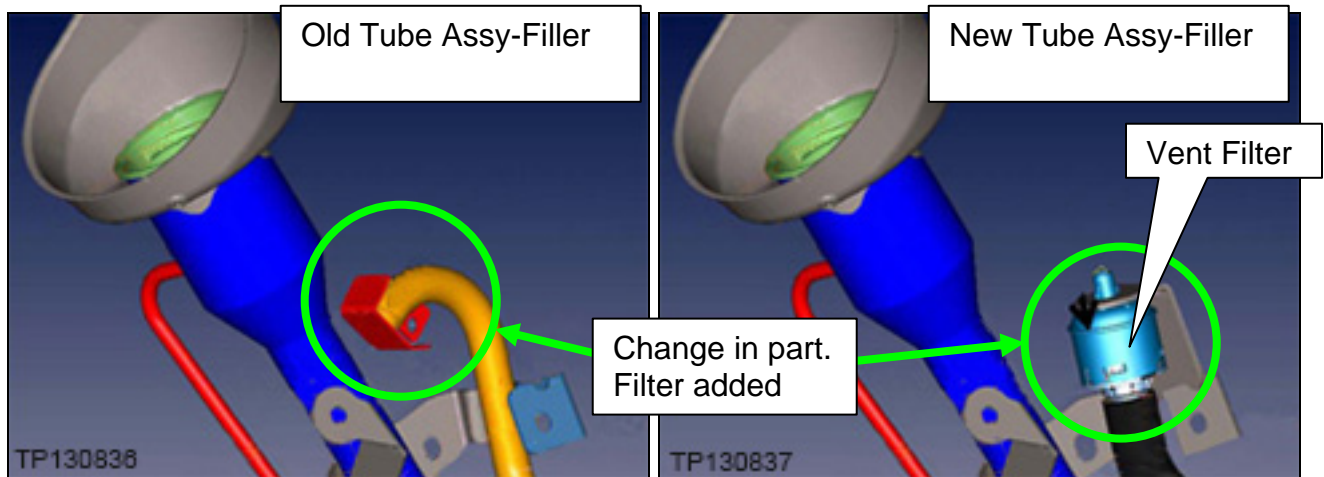


Figure 1

Figure 2

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

SERVICE PROCEDURE
(For replacing vent filter only)

1. Remove the 4 bolts that attach the guard plate and then remove it.

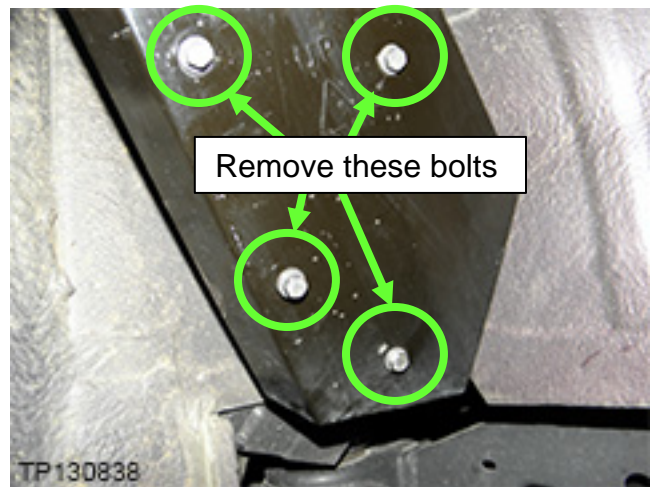


Figure 1

2. Remove the filter from the bracket:
 - a. Depress the two tabs.
 - b. And then push through bracket.


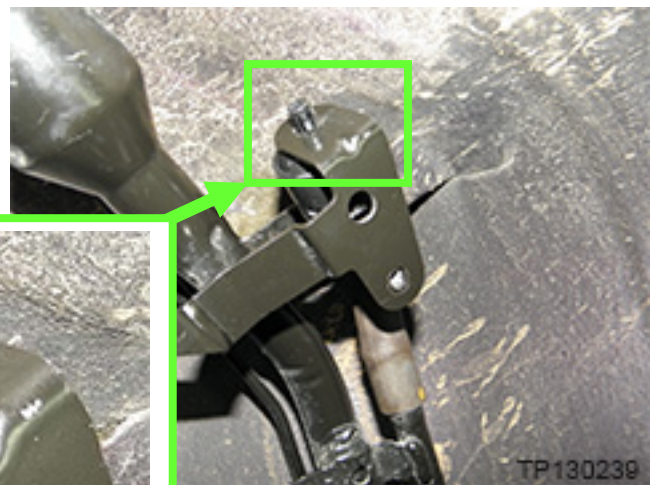


Figure 2

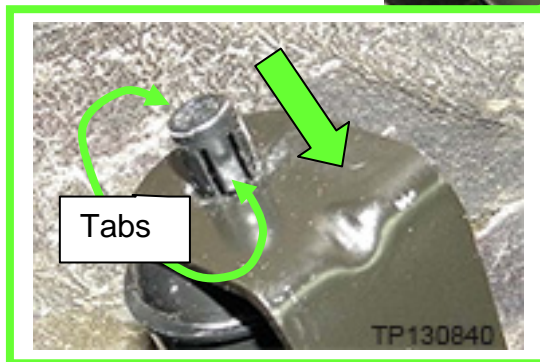

3. Remove the filter from the hose.
4. Reassemble with new the new filter from the part information table in the reverse order.

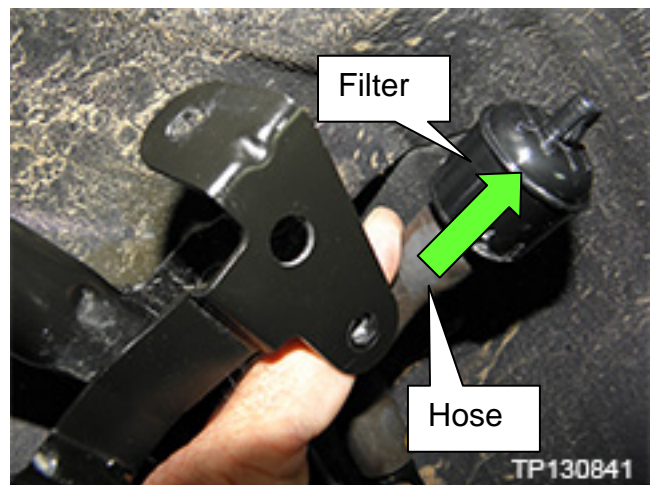


Figure 3

PARTS INFORMATION

DESCRIPTION	PART #	QUANTITY
Tube Assy-Filler	17221-1PA0C	1
Vent Filter	18793-1LA0A	1

CLAIMS INFORMATION

Submit a Primary Part (PFP) type line claim using the following claims coding:

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Replace Tube Assy-Filler	(1)	FB30AA	HC	32	(2)
Replace Vent Filter		FX49AA			0.3

- (1) Use the Fuel Filler Tube Assembly part number in the Part Information as the Primary Part (PFP)
- (2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated flat rate time.

