



INSTRUCTION TO SERVICE

ITS: 5322

SECTION:	231 Cooling System
WRITTEN BY:	Michael Rooney
SUBJECT:	ISE Cooling Loop Bypass Removal

ITS5322

THIS DOCUMENT AND THE CONTENTS DISCUSSED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF NEW FLYER INDUSTRIES CANADA ULC AND NEW FLYER OF AMERICA INC. AND ARE DISCLOSED BY NEW FLYER IN CONFIDENCE. THIS DOCUMENT AND THE CONTENTS HEREIN ARE NOT TO BE DISCLOSED BY THE INTENDED RECIPIENT WITHOUT THE PRIOR WRITTEN AUTHORIZATION OF NEW FLYER. ANY UNAUTHOIZED DISCLOSURE, REPRODUCTION OR OTHER DISTRIBUTION OF THIS DOCUMENT OR INFORMATION IS STRICTLY PROHIBITED AND MAY RESULT IN ACTION BEING TAKEN AGAINST THE PARTY MAKING THE UNAUTHORIZED DISCLOSURE. THIS DOCUMENT AND ALL COPIES HEREOF MUST BE RETURNED TO NEW FLYER UPON REQUEST.

PROCEDURE:

1. Turn the main battery disconnect switch to the “OFF” position.

 **WARNING:** ALWAYS discharge the Ultra Capacitors before performing maintenance on this vehicle. Refer to Section 5 of the service manual under 2.17 *Discharging the Ultra Capacitors* for the discharge procedure.

2. Locate the center three chesterfield seats at the rear of the passenger compartment. Pivot the seats upward and install the prop rod to allow access to the removable panels under and behind the seats. Figure 1.

 **NOTE:** Take care while working around the raised seats, head clearance is limited.

3. Using a square key, release the access cover latches and remove the access covers. Figure 1.



Figure 1: Access Openings Under Chesterfield Seats.

4. Locate the upper and lower coolant manifolds, generator and two electric drive motors. Figure 2.
5. Check to ensure that upper manifold header and components are plumbed as follows: Figure 2.
 - a. Street side branch of the upper manifold header should be closed off.
 - b. Second from street side branch of the upper manifold header should be plumbed to the street side port of the street side electric drive motor.
 - c. Curb side branch of the upper manifold heater should be plumbed to the lower port of the generator.
 - d. Second from curbside branch of the upper manifold header should be plumbed to the streetside port of the curbside electric drive motor.

6. Check to ensure that lower manifold header and components are plumbed as follows: Figure 2.
 - a. Street side branch of the lower manifold header should be plumbed to the coolant pump.
 - b. Second from street side branch of the lower manifold header should be plumbed to the curb side port of the street side electric drive motor.
 - c. Curb side branch of the lower manifold heater should be plumbed to the upper port of the generator.
 - d. Second from curbside branch of the lower manifold header should be plumbed to the curb side port of the curbside electric drive motor.

NOTE: Most buses have a bypass hose connecting the upper and lower manifold headers as well as a Y-connection to the electric drive motors which will require modification.

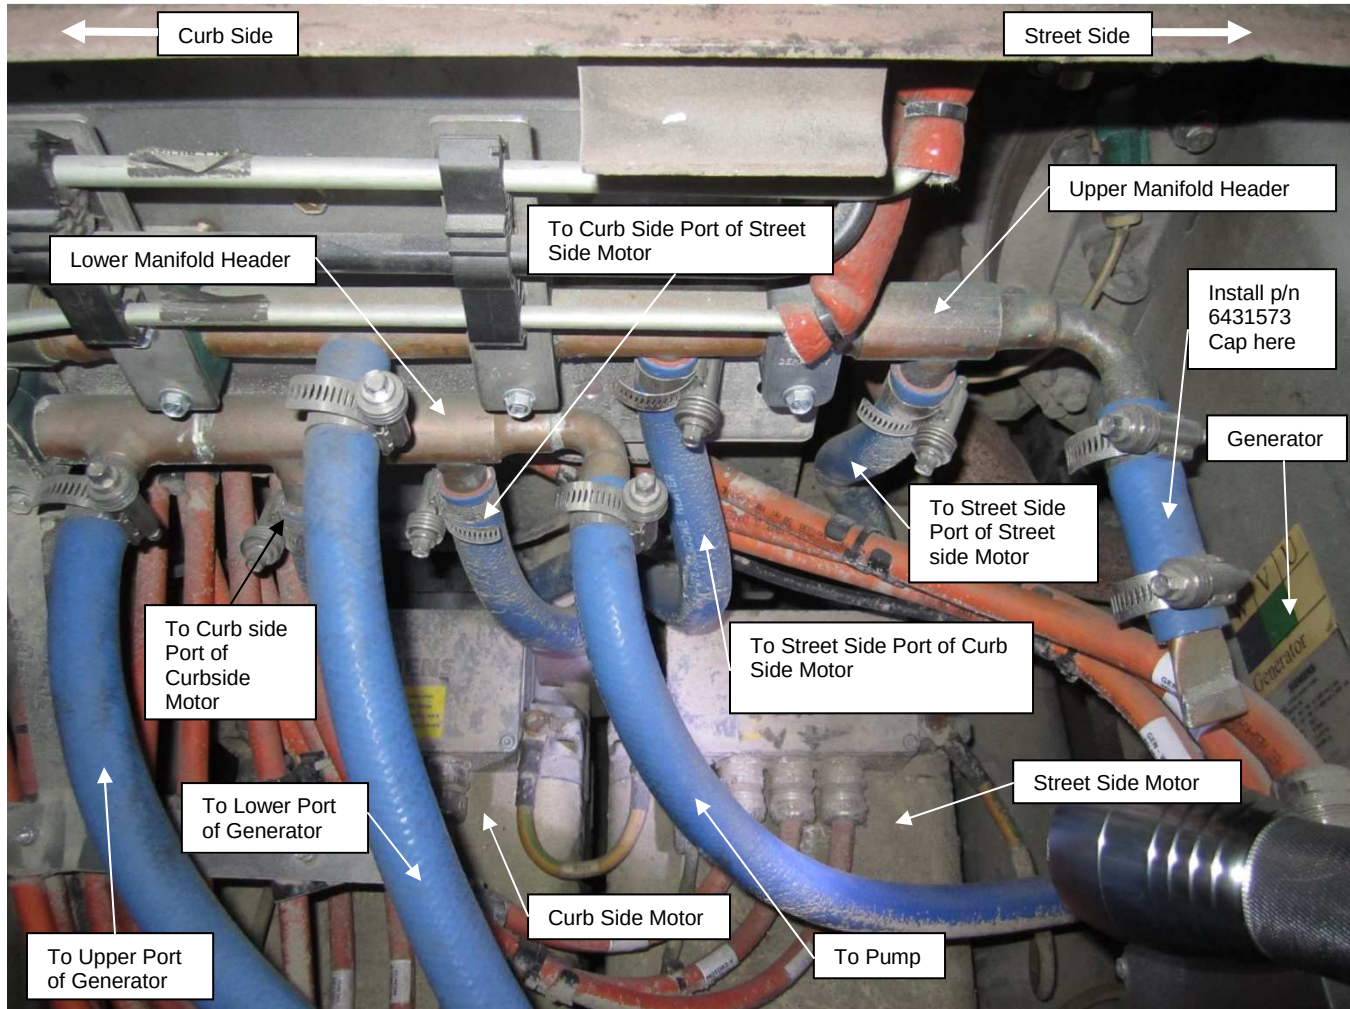


Figure 2: Hose Layout on Upper/Lower Manifold Headers

7. Open the curb side rear access door and locate the coolant circulation pump.
8. Check to make sure that the hoses are connected according to Figure 3.

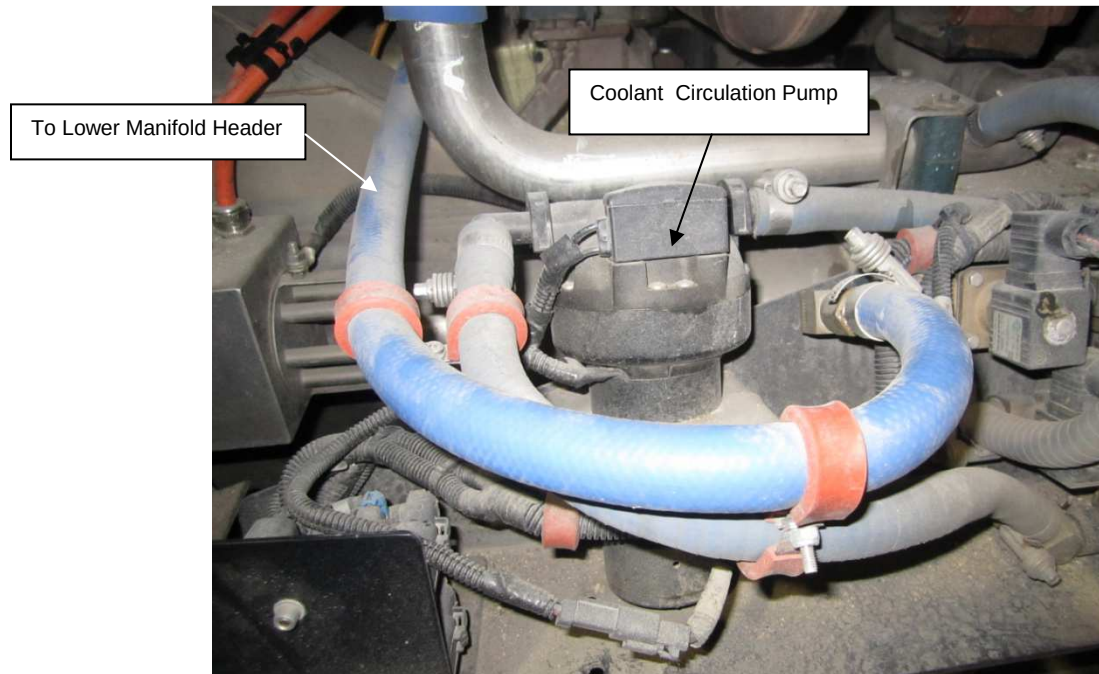


Figure 3: Hose Layout at Coolant Circulation Pump.

9. If the hose layout at the upper and lower manifold headers does not match Figure 2 and or the bypass hose is present, the hoses will have to be reconfigured.
 - a. Drain the coolant from the electronics cooling loop.
 - b. Change the hose connections as necessary to match the configuration shown in Figure 2. Use 3/4" hose NF P/N 106197 and hose clamps NF P/N 274935 as needed. Torque hose clamps to 56-62 IN-LBS.
 - c. Refill the cooling system.
10. Locate the street side branch of the upper manifold. Figure 2.
 - a. Use a Rotary Tube Cutter to cut the end of the tube to remove the bead.
 - b. Check that the end cut is square and that there are no burrs or damage. Use some emery paper to clean up the exterior surface of the tube if necessary.
 - c. Install the nut, washer and tapered washer from the cap NF P/N 6431573 over the tube. Fig 4, Picture #1.
 - d. Push the plug into the end of the tube and install the nut on the plug finger tight then turn an additional 1/4 turn. Fig 4, Picture #2.

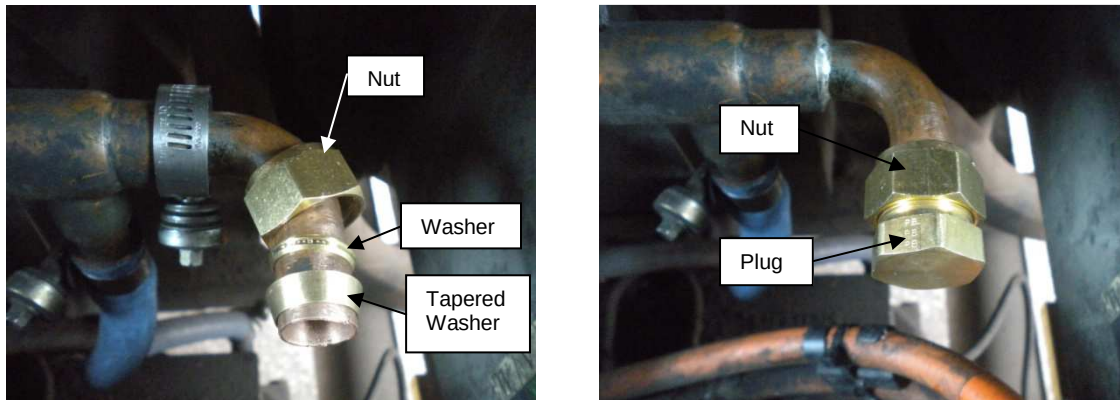


Figure 4: Bypass Tube Plug Installation.

11. Refill the cooling system and check for leaks.
12. Re-install the access covers.
13. Lower the rear chesterfield seats.
14. Turn the main battery disconnect switch to the "ON" position.
15. De-aerate the cooling system by topping off the electronics cooling system with fresh coolant while running pumps with master switch on. Continue to run pumps for ten minutes after full fill to de-aerate. Coolant level should be checked after the test drive and refilled as necessary.
16. Remove all tools and debris to return coach to service condition.



LABOUR ESTIMATE

	Operation	Men	Hours	Labour Time M X HR
1	ISE Cooling Loop Bypass Removal	1	1.0	1.0

PARTS REQUIRED

Item	Part Number	Description	Qty. per Coach	Units	Notes
1	106197	SPEC-HTR HOSE 0.75 ID	5.2	FT	
2	274935	CLAMP-1.125 DIA TUBE	6	EA	
3	6431573	PARKER ¾" CAP, A-LOK®	1	EA	

SPECIAL TOOLS REQUIRED

Item	Part Number	Description	Qty. per Coach	Units	Notes
		NO SPECIAL TOOLS REQUIRED			