



Service Bulletin

File in Section: -

Bulletin No.: PIC5964A

Date: December, 2014

PRELIMINARY INFORMATION

Subject: Diagnostic Tip - Clarification Of Vehicles Equipped With Fog Light (RPO T3U)

Models: 2014 - 2015 Buick Lacrosse

This PI was superseded to update Model Years. Please discard PIC5964.

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

Condition/Concern

Some customers may indicate the vehicle appears to be equipped with fog lights below the front bumper however, the vehicle is not equipped with a switch.

Recommendation/Instructions

In order for this vehicle to be equipped with Fog Lamps the SPID label or vehicle build sheet must have RPO T3U. Vehicles built with the RPO T4A (HEADLAMPS-HALOGEN) are not equipped with Fog Lamps (RPO T3U).

Vehicles equipped with RPO T4A (HEADLAMPS-HALOGEN) use the Lamps in the lower right / lower left portion of the Front Bumper Fascia as Daytime Running Lamps (DRLs).

Both RPO T4A (HEADLAMPS-HALOGEN) and RPO T4F (HEADLAMPS-HIGH INTENSITY DISCHARGE) have hockey stick shaped lights as part of the headlight assembly.

Refer to the pictures below:


BASE equipped RPO T4A (HEADLAMPS-HALOGEN) without (RPO T3U) Images 1 and 2.





3721289

UPLEVEL equipped RPO T4F (HEADLAMPS-HIGH INTENSITY DISCHARGE) Images 3 and 4.

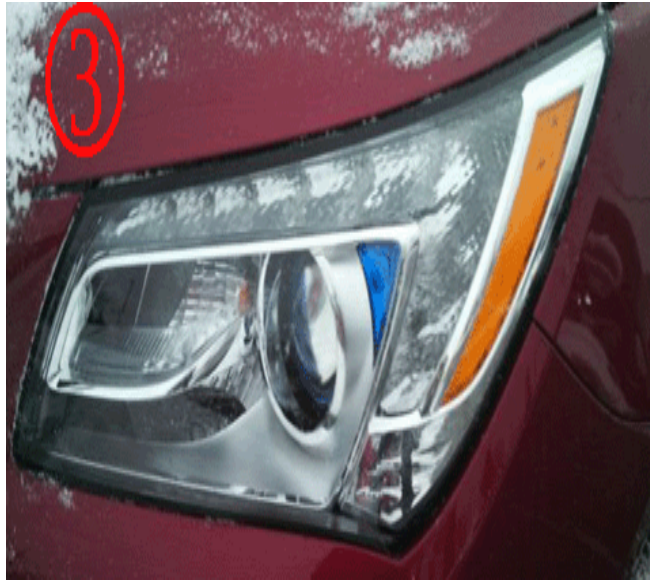

3723125



3723127

Daytime Running Light (base)



3721305

Fog Lamp (uplevel)



3721310

Fog Lamp Switch RPO T4F (HEADLAMPS-HIGH INTENSITY DISCHARGE and RPO T3U) is in the center of headlight switch.



3721297

No Fog Lamp switch RPO T4A (HEADLAMPS-HALOGEN)



3721292

Customer Information

For vehicles not built with Fog Lamps (RPO T3U), please communicate to the customer this condition is a normal operating characteristic of their vehicle. Please share this information with the customer, including a copy of this message.

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.