


GSM Label Location.jpg

GSM Label2.jpg

Reference	SSM71561
Models	LR4 / L319 Range Rover (All New) / L405 Range Rover Evoque / L538
Title	Transmission Control Switch (TCS/GSM) Failure to rise (DTC P176B – 71)
Category	Electrical
Last modified	05-Feb-2014 00:00:00
Symptom	203000 Basic Electrical
Content	<p><u>Issue:</u> Following a recent campaign a few customers have reported that the Transmission Control Switch unit(s) fails to rise or initially rises before lowering itself back to its default position for an ignition off state, which is confirmed by DTC P176B - 71 (Transmission Range Selector Up and Down Position Control Error)</p> <p><u>Cause:</u> Potential of a mixed stock condition</p> <p><u>Action:</u> Please submit an ePQR detailing the failure mode, together with the session files and a picture of the TCS/GSM label as which is located at the right hand side of the connector, as shown in attached picture. Once details have been attached to ePQR, then please proceed to replace GSM unit</p>

IP BJ32-7E453-AC
/30S LK 10 0219 25

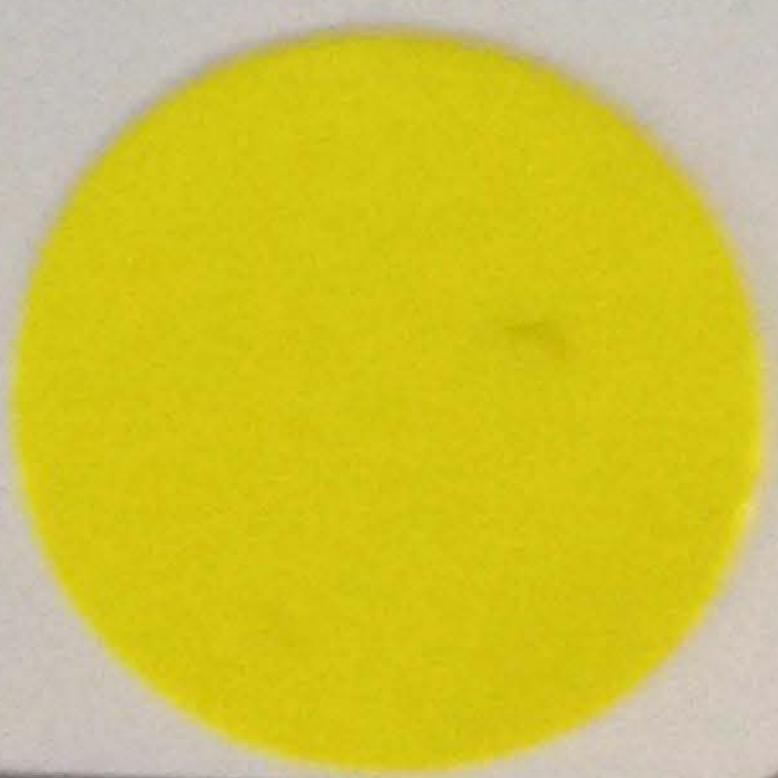

/HW 04
/SW 20.2.8
/AS 01
/SN 90125132940013
/DAP 21.10.13:00.21