

A PDF of this newsletter and previous ones can be found by logging in to ServiceNet and clicking on the [Elsa Newsletter](#) section in the Technician References menu.

Audi
Truth in Engineering



Audi Elsa Newsletter

Edition 158: October 19, 2015

Content

- [ODIS Service Installation Version V2.2.6 DVDs](#)
- [Technical Bulletins](#)
- [Pending Service Solutions](#)
- [Campaigns](#)
- [Updates](#)
- [Suggestions](#)




ODIS Service Installation Version V2.2.6 DVDs

Many recent calls to the Diagnostic Software Support (DTSS) line indicated confusion on how the recently-received ODIS Service **Installation Version 2.2.6** DVDs were to be used. Callers either disregarded, or were unaware of the DVD shipment cover letter instructions that are glued to the DVD sleeves. Being unaware of the cover letter instructions resulted in many callers attempting to use the DVDs to update existing installations.

The DVD shipment cover letter (see below) clearly states that the V2.2.6 DVDs are **not update DVDs**, and that they are **ONLY** to be used to install ODIS Service on brand

new diagnostic devices, and to reinstall ODIS Service on exiting devices to resolve malfunctioning software:

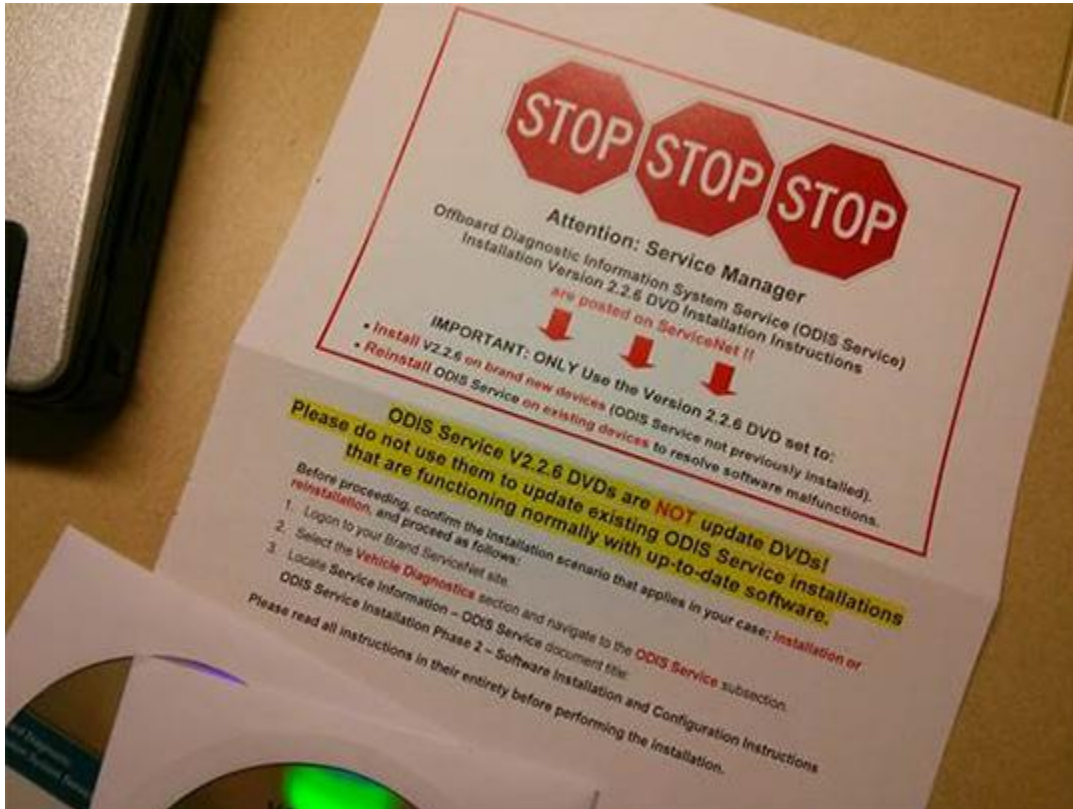

To avoid confusion and unnecessary calls to DTSS, please ensure that the **V2.2.6 DVD shipment cover letter instructions remain attached to the DVD sleeves in their storage location**, and that all individuals tasked with managing ODIS Service in the workshop are aware of their intended use. If the cover letter has already been discarded, please request a replacement (.pdf for you to print locally) from softwaresupport@vw.com.

[Back to top](#)

Technical Bulletins

94 "Headlight range control: System error" or "Audi side assist: Currently not available" warning (DTC U112100) (2042028/1)

Model(s)	Year	Vehicle Specific Equipment
A3, TT	2015	Not Applicable
Condition: One of the following conditions is present: • The message "Headlight range control: System error" is shown in the driver information system, but there is no limitation with the headlight system. The headlight system operates normally. • The message "Audi side assist: Currently not available" is shown in the driver information system. The Audi side assist system will be unavailable in the current ignition cycle, but cycling the ignition resolves the concern and Audi side assist will be available again. Production Solution: New software implemented in series production.		

45 Vehicle will not communicate with scan tool (2042048/1)

Model(s)	Year	Vehicle Specific Equipment
A4, A6, A8	1997-2001	Not Applicable
Condition: • Vehicle will not communicate with diagnostic scan tool or emissions test equipment. • Customers may have issues with vehicle passing state IM emissions test programs because the scan tool cannot communicate with the vehicle. • ABS and/or brake lamp(s) will be illuminated in IP cluster. Production Solution: Not applicable.		

[Back to top](#)

**44 Steering wheel shimmy, vibration, and/or oscillation
(2022563/12)**

Model(s)	Year	Vehicle Specific Equipment
All	2008–2016	Not Applicable
Condition: • Customer feels vibration in the seat, vehicle floor, footwell, pedals, or steering wheel. This condition does not lead to any handling concerns or loss of vehicle control. • Customer feels the vibration while driving at highway speeds from 55 – 80 mph (88 – 128 km/h). Production Solution: Not applicable.		

**01 Engine warning lamp on; DTC entries about AVS adjustment
(2042071/1)**

Model(s)	Year	Vehicle Specific Equipment
A6, A7, A8	2013–2015	4.0TFSI
Condition: One or more of the following conditions is present: • Engine warning lamp is illuminated. • EPC lamp is illuminated. • The engine runs irregularly. • DTCs related to the cylinder on demand (COD) function are stored in the engine control module, J623 (address word 01). Production Solution: Optimized production.		

01 MIL on (DTC P0491/P0492 secondary air system bank 1/2 through-flow too low/malfunction) (2035002/2)

Model(s)	Year	Vehicle Specific Equipment
A8	2010–2012	4.2FSI
Condition: • MIL on. • The following DTCs are stored in the engine control module, J623 (address word 01):		

- DTC P0491 (secondary air system bank 1, low flow)
- DTC P0492 (secondary air system bank 2, low flow)

Production Solution: Not applicable.

91 Audi music interface (AMI): iPod-related complaints (2016513/5)

Model(s)	Year	Vehicle Specific Equipment
A4	2009	Audi music interface (AMI)
A5, A8, Q7	2008–2009	Audi music interface (AMI)
A6	2008	Audi music interface (AMI)

Condition: the Audi music interface (AMI):

- In Mix (shuffle) mode, very long response times and subsequent malfunctions occur when the next track is being selected. Long response times also occur when the “Return” hard key is pressed.
- In Mix (shuffle) mode, the previous track is not played when the “Previous” button is selected in the CD control menu. A different track plays instead.
- In Mix (shuffle) mode, when the first track of the playlist was selected via the “Previous” button in the CD control menu (rather than with the rotary push button), the track list shown in the MMI does not match the track list shown in the driver information panel (synchronization issue).
- In Mix (shuffle) mode, the current track is not highlighted in white letters in the MMI display.
- If the current track is selected again via the rotary push button, the audio briefly drops out.
- The current track is not color-highlighted in the MMI display.
- Audiobook tracks continuously fast-forward if “Fast Forward” was selected in the first few seconds after the track started playing.
- The message “Device is being initialized. Please wait...” is displayed when a second generation iPod Nano is installed.
 - iPod locks up but is operable again after the iPod is reset.
 - iPod performs a reset and restarts on its own.
 - iPod is not detected when it is plugged into the AMI.
- The message “Device or cable type not supported” appears in the MMI display.

Production Solution: Not applicable.

90 Head-up display does not power on or does not work (2042121/1)		
Model(s)	Year	Vehicle Specific Equipment
A6, A7, A8	2014–2016	Head-up display
Condition: - The head-up display will not power on or does not work. - After the next bus silence (for example, waiting five minutes after the driver side door is locked), the head-up display works correctly. Production Solution: New optimized software in the head-up display control module, J898 (address word 82) addressed the condition.		

Pending Service Solutions

No new pending service solutions this week.

Campaigns

No new campaigns this week.

Updates

No new updates this week.

Suggestions

Please send comments or suggestions to: aoa.workshopinformation@audi.com

[Back to top](#)

© 2015 Audi of America, Inc. All rights reserved. Information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Audi of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher.