

Date	Expiration	Release	Page
06.2015	06.2017	1	1(2)

Release 1: This document supersedes previous revisions.
June 12, 2015 Initial release

WIPER ARM MODIFICATION Prevost vehicles

DESCRIPTION

On the vehicles affected by this bulletin, add an extrusion to the wiper arms to prevent washer fluid hose from pinching

MODEL YEAR(S) AND VEHICLES INVOLVED

NOTICE TO SERVICE CENTERS	
Verify vehicle eligibility by checking warranty bulletin status with SAP or via ONLINE WARRANTY SYSTEM available on Service / Warranty tab of Prevost website.	
Model	VIN
X3-45 Commuter Model Year : 2015	From 4RKG33499F9737002 up to 4RKG33497F9737015 incl.
This bulletin does not necessarily apply to all the above-mentioned vehicles, some vehicles may have been modified before delivery. The owners of the vehicles affected by this bulletin will be advised by a letter indicating the Vehicle Identification Number (VIN) of each vehicle concerned.	

MATERIAL NEEDED

Order the following parts:

Part No.	Description	Qty
300642	HOSE HOLDER	2

NOTE
Material can be obtained through regular channels.



PROCEDURE

 DANGER
Park vehicle safely, apply parking brake, stop engine. Prior to working on the vehicle, set the ignition switch to the OFF position and trip the main circuit breakers equipped with a trip button. On Commuter type vehicles, set the battery master switch (master cut-out) to the OFF position.

Locate the wiper arms on the vehicle.

For each wiper parallelogram assembly, install one extruded spacer on the arm having the washing fluid hose 300642 qty 2

Important : Orient as shown, with slot underneath.

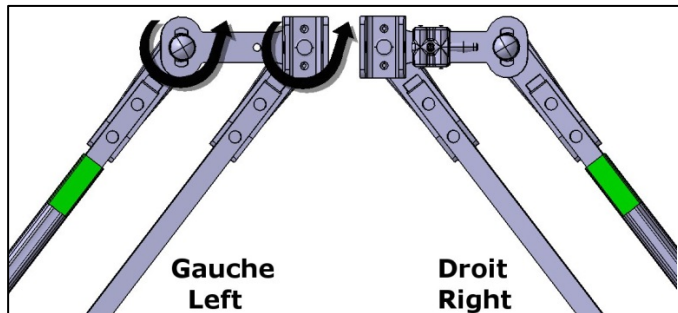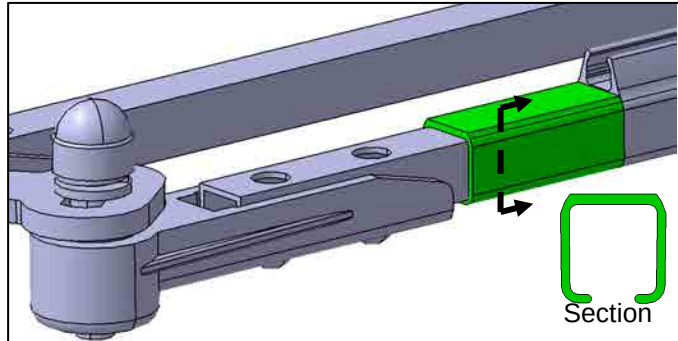

PARTS / WASTE DISPOSAL

Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

ESTIMATED TIME

The time required to perform this special bulletin is approximately one hour.

OTHER

VBC Bulletin	N/A
Fail Code	23.05
Defect Code	09
System Condition	B
Causal Part	300642

Prevost engages in a continuous program of testing and evaluating to provide the best possible product. Prevost, however, is not committed to, or liable for updating existing products.