



Service Bulletin

INFORMATION


Subject: Rear Turn Signal Socket Does Not Correctly Connect to Body Harness When Installing Accessory Tail Lamps and/or Replacing Rear Turn Signal Socket

Attention: This Bulletin also applies to any of the models that may be Export vehicles.

| Brand: | Model: | Model Year: | | VIN: | | Engine: | Transmission: |
|----------|--------|-------------|------|------|----|---------|---------------|
| | | from | to | from | to | | |
| Cadillac | SRX | 2015 | 2016 | | | All | All |

| | |
|------------------|--|
| Condition | Technicians may notice when replacing rear turn signal bulb sockets on SRX Sport models, or installing accessory clear lens tail lamp assemblies, that the turn signal socket may not correctly fit into the body harness connector. |
|------------------|--|

Correction

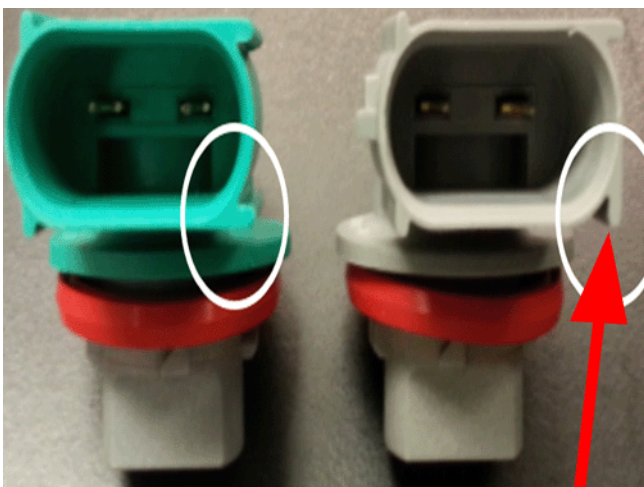

If you encounter a vehicle with the above concern, use a piece of sand paper or equivalent to sand the guide pin off to correctly fit the body harness.

Important: Do NOT replace the tail lamp assembly, body harness or body harness connector for this concern.

| | |
|-----------------|---|
| Version | 1 |
| Modified | |

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION