

Special Bulletin

SP15-302

Date	Expiration	Release	Page
05.2015	05.2017	2	1(3)

Release 2
May 05, 2015 Added Kit number SP15-302

KNEELING ALARM REPLACEMENT Prevost vehicles

DESCRIPTION

On the vehicles affected by this bulletin, perform the replacement of the kneeling alarm buzzer assembly.

MODEL YEAR(S) AND VEHICLES INVOLVED

NOTICE TO SERVICE CENTERS <i>Verify vehicle eligibility by checking warranty bulletin status with SAP or via ONLINE WARRANTY SYSTEM available on Service / Warranty tab of Prevost website.</i>	
Model	VIN
X3-45 Commuter Model Year :2014, 2015	The following individual vehicles : 2PCG33495 <u>EC735590</u> , 2PCG33498 <u>EC735602</u> , 4RKG33495 <u>F3737002</u> 4RKG33497 <u>F3737003</u> , 4RKG33499 <u>F3737004</u> , 4RKG33490 <u>F3737005</u> 4RKG33492 <u>F3737006</u> , 4RKG33494 <u>F3737007</u> , 4RKG33496 <u>F3737008</u> 4RKG33498 <u>F3737009</u> , 4RKH33498 <u>F3717010</u> , 4RKH3349X <u>F3717011</u>
This bulletin does not necessarily apply to all the above-mentioned vehicles, some vehicles may have been modified before delivery. The owners of the vehicles affected by this bulletin will be advised by a letter indicating the Vehicle Identification Number (VIN) of each vehicle concerned.	

MATERIAL NEEDED

Order kit number SP15-302 which includes the following parts:

Part No.	Description	Qty
069301	Buzzer	1

Other parts that may be required:

Part No.	Description	Qty
5001608	WASHER, BELLEVILLE G500 6.2X15.0X0.7	1
502830	SCREW, CAP, HEX N500 M6 -1.0X20 G8.8	1

NOTE Material can be obtained through regular channels.

PROCEDURE



DANGER

Park vehicle safely, apply parking brake, stop engine. In the battery box, set the battery cut-off switch to the OFF position prior to working on the vehicle.

- 1) Lift vehicle with column lifts.
- 2) Locate the horn housing recessed in the under floor, curb side, under the entrance staircase.
- 3) Replace the kneeling alarm by 069301 (fig. 1). Pass wiring thru floor to inside of vehicle and reconnect. New connection is Blue –Black.

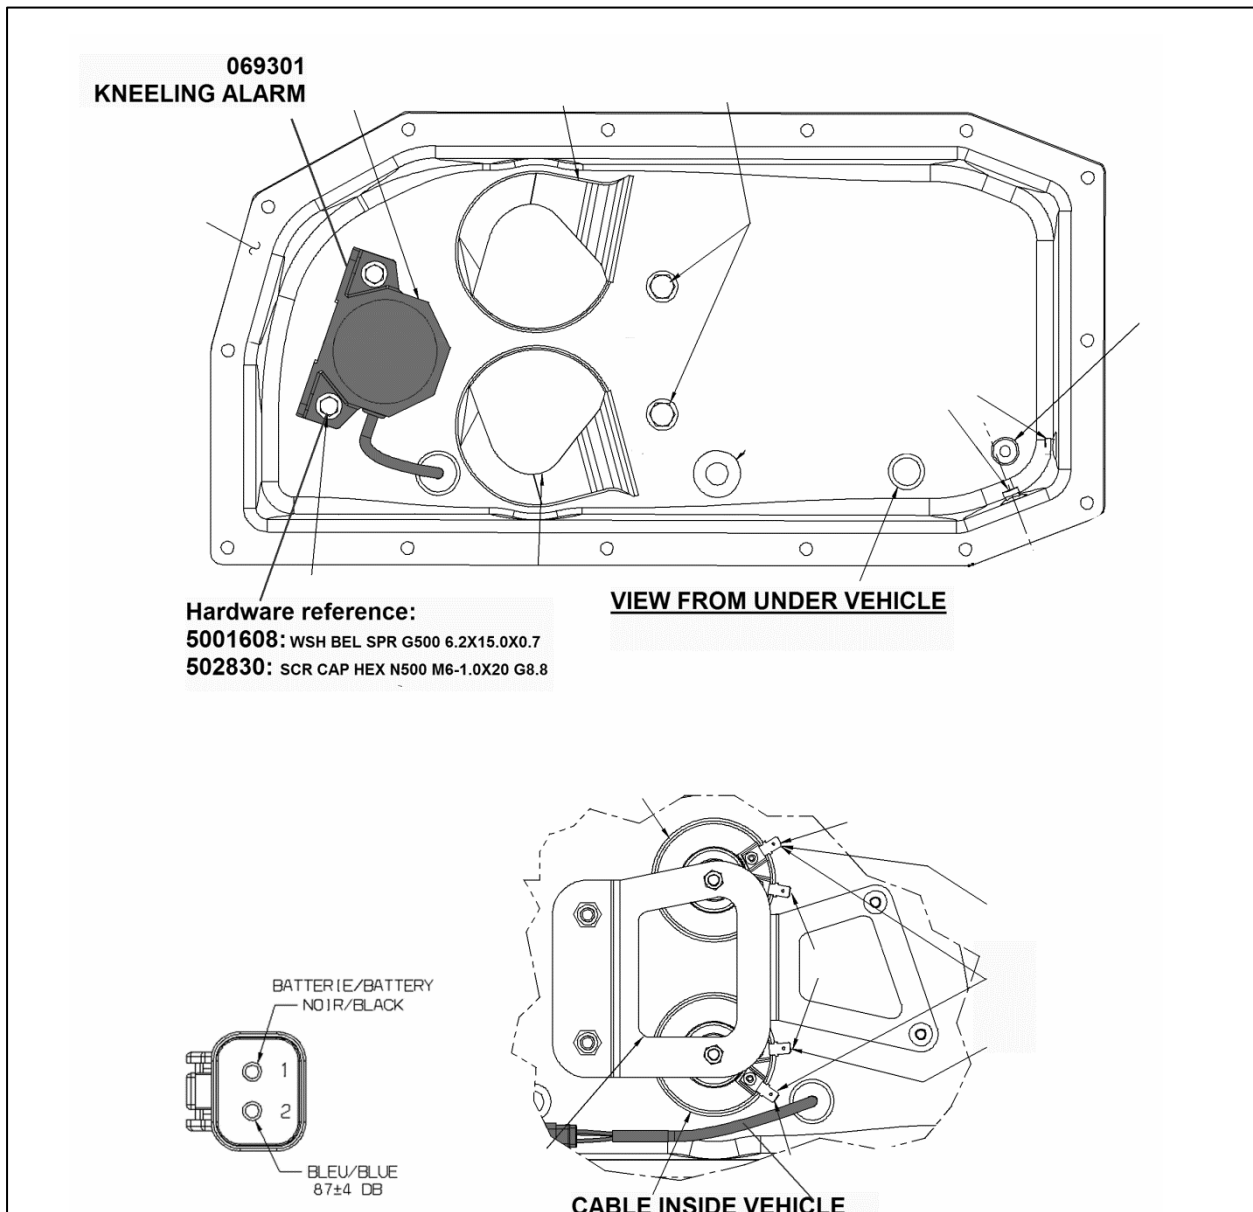


Figure 1

Date	Expiration	Release	Page
05.2015	05.2017	2	3(3)

PARTS / WASTE DISPOSAL

Return replaced parts to Prevest with A.F.A. for full reimbursement.
Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

ESTIMATED TIME

The time required to perform this special bulletin is approximately one hour.

OTHER

VBC Bulletin	N/A
Fail Code	23.06
Defect Code	09
System Condition	B
Causal Part	065593

Prevest engages in a continuous program of testing and evaluating to provide the best possible product. Prevest, however, is not committed to, or liable for updating existing products.