

Date	Expiration	Release	Page
04.2015	04.2017	1	1(4)

Release 1: This document supersedes previous revisions.
XXXXXXXXXXXXXX

DRAIN EXTENSION ON DIFFUSER Prevost vehicles

DESCRIPTION

On the vehicles affected by this bulletin, the end of the exhaust diffuser drain tube may not be properly attached.

MODEL YEAR(S) AND VEHICLES INVOLVED

NOTICE TO SERVICE CENTERS	
<i>Verify vehicle eligibility by checking warranty bulletin status with SAP or via ONLINE WARRANTY SYSTEM available on Service / Warranty tab of Prevost website.</i>	
Model	VIN
X3-45 Commuter Model Year : 2014 - 2015	From 2PCG33495 <u>EC735590</u> up to 4RKG33498 <u>F9737007</u> incl.
<p><small>This bulletin does not necessarily apply to all the above-mentioned vehicles, some vehicles may have been modified before delivery. The owners of the vehicles affected by this bulletin will be advised by a letter indicating the Vehicle Identification Number (VIN) of each vehicle concerned.</small></p>	

MATERIAL NEEDED

Order the following parts:


Part No.	Description	Qty
5011119	ADAPTER / 1/2NPT-Fx1/2NPT-M	1

Other parts that may be required:

Part No.	Description	Qty
680107	LOCTITE #567 THREAD SEALANT, WHITE, 50ml	A/R


NOTE
<i>Material can be obtained through regular channels.</i>

PROCEDURE

 DANGER
<p>Park vehicle safely, apply parking brake, stop engine. In the battery box, set the battery cut-off switch to the OFF position prior to working on the vehicle.</p>

Date	Expiration	Release	Page
04.2015	04.2017	1	2(4)

- 1) In the engine compartment, inspect the lower part of the diffuser and make sure there is an excess length allowing proper seating of the clamp.
- 2) If it is not the case, unscrew the clamp to free the tube.

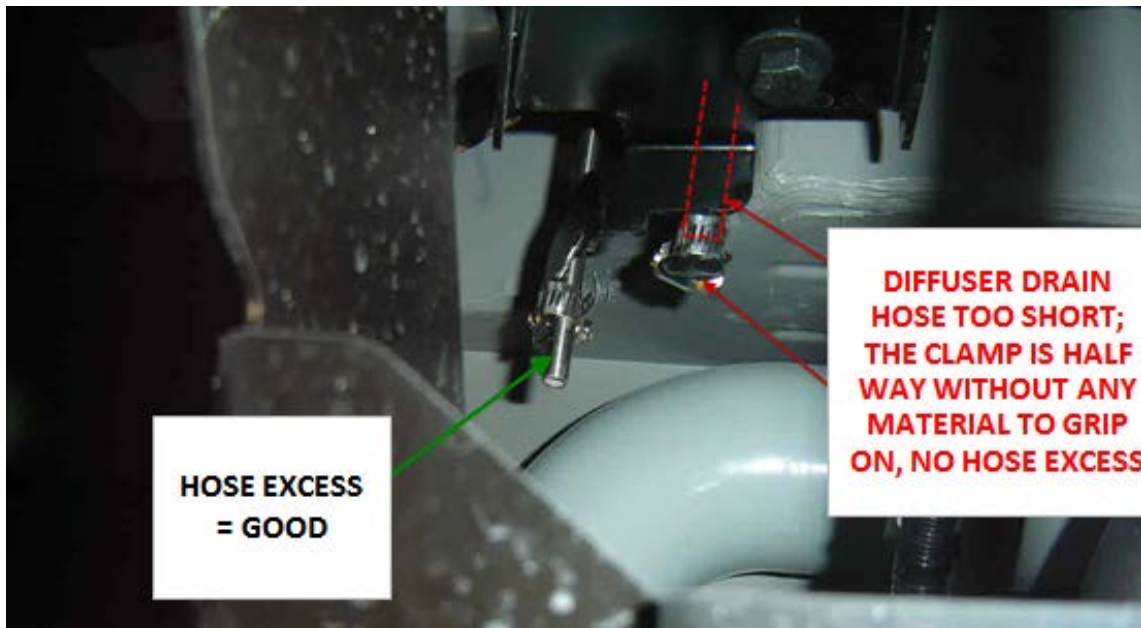



- 3) Add adapter #5011119 to the upper connexion.
- 4) Re-tighten lower clamp.

PARTS / WASTE DISPOSAL

Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

ESTIMATED TIME

The time required to perform this special bulletin is approximately thirty (30) minutes.

Date	Expiration	Release	Page
04.2015	04.2017	1	4(4)

OTHER

VBC Bulletin	N/A
Fail Code	04.03
Defect Code	09
System Condition	B
Causal Part	040863

Prevost engages in a continuous program of testing and evaluating to provide the best possible product. Prevost, however, is not committed to, or liable for updating existing products.