

Retail Operator / General Manager	Sales – Motorcycles	Sales – Used Motorcycles	Business Manager (F&I)	Service	Parts & Accessories	Administration
Date: May, 2015 Bulletin #: 00 003 15 (010)		Source: BMW Motorrad USA Name: Gery Torok Title: PuMA Technical Specialist				




BMW Motorrad USA

Service Information Bulletin

Subject: ICOM Firmware update via ISTA

Details: With version ISTA 3.49.10 there will be an automatic firmware update for the ICOM.

If an ICOM has an old firmware version, the ICOM will have the status "Firmware" in the ISTA connection manager.

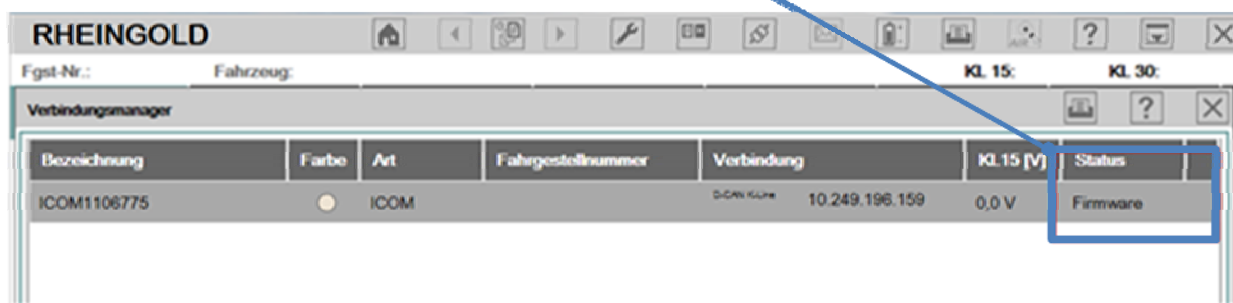

You can no longer work with this ICOM until a software update on the current firmware has been performed.
The following steps are necessary to perform the firmware update

Step 1.



Please make sure that,


- the ICOM is connected to a vehicle
- the ignition is ON
- The ICOM and the device where ISTA is running are in the same subnet

Click on "Identification"




Step 2.


Click on "Connection manager"

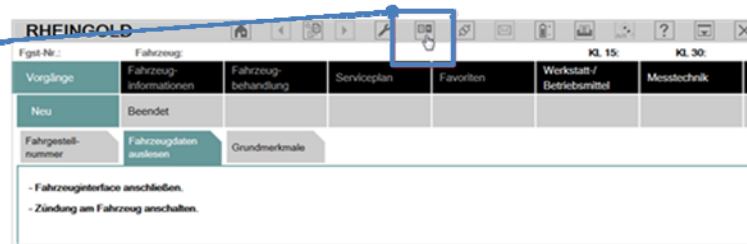**Step 3.**

Select the ICOM and click on the button "Configure vehicle interface".

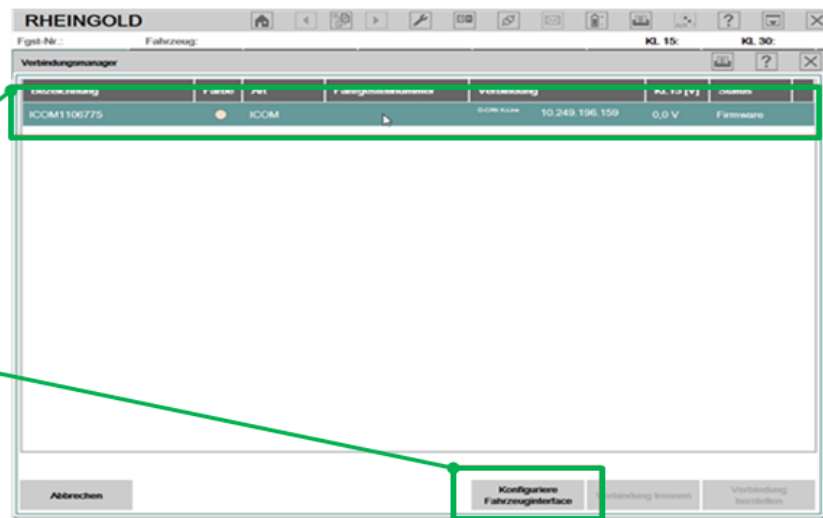**Step 4.**

The ICOM is updated automatically.

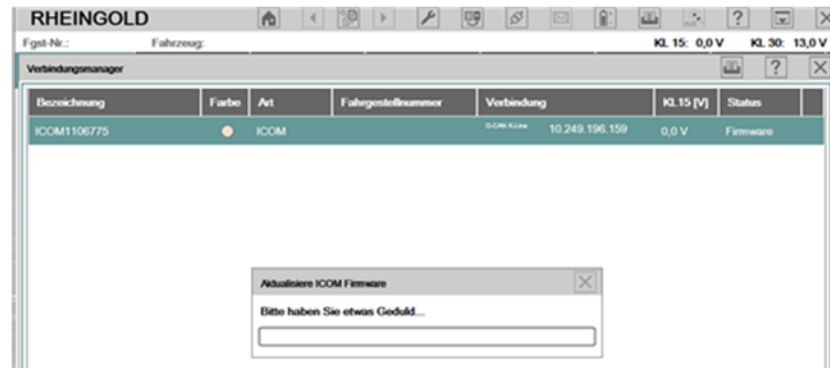

The ICOM can now be used again.

Contact Information:

Motorcycle Service and Technical Manager

Gordon.McDonnell@bmwna.com