



SERVICE BULLETIN

Classification:

FA14-001b

Reference:

NTB14-088b

Date:

April 1, 2015

NOISE WHEN TURNING THE STEERING WHEEL

The APPLIED VEHICLES section has been amended. No other changes have been made.
Please discard previous versions of this bulletin.

APPLIED

VEHICLES: 2013 - 2015 LEAF (ZE0) 2013 - 2015 NV200 (M20)
2013 Juke (F15) 2014 - 2015 NV200 Taxi (M20)
2013 - 2015 Sentra (B17)

APPLIED

VINs/DATES: 2013 - 2015 LEAF - all
2013 Juke - all
2013 - 2014 NV200/NV200 Taxi - all
2015 NV200/NV200 Taxi - built before 3N(*)CM0(**)FK 711576 / Mar 9, 2015
2013 Senta - all
2014 Sentra:
 If 11th digit is **Y** - built before 3N1AB7AP(*)E**Y** 326356 / Nov. 1, 2014
 If 11th digit is **N** - (1N4AB7AP(*)E**N** xxxxxx) - all
 If 11th digit is **L** - (1N4AB7AP(*)E**L** xxxxxx) - all
2015 Sentra:
 If 11th digit is **L** - built before 3N1AB7A(* *)**FL** 624162 / Oct. 30, 2014
 If 11th digit is a **N** or **Y**, this bulletin does not apply.

IF YOU CONFIRM:

There is a noise (clunking, popping, or bumping) when the steering wheel is turned.

AND

The noise is coming from the top of either front strut assembly.



NOTE: The location of the noise can be determined by using Essential Tool J-39570 (Chassis Ear), positioning a clamp on each front strut spring, and then turning the steering wheel back and forth.

ACTION:

Install a spacer in both the left front and right front strut assemblies where shown in this bulletin.

- Refer to the appropriate Electronic Service Manual (ESM), section **FSU- Front Suspension**, for removal and installation instructions.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

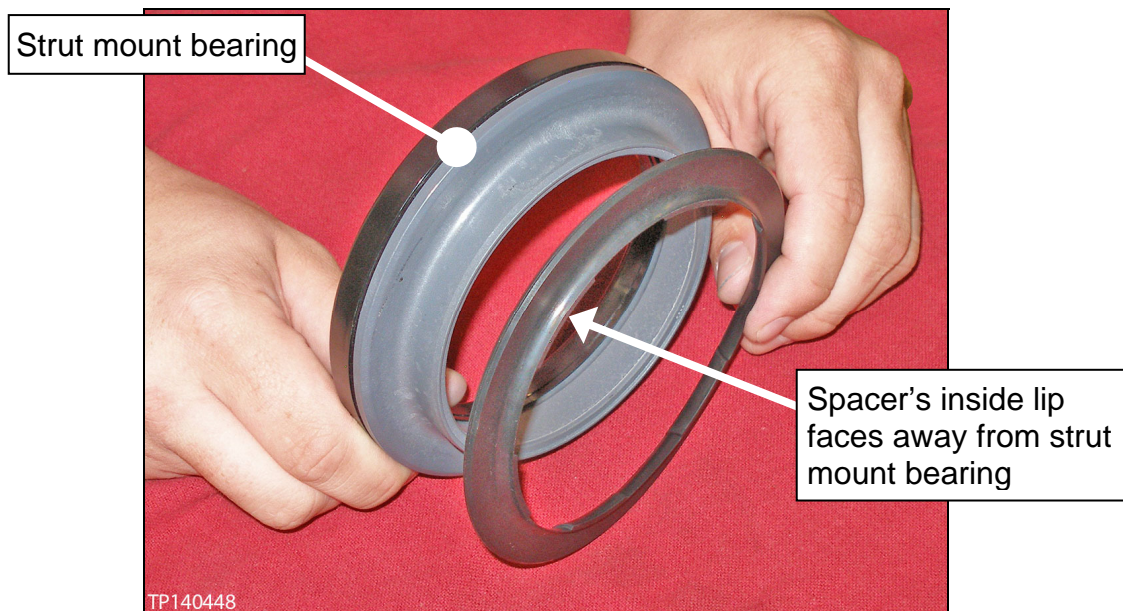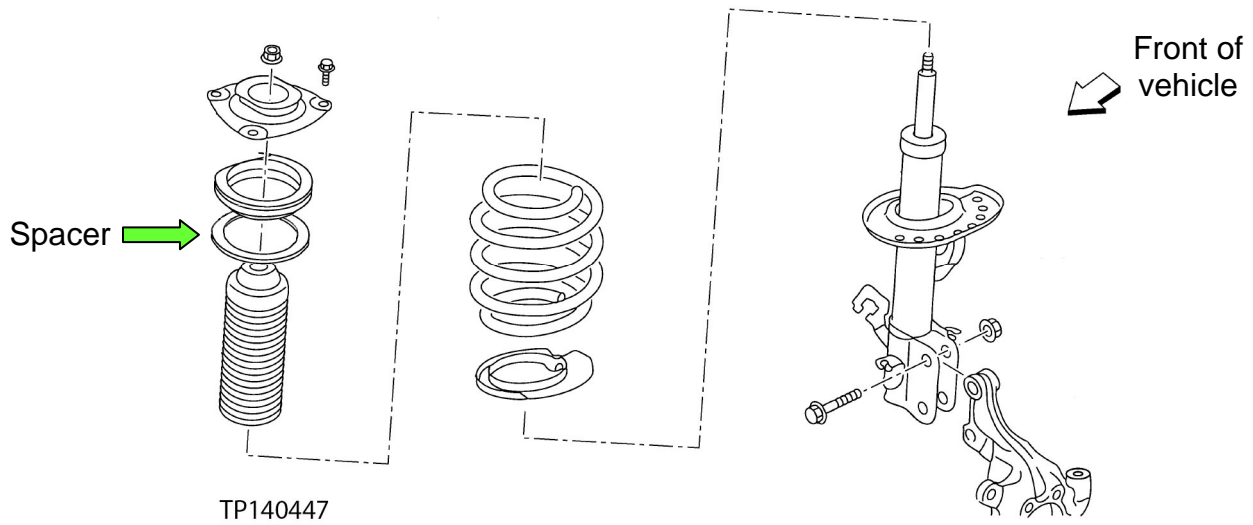

Direction of spacer installation

PARTS INFORMATION

MODEL	DESCRIPTION	PART NUMBER	QUANTITY
All APPLIED VEHICLES	SEAT-FRONT SPRING (spacer)	54034-4MA0A	2 *
Sentra, LEAF, and Juke	NUT (strut to knuckle)	54588-1HA0B	4 **
NV200 and Taxi		54588-ED00C	4 **
All APPLIED VEHICLES	NUT (strut rod)	54588-JP00D	2 *
	NUT (stabilizer bar)	01225-N2011	2 *

* One (1) per strut assembly.

** Two (2) per strut assembly.

CLAIMS INFORMATION

Submit a Primary Part (PP) type line claim using the following claims coding:

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Install Spacer – Both Sides	(1)	MA15AA	ZL	32	(2)

(1) Reference the electronic parts catalog (FAST or equivalent) and use the Front Coil Spring P/N (54010-XXXXX) as the PFP.

(2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated FRT.

