### **Technical Bulletin**



# SERVICE BULLETIN

 Classification:
 Reference:
 Date:

 TF15-003
 NTB15-070
 August 6, 2015

# 2008-2013 ROGUE AND 2014-2015 ROGUE SELECT; TRANSFER CASE LEAK AT ADAPTOR CASE SEALS

APPLIED VEHICLES: 2008-2013 Rogue (S35)

2014-2015 Rogue Select (S35)

#### IF YOU CONFIRM

An oil leak from the Adapter Case Oil Seal or the O-ring (see Figure 1).


**NOTE:** Please refer to NTB14-057 for fluid leak repair service information.

#### **ACTION**

**NOTE: DO NOT replace** the Transfer Case for a leak from the Adapter Case Oil Seal or the O-ring.

Reseal the Adapter Case with the seals listed in **PARTS INFORMATION** and shown in Figure 1.

 Refer to the Electronic Service Manual (ESM), section DLN – Driveline / TRANSFER: TY30A / UNIT DISASSEMBLY AND ASSEMBLY / ADAPTER CASE, for removal and installation.

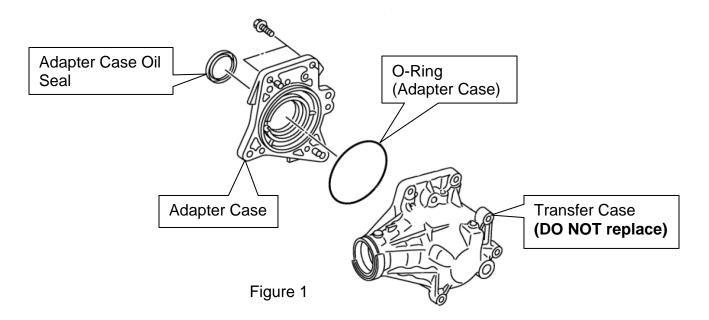

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

# **PARTS INFORMATION**

DESCRIPTION	ON PART#	
Seal-Oil, Ring Gear (Adapter Case Oil Seal)	33111-EN100	1
Seal-O Ring (O-Ring (Adaptor Case))	38343-JD60A	1

# **CLAIMS INFORMATION**

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Rpl Adapter Case Oil Seal & O-Ring	33111-EN100	KX03AA	ZR	53	3.0

2/2 NTB15-070