

**SCION iA**S-SB 0019-1S
12/23/15

2016 PRE-DELIVERY SERVICE CHECK SHEET

Dec 2015 Rev 1

BEFORE INSPECTION	OK	Adjust	Repair
1 Install AUDIO1 and ROOM fuses (See page 2).....	☐		
FUNCTIONAL OPERATION			
Apply parking brake and cycle ignition "IG-ON"; place gear selector in reverse; turn on lights and rear defogger. Unlock all doors, release fuel door, release trunk hatch.			
1 Check dome, courtesy, map, and sun visor lights*.....	☐	☐	☐
2 Check warning/indicator lights, gauges, and horn.....	☐	☐	☐
3 Check windshield wipers and washer.....	☐	☐	☐
4 Check headlights, instrument lights, turn signals, emergency flashers, and brake lights.....	☐	☐	☐
5 Check inside/outside rear view mirror operation/adjustment.....	☐	☐	☐
6 Check power outlet.....	☐	☐	☐
7 Check audio/navigation*/backup camera systems, and set clocks.....	☐	☐	☐
8 Set Oil Change Maintenance Monitor to 7,500 miles.....	☐		
WALKAROUND INSPECTION			
Start at left front door. Check window and door lock operation (from master power switch, if equipped). Continue around vehicle in a counterclockwise direction checking each door and window operation, child door locks, seat belts, interior condition, all lights, luggage compartment contents. Finish by checking headlight aim and continue into UNDER HOOD checks.			
1 Check door and door lock operation, including each wireless remote control/theft deterrent system*.....	☐	☐	☐
2 Check power window operation.....	☐	☐	☐
3 Check that engine starts with all keys.....	☐	☐	☐
4 Check seats and seat belt operation.....	☐	☐	☐
5 Check rear defogger.....	☐	☐	☐
6 Check side marker, tail, backup, and license plate lights.....	☐	☐	☐
7 Check rear hatch/cargo area trim appearance.....	☐	☐	☐
8 Adjust spare tire pressure, inspect for damage, and check jack and tool installation.....	☐	☐	☐
9 Check headlight aim.....	☐	☐	☐
UNDER HOOD			
1 Check engine oil and ATM* fluid levels.....	☐	☐	☐
2 Check brake and clutch* fluid levels.....	☐	☐	☐
3 Check engine coolant level.....	☐	☐	☐
4 Check windshield washer fluid level.....	☐	☐	☐
5 Check battery state-of-charge using Digital Battery System Analyzer (SOC Reading: _____%).....	☐	☐	☐
6 Inspect for fuel, oil, coolant, and other fluid leaks.....	☐	☐	☐
* Inspect or install when equipped/required.			

UNDER VEHICLE (ON HOIST)	OK	Adjust	Repair
1 Remove disc brake anti-rust covers/anti-corrosion wheel film*.....	☐		
2 Initialize Tire Pressure Warning System (TPWS) (See page 2).....	☐		
3 Inspect tires for defects/damage.....	☐	☐	☐
4 Install wheel caps (stored in glove box).....	☐	☐	☐
5 Inspect for fuel, oil, coolant, and other fluid leaks.....	☐	☐	☐
6 Visually check bolts and nuts on chassis and powertrain for looseness.....	☐	☐	☐
7 Inspect under the vehicle for damage, rust, etc.....	☐	☐	☐
ROAD TEST			
A complete road test helps assure customer satisfaction. Drive vehicle over a variety of road surfaces and driving conditions. Check for unusual noise and driving performance.			
Enter Odometer Readings			
Reading Before Test: _____ Reading After Test: _____			
1 Check cold engine operation.....	☐	☐	☐
2 Check engine operation during warm-up.....	☐	☐	☐
3 Check engine at normal operating temperature.....	☐	☐	☐
4 Check clutch/automatic transmission operation.....	☐	☐	☐
5 Check brake and parking brake operation.....	☐	☐	☐
6 Check steering operation and off-center/vehicle pull/flutter.....	☐	☐	☐
7 Inspect for abnormal noise and vibration.....	☐	☐	☐
8 Inspect for squeaks and rattles.....	☐	☐	☐
9 Check heater and A/C operation.....	☐	☐	☐
10 Check speedometer operation.....	☐	☐	☐
11 Check cruise control operation.....	☐	☐	☐
FINAL INSPECTION AND CLEANING			
1 Remove interior protective covers, unnecessary labels, tags, etc. (Remove just before delivery to customer).....	☐	☐	☐
2 Verify floor mat application and install using retaining clips*.....	☐	☐	☐
3 Visually inspect all interior parts for installation, damage, fit, dirt, etc.....	☐	☐	☐
4 Remove Rapgard™ film & clear protective bumper film*.....	☐	☐	☐
5 Wash and clean vehicle.....	☐	☐	☐
6 Inspect paint finish for scratches, chips, rust, dents, damage, etc.....	☐	☐	☐
7 Inspect exterior body parts for proper installation, damage, rust, etc.....	☐	☐	☐
8 Place oil change sticker on inside of windshield, top left corner.....	☐	☐	☐
9 Perform Techstream Health Check.....	☐	☐	☐
10 Install front license plate* (see page 2).....	☐	☐	☐
* Inspect or install when equipped/required.			

Completion and retention of this form is required to comply with Toyota's Warranty Policy.

TECHNICIAN'S SIGNATURE _____

SERVICE MANAGER'S SIGNATURE _____

NAME (PLEASE PRINT) _____

NAME (PLEASE PRINT) _____

Date

Dealer Name

Dealer Code


Vehicle Identification Number (Sticker)

We hereby certify that all items on this form have been checked and corrected for proper operation as required.

AUDIO1 Fuse & ROOM Fuse Installation

To minimize battery discharge, the AUDIO1 and ROOM fuses have been removed and are stored in the engine compartment relay block. Install the AUDIO1 and ROOM fuses (both 25A) and confirm all related DTCs are cleared.

1. Remove AUDIO1 Fuse (25A) and ROOM Fuse (25A)
2. Install ROOM Fuse (25A) into original location
3. Install AUDIO1 Fuse (25A) into original Location

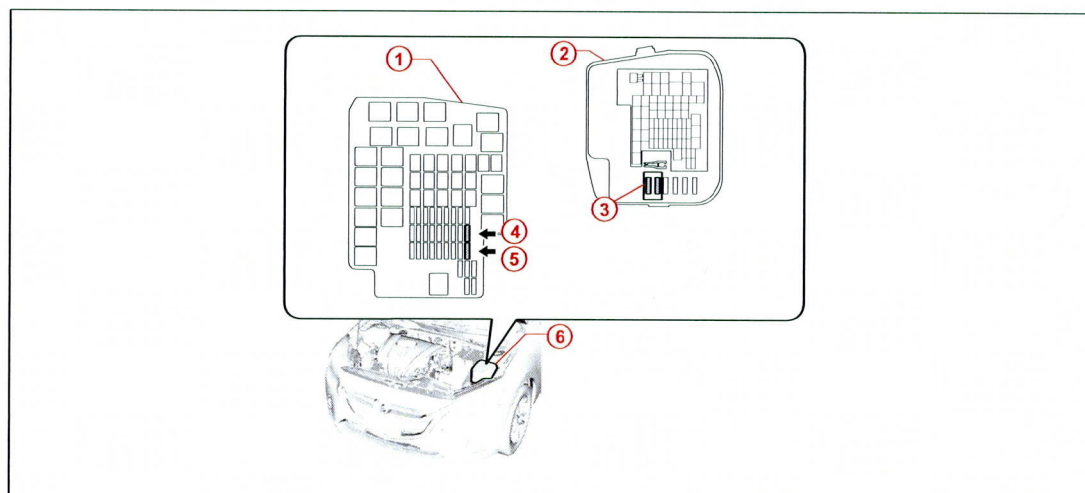

- 1 Relay and Fuse Block
- 2 Relay and Fuse Block Cover
- 3 Remove AUDIO1 Fuse (25A) and ROOM Fuse (25A)
- 4 Install ROOM Fuse (25A) here (Original Location)
- 5 Install AUDIO1 Fuse (25A) here (Original Location)
- 6 Relay and Fuse Block

TIRE PRESSURE WARNING SYSTEM (TPWS) INITIALIZATION

After adjusting all tires to the standard air pressure, perform initialization of the tire pressure warning system during PDS according to the procedure outlined below.

1. Park the vehicle in a safe, level ground.
2. Adjust all four tire pressures to the specification while the tires are cold.


NOTICE

In order for the tires to be considered "Cold", leave the vehicle for 1 hour or if the vehicle is driven, do so within 1.6 km (0.99 miles).

3. Switch the ignition switch ON (engine off or on).
4. Press and hold the tire pressure warning reset switch until the tire pressure monitoring system warning light flashes 1 or 2 times and the indicator alarm sounds 1 time.

HINT

- When the tire pressure warning system initialization is performed, learning initiates.
- While the tire pressure warning system is undergoing learning, its primary functions do not operate.

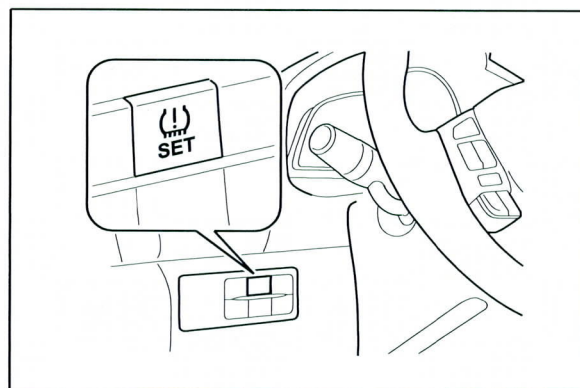

FRONT LICENSE PLATE INSTALLATION*

For states that require a front license plate, follow the front license plate installation procedure below.

1. Align the installation holes on the front license plate with the dimples on the front bumper.
2. Directly screw 2 self-tapping screws into the dimples to install the front license plate. Use self-tapping screws of a non-corroding type with the following dimensions.

Nominal Length: 15.0 – 20.0 mm (0.60 – 0.79 in.)

Diameter: 6.0 mm (0.24 in.)

NOTICE

- Do NOT pre-drill holes into the bumper.
- Do NOT overtighten the self-tapping screws.

