



Service Bulletin

INFORMATION

Subject: Information on Ordering New Delphi Style Fuel Pump


Attention: This Bulletin also applies to any of the models that may be Export vehicles.

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Silverado	2016	2016			5.3L Engine (RPO L83)	8 Speed Transmission (RPO M5U)
GMC	Sierra	2016	2016			5.3L Engine (RPO L83)	8 Speed Transmission (RPO M5U)


The purpose of this Bulletin is to inform dealership personnel that when replacing the fuel pump, the vehicle should be serviced with the same style high pressure fuel pipe and SIDI fuel pump it was equipped with for the following reasons:

- DTC P00C6 may set during cold starts.
- DTCs P228C and P228D may be set during other extreme hot or cold driving.

Note: A note will be added in the Parts Catalog to ensure that the technician orders and replaces the fuel pump with the correct part number and style.

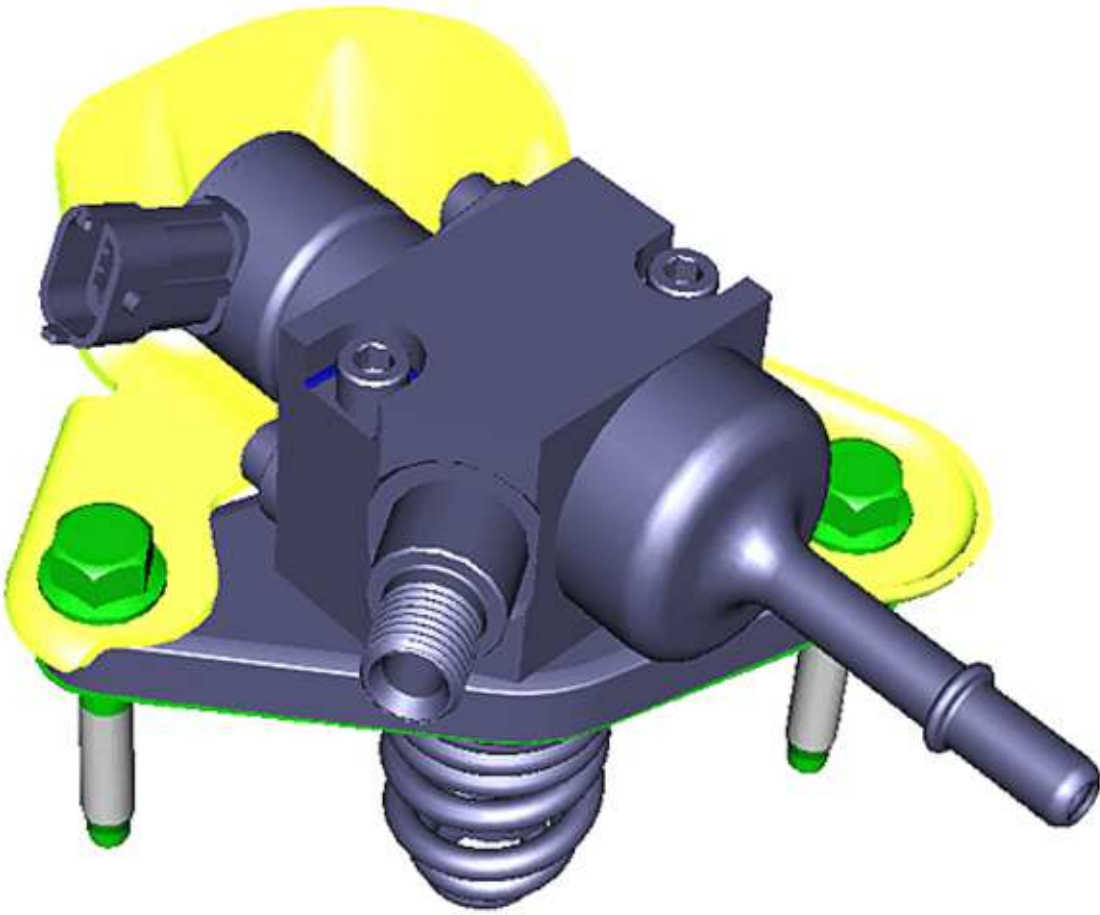

Stanadyne style fuel pump part number 12669519 and fuel pipe part number 12673077 as shown above.

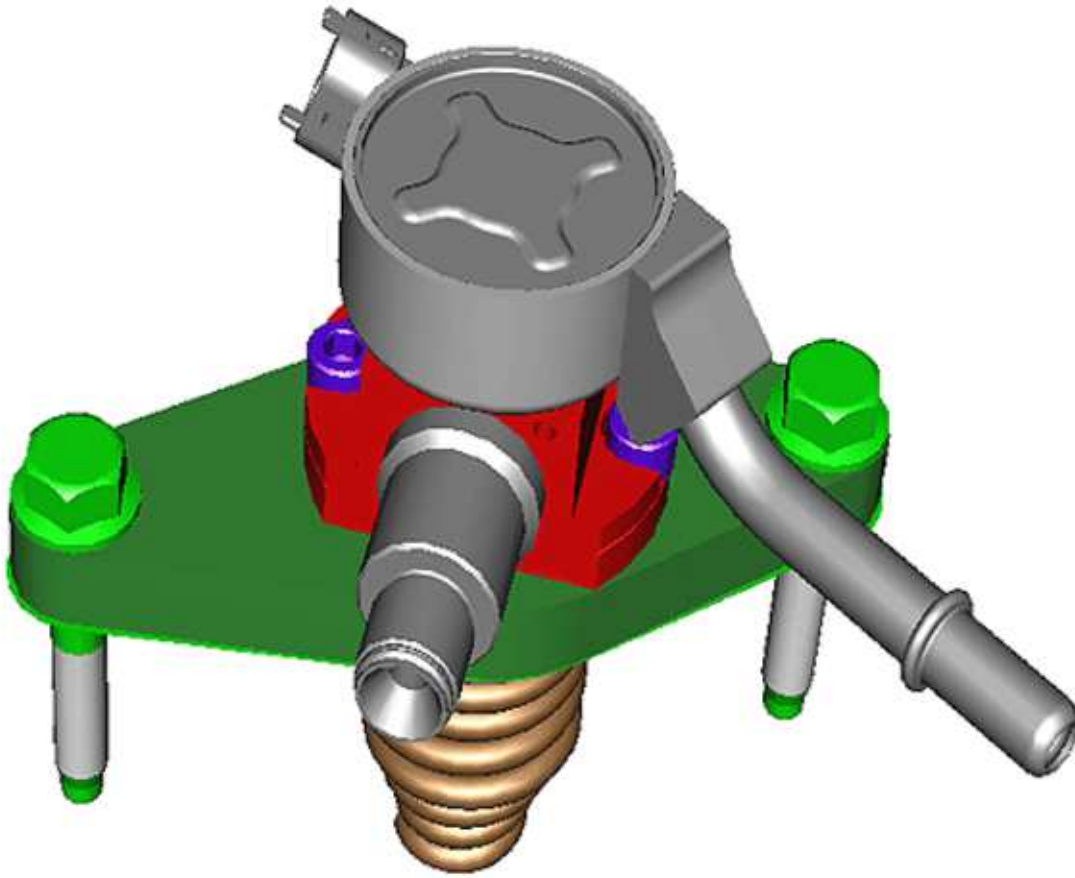

Delphi style fuel pump part number 12673522 and fuel pipe part number 12673079 as shown above.

Version	1
Modified	

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION