



Service Bulletin

File in Section: -

Bulletin No.: PIP5335

Date: October, 2015

PRELIMINARY INFORMATION

Subject: SES Lamp With Camshaft Position Codes

Models: 2015-2016 Cadillac Escalade
2014-2016 Chevrolet Silverado 1500
2015-2016 Chevrolet Suburban, Tahoe
2014-2016 GMC Sierra 1500
2015-2016 GMC Yukon Yukon XL
Built with RPO's 4.3L 5.3L 6.2L L83 L86 LV3

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.


Condition/Concern

A vehicle may be setting DTC's P0340 and P0341 at times

Recommendation/Instructions

If normal SI Diagnostics does not isolate the concern, inspect for corrosion in connector X154 located on the front cover next to the vacuum pump.

See the illustration below

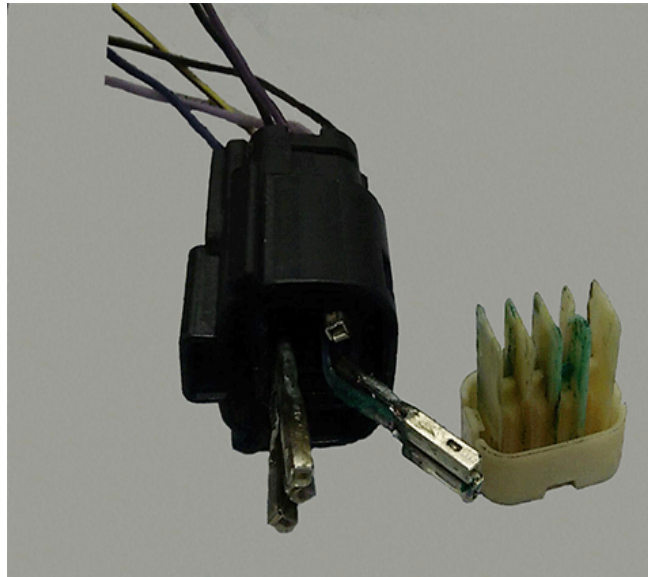

4284436

If this condition is encountered repair as needed.

Warranty Information

For wiring repairs covered under warranty, please refer to latest version of bulletin 10-00-89-005 for warranty information on wire/connector repairs.

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.