


| | |
|----------------------|---|
| Reference | SSM72190 |
| Models | XF / X250 |
| Title | X250 Saloon Headlining Rattle and Creaking Noises |
| Category | Body |
| Last modified | 20-Feb-2015 00:00:00 |
| Symptom | 107000 Interior Trim |
| Attachments | SSM Attachment2.pdf |
| Content | <p><u>Issue:</u> JLR have seen a number of warranty claims reporting various headlining creaks and rattles</p> <p><u>Cause:</u> The clips used to secure our headliners on X250 are one use only. (please view attachment). When removing the headliner the clip mechanism will become damaged and the headliner will not will not be secure.</p> <p><u>Action:</u> When headliner has been removed or partially removed please replace all clips.</p> |



C2Z11575

C2Z11576

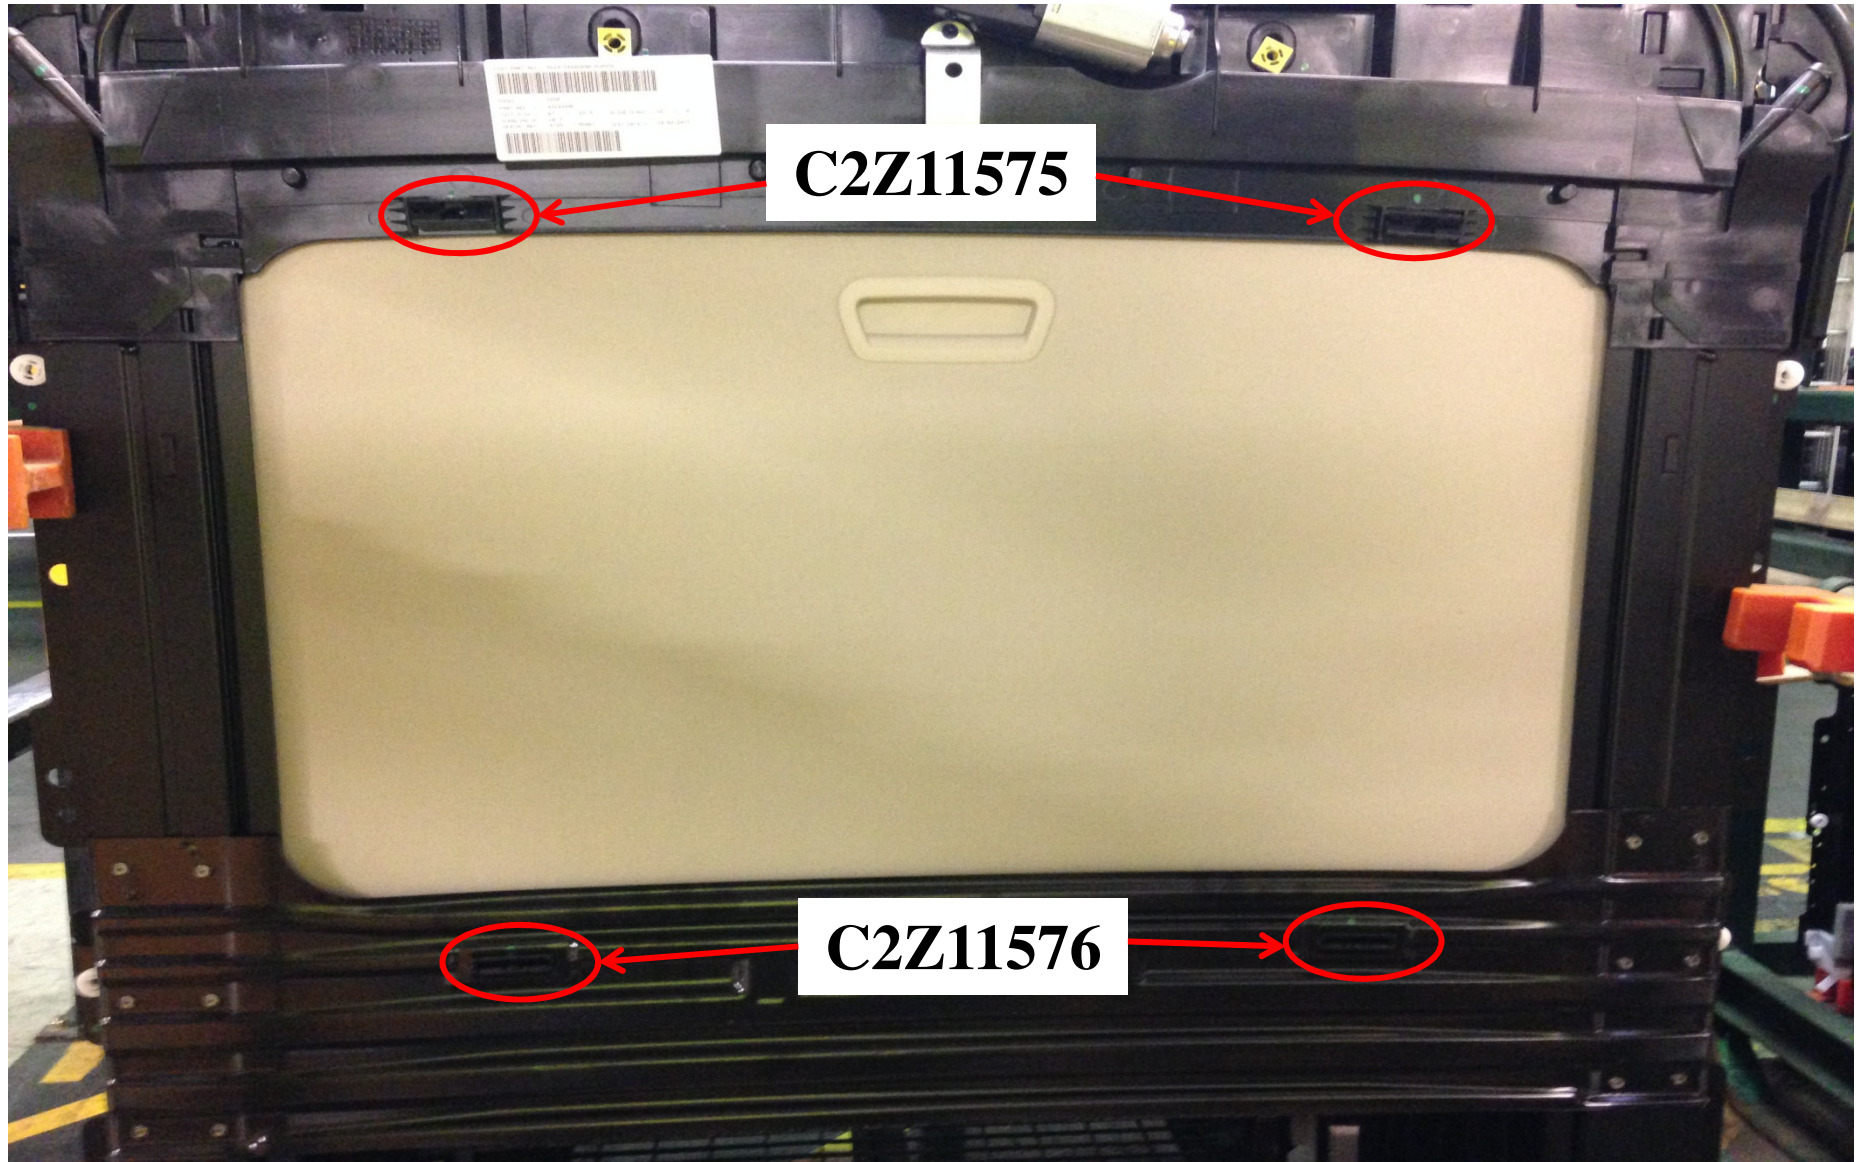