


VEHICLES EQUIPPED WITH SKYACTIV *MIL ON WITH DTC P0882:00*

Some customers may complain about a MIL ON with DTC P0882:00 (TCM Power Supply Voltage Low). Loose battery terminals may be the cause.

Check battery terminals for looseness. If loose, torque battery terminals to specification, then erase DTC(s).

Battery Terminal Torque: 36-53 in-lbf (22-30 Nm)

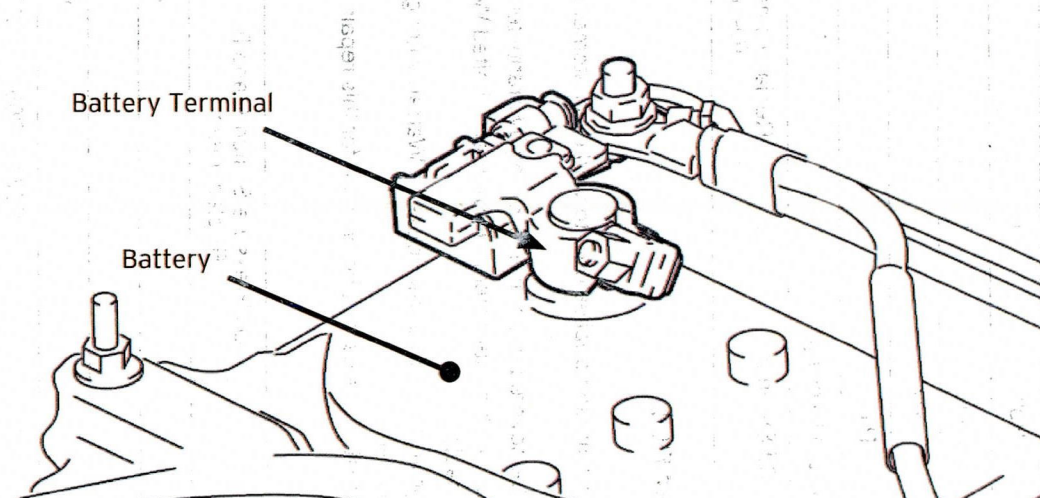

An editorial board comprised of MNAO service staff members generates, collects, and verifies information for this publication. © 2015 Mazda Motor of America, Inc.

To contribute repair tip ideas, send an e-mail to mtips@mazdausa.com or fax to (949) 442-6599. If we select your repair tip, you will receive 10,000 Reward Performance by Mazda (RPM) points for your efforts. All contributions become property of MNAO, which assumes permission to publish them without further consideration.