

	GROUP Body Electrical	MODEL 2017 MY Soul and Sedona with Base Audio
	NUMBER PS 462	DATE September 2016
 		
SUBJECT: NEW BASE AUDIO SYSTEM IN 2017MY SOUL AND SEDONA		

This pitstop provides information regarding the functionality on the latest generation Base Audio system (designated Audio 4.0 B) that has been applied on 17 MY Soul and Sedona.



The picture below depicts the head unit and button layout on the 17 MY Sedona.



Some of the functionality differences to note in this system compared to previous Base Audio systems are:

1. The radio mode has 40 integrated Sirius XM, AM, FM presets and allows the customer to choose Sirius XM smart presets in which content is recorded during the driving trip (with limitations) and customer can choose to play live or go back to pre-recorded content.

2. The voice recognition functionality in this head unit requires that an iPhone be paired and connected in order to use Siri Eyes Free to perform phone related functions. The voice recognition is provided through the device and is dependent on the phone iOS. The head unit does not contain a voice engine so the Push to Talk (Voice) button is not operational without a paired and connected iPhone. The message below displays if the button is pressed prior to connecting an iPhone:

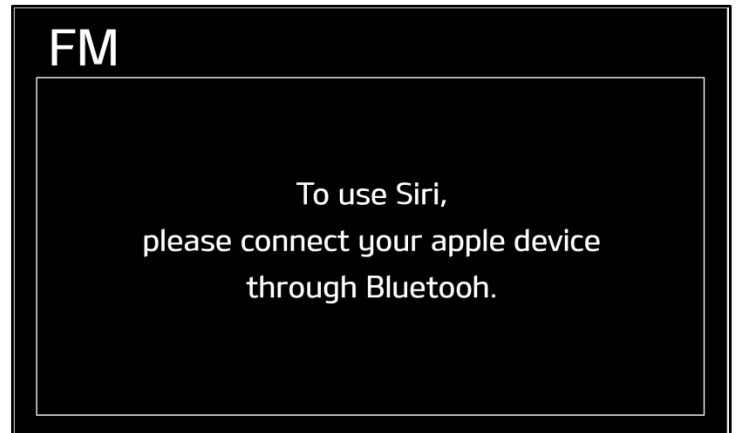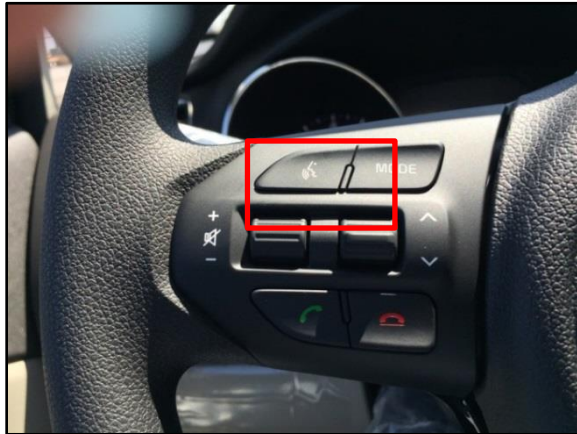

Some items to note regarding the functionality when using Siri:

- Press the voice button to activate Siri.
 - Press and hold the voice button to cancel Siri.
 - Siri automatically stops in the following situations:
 - During an outgoing and incoming phone call.
 - When media is connected (Note: Siri mode is maintained when in iPod mode).
 - When the rear camera is activated.
 - When the vehicle engine is turned off.
 - When screen transition buttons such as RADIO or MEDIA are selected.
3. The DISP button allows the customer to easily turn off/on the display.

★ NOTICE

If a customer complains that the display is black, press the DISP button to confirm that the display has not been turned off